Linear

Tour Forty8 TR0295

Linear track luminaire



Linear track luminaire. 13 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **13 W**	Voltage **48 V DC**	Luminous flux **1040 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 36°**
IP rating **IP20**	Certifications **CE**	Mounting **Magnetic track**
Finishes **Black**		


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
TR0295	13 W	48 V DC	1040 lm	97 CRI	249 × 85 mm	24° 36°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0295, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


TR0295, 13 W, 24° beam

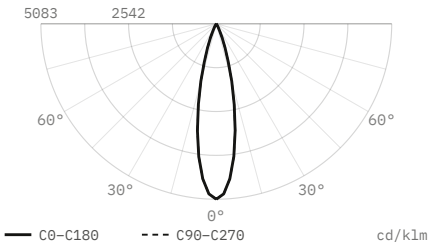


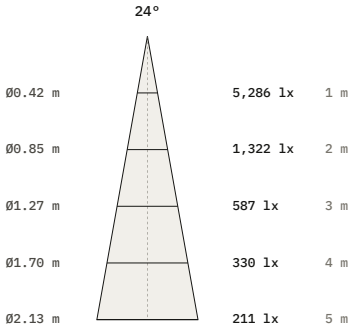

Luminous flux	1,040 lm
Efficacy	80 lm/W
Peak intensity	5,286 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	249 × 85 mm
Data	Calculated from catalogue data

TR0295, 13 W, 36° beam

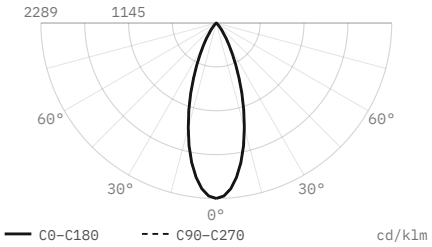

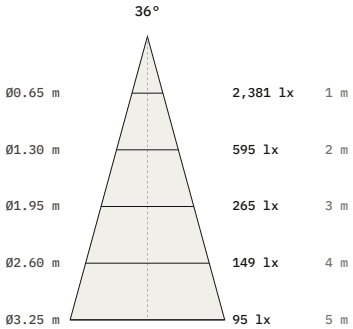

Luminous flux	1,040 lm
Efficacy	80 lm/W
Peak intensity	2,381 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	249 × 85 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.