Track Spotlights

Tour TR0086

Track spotlight




Track spotlight. 26 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **26 W**	Voltage **48 V DC**	Luminous flux **2600 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE, Class III**	Mounting **Magnetic track**
Finishes **Black**		

Dimensions

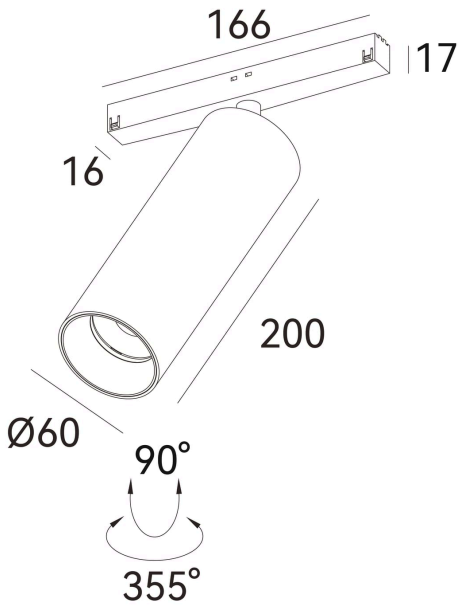


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
TR0086	26 W	48 V DC	2600 lm	97 CRI	Ø60 × 200 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0086, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


TR0086, 26 W, 15° beam

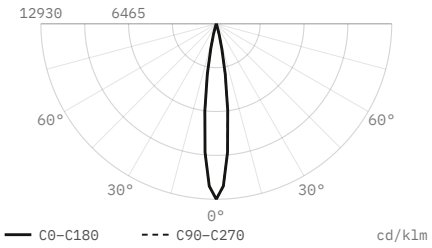


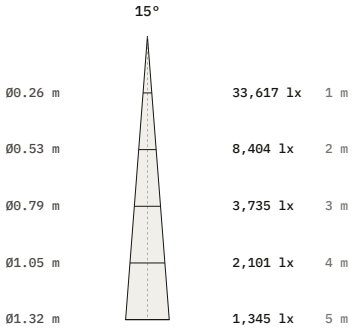

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	33,617 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data


TR0086, 26 W, 24° beam

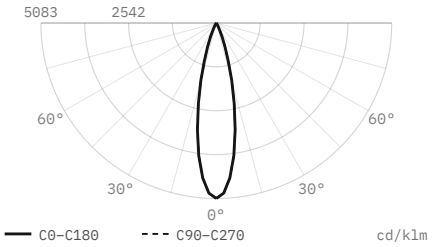


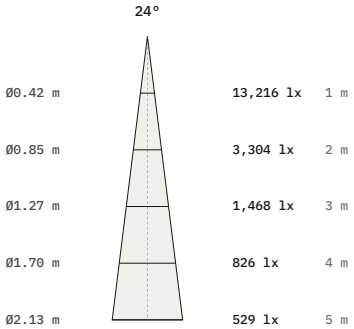

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	13,216 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data


TR0086, 26 W, 36° beam

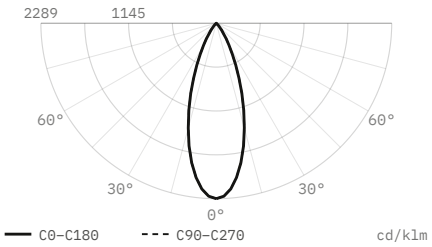


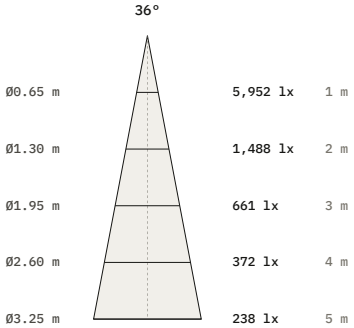

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	5,952 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

TR0086, 26 W, 50° beam

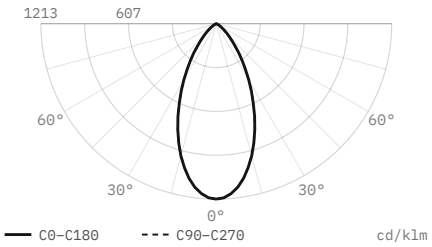

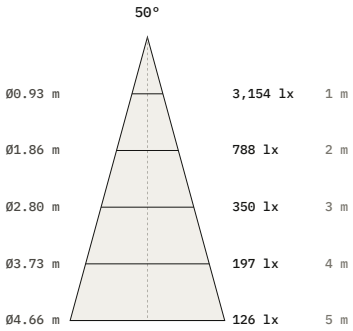

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	3,154 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.