Suspension

Tour TR0101

Pendant




Pendant. 4 W. 35° or 50° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **4 W**	Voltage **48 V DC**	Luminous flux **320 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **35°, 50°**
IP rating **IP20**	Certifications **CE, Class III**	Mounting **Suspended, Magnetic track**
Finishes **Black**		

Dimensions

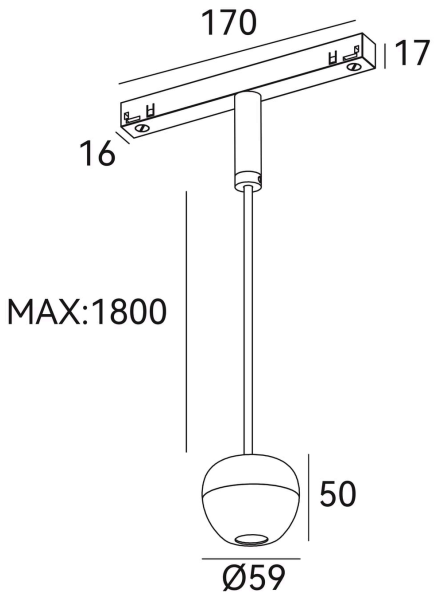


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
TR0101	4 W	48 V DC	320 lm	97 CRI	Ø59 × 50 mm	35° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0101, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


TR0101, 4 W, 35° beam

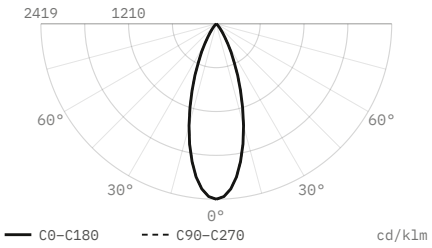


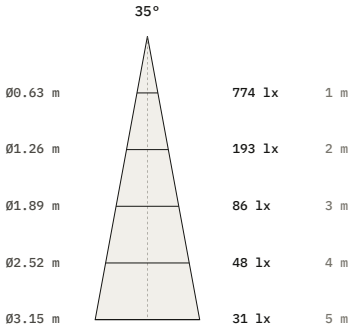

Luminous flux	320 lm
Efficacy	80 lm/W
Peak intensity	774 cd, 2,419 cd/klm
Beam angle (50%)	35°
Field angle (10%)	63.8°
Cut-off angle (2.5%)	40°
Flux 0–30° / 30–60° / 60–90°	87.6 / 12.4 / 0 %
Size	Ø59 × 50 mm
Data	Calculated from catalogue data

TR0101, 4 W, 50° beam

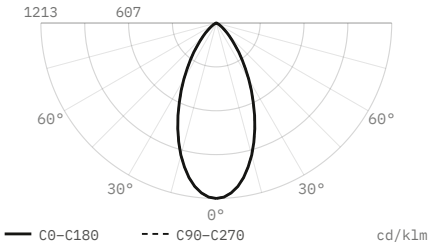

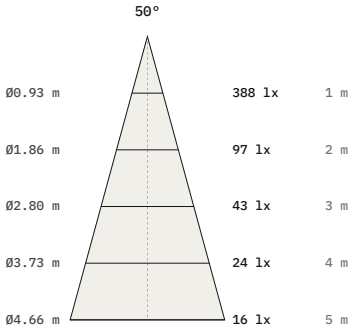

Luminous flux	320 lm
Efficacy	80 lm/W
Peak intensity	388 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø59 × 50 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.