Linear

Tour TR0204

Linear track luminaire



Linear track luminaire. 15 W. 90° beam. 2700, 3000, 4000 K. 97 CRI.


- LED source: Citizen

Power	Voltage	Luminous flux
15 W	48 V DC	1180 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	90°
IP rating	**Certifications**	**Mounting**
IP20	CE, Class III	Magnetic track

Finishes

Black

Dimensions

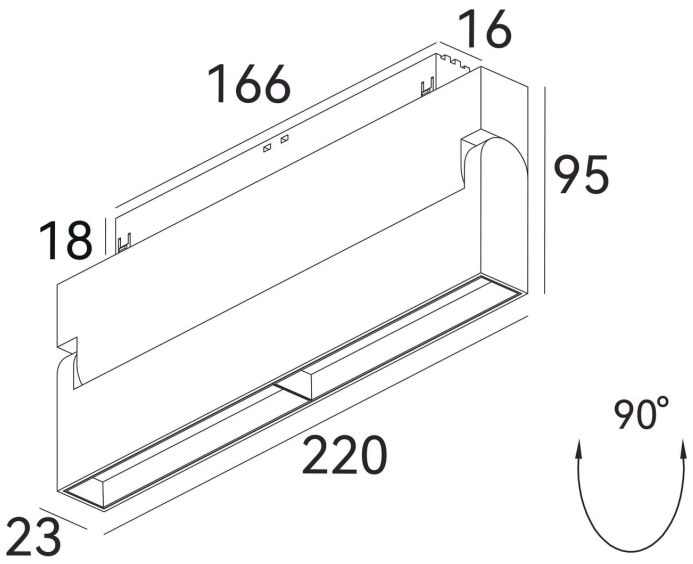


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
TR0204	15 W	48 V DC	1180 lm	97 CRI	L220 x W23 x H95 mm	90°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0204, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0204, 15 W, 90° beam

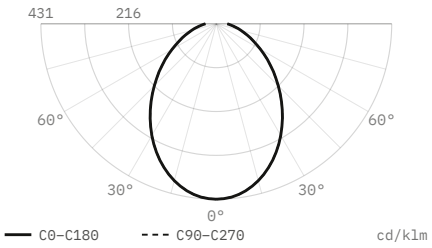

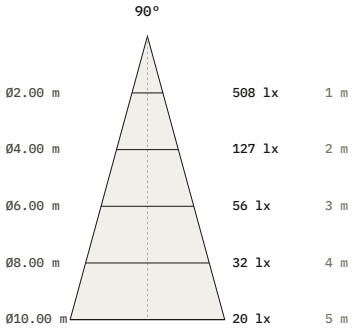

Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	508 cd, 431 cd/klm
Beam angle (50%)	90°
Field angle (10%)	164°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	31.2 / 48 / 20.8 %
Size	220 × 23 × 95 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.