Linear

TR0202

Linear track luminaire



Linear track luminaire. 26 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
26 W	230 V AC	2160 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	24°, 36°
IP rating	**Certifications**	**Mounting**
IP20	CE	Magnetic track

Finishes

Black


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
TR0202	26 W	230 V AC	2160 lm	97 CRI	Head L436 × 22 × 25 mm; adapter L163 x W32 x H41 mm	24° 36°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0202, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


TR0202, 26 W, 24° beam

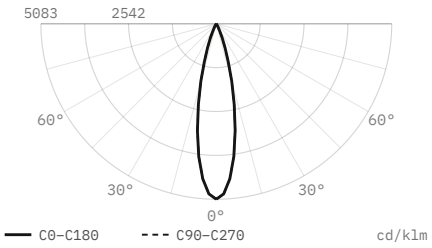


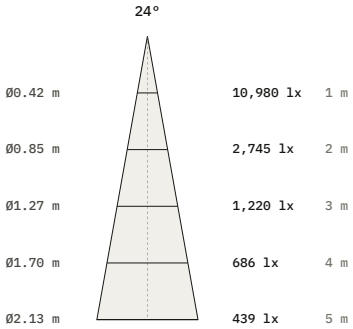

Luminous flux	2,160 lm
Efficacy	83 lm/W
Peak intensity	10,980 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	436 × 0 mm
Data	Calculated from catalogue data

TR0202, 26 W, 36° beam

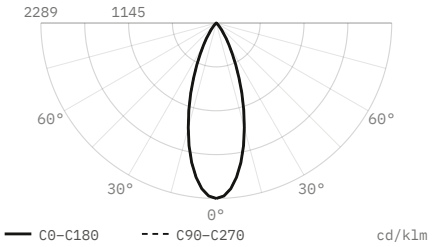

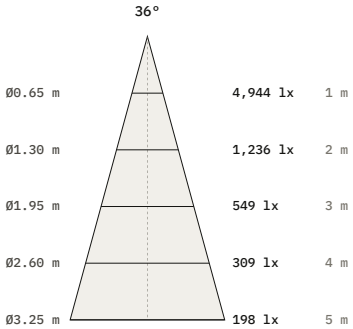

Luminous flux	2,160 lm
Efficacy	83 lm/W
Peak intensity	4,944 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	436 × 0 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.