Track Spotlights

Track TR0122-0129

Track spotlight




Track spotlight. 8 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **8 W**	Voltage **230 V AC**	Luminous flux **730 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Magnetic track**
Control **On/Off**	Finishes **White, Black**	

Dimensions

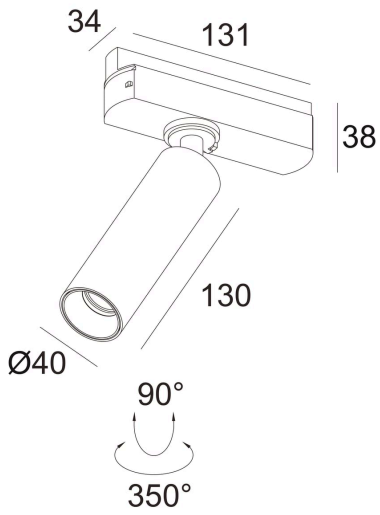


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
TR0122	8 W	230 V AC	730 lm	97 CRI	Tube Ø40 × 130 mm; adapter 131 × 34 × 38 mm	15° 24° 36° 50°

Finishes



Black





White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0122, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


TR0122, 8 W, 15° beam

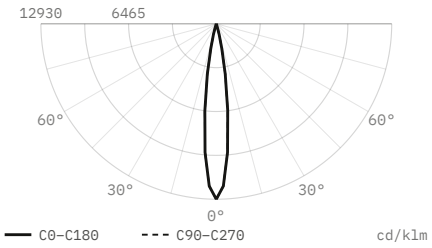


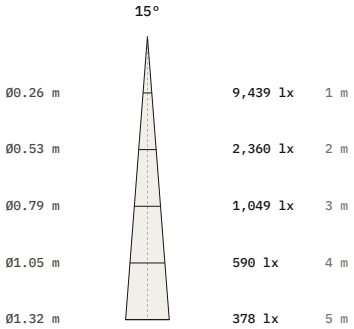

Luminous flux	730 lm
Efficacy	91 lm/W
Peak intensity	9,439 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø40 × 130 mm
Data	Calculated from catalogue data


TR0122, 8 W, 24° beam

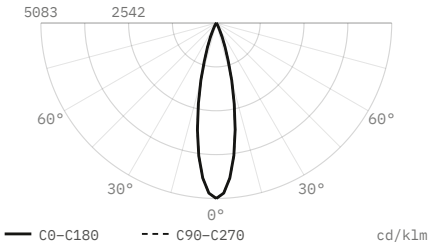


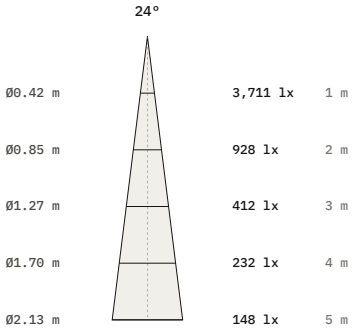

Luminous flux	730 lm
Efficacy	91 lm/W
Peak intensity	3,711 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø40 × 130 mm
Data	Calculated from catalogue data


TR0122, 8 W, 36° beam

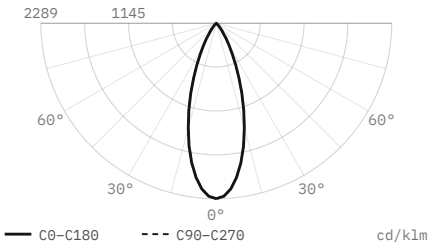


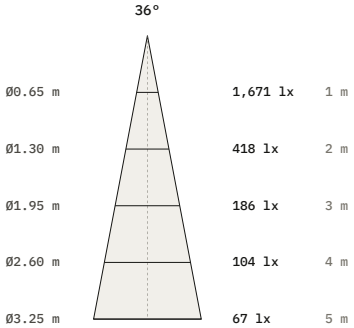

Luminous flux	730 lm
Efficacy	91 lm/W
Peak intensity	1,671 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø40 × 130 mm
Data	Calculated from catalogue data

TR0122, 8 W, 50° beam

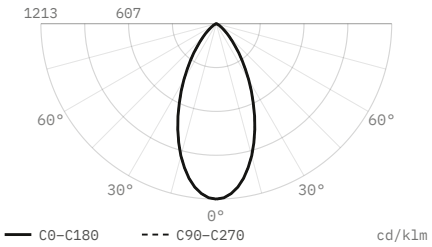

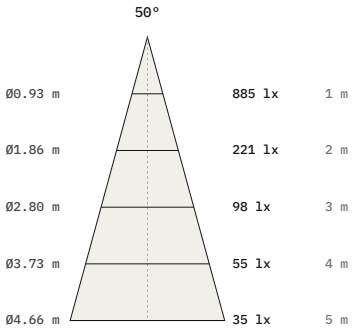

Luminous flux	**730 lm**
Efficacy	**91 lm/W**
Peak intensity	**885 cd, 1,213 cd/klm**
Beam angle (50%)	**50°**
Field angle (10%)	**91.1°**
Cut-off angle (2.5%)	**57.5°**
Flux 0–30° / 30–60° / 60–90°	**64.8 / 33.6 / 1.5 %**
Size	**Ø40 × 130 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.