Downlights

Vero DL1423

Recessed spotlight

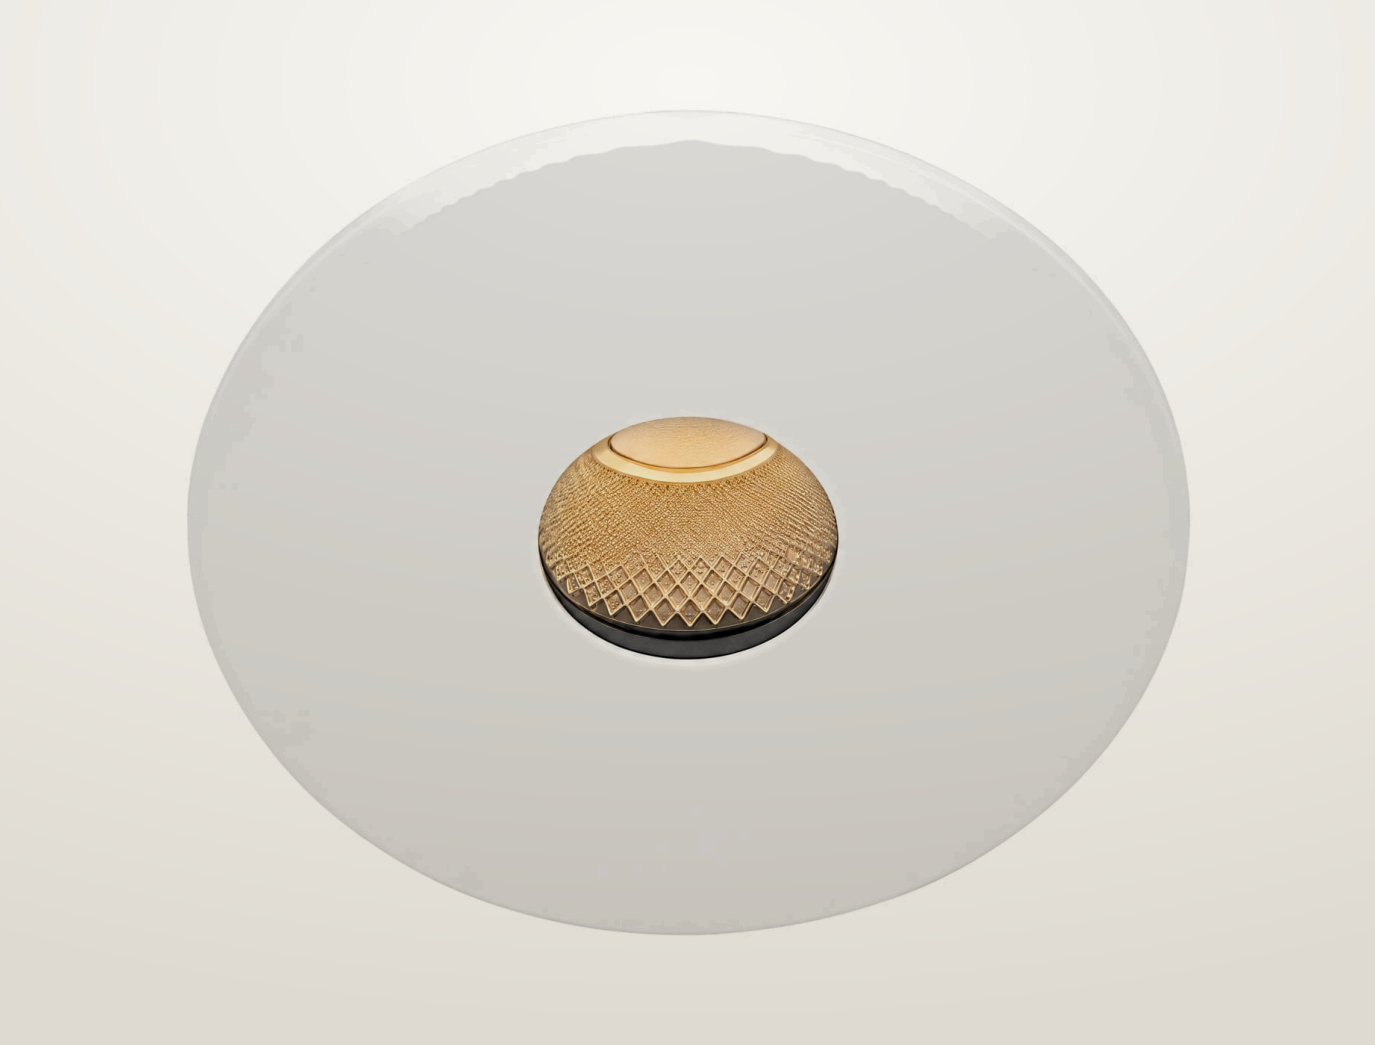

Recessed spotlight. 5 or 7 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø35 mm
- LED source: Citizen

Power **5 W, 7 W**	Voltage **max 19 V**	Luminous flux **400 lm, 560 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **White**		

Dimensions

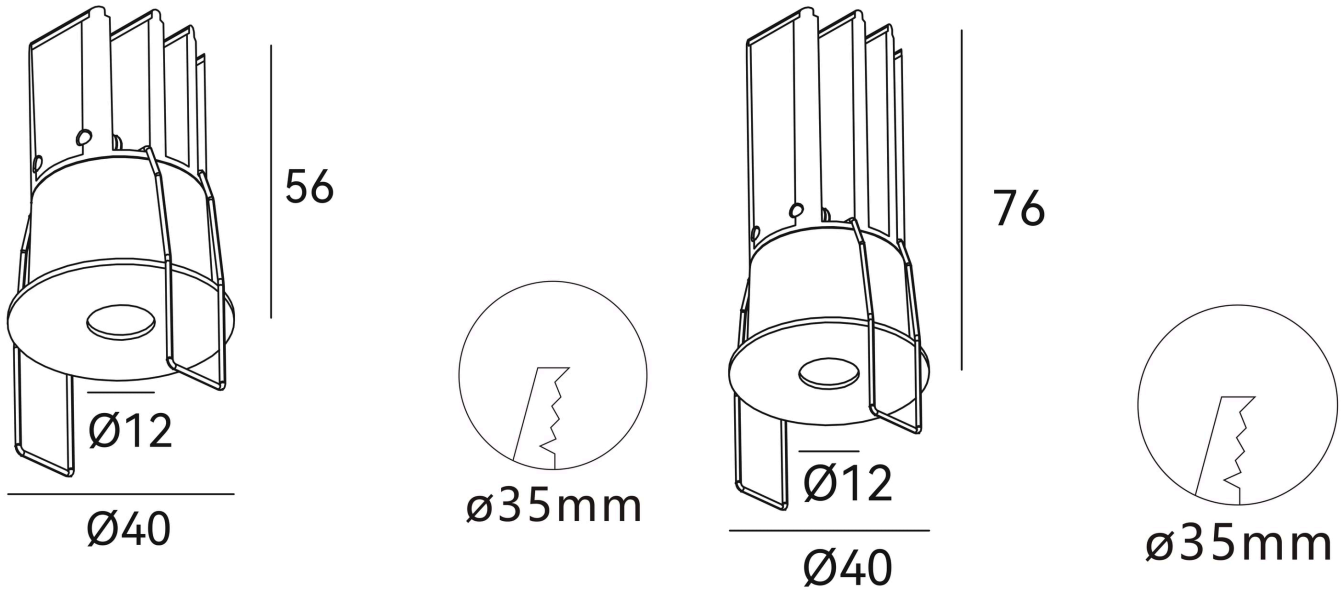

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1423	5 W	max 19 V	400 lm	97 CRI	Ø40 × 56 mm	Ø35 mm	15° 24° 36° 50°	250 mA
DL1584	7 W	max 19 V	560 lm	97 CRI	Ø40 × 76 mm	Ø35 mm	15° 24° 36° 50°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1584, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1584, 7 W, 15° beam

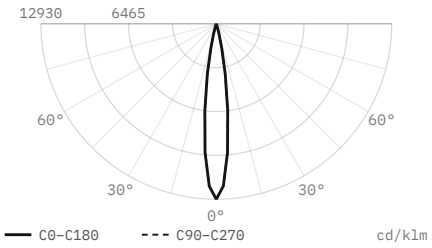

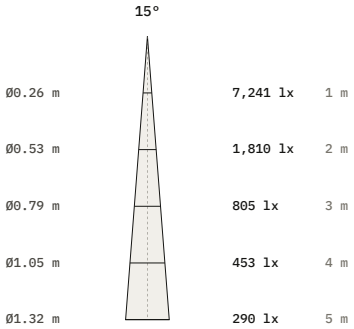

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	7,241 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø40 × 76 mm
Data	Calculated from catalogue data

DL1584, 7 W, 24° beam

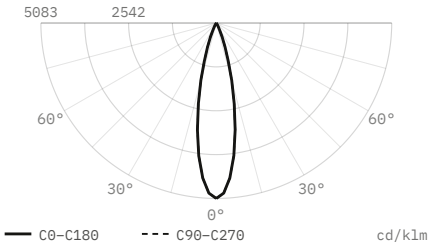

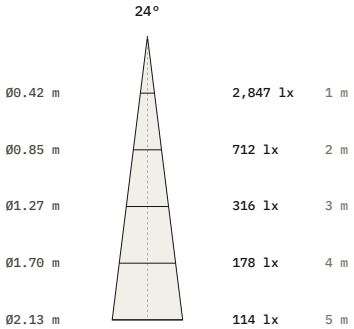

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	2,847 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø40 × 76 mm
Data	Calculated from catalogue data

DL1584, 7 W, 36° beam

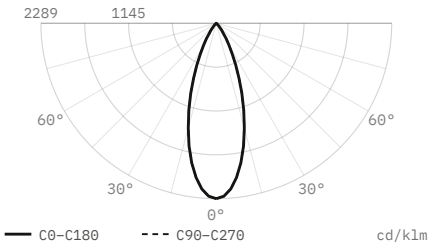

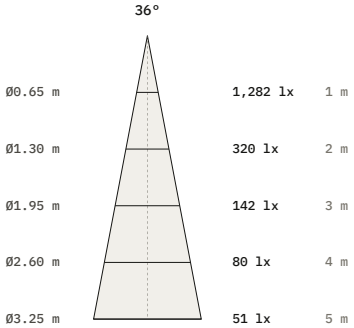

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	1,282 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø40 × 76 mm
Data	Calculated from catalogue data

DL1584, 7 W, 50° beam

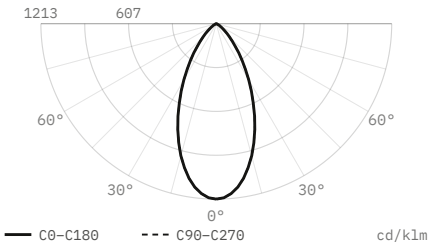

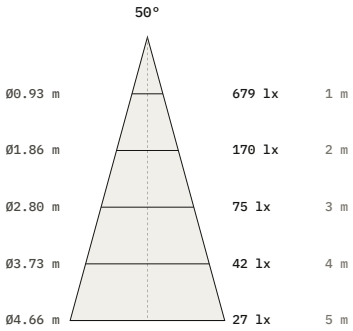

Luminous flux	**560 lm**
Efficacy	**80 lm/W**
Peak intensity	**679 cd, 1,213 cd/klm**
Beam angle (50%)	**50°**
Field angle (10%)	**91.1°**
Cut-off angle (2.5%)	**57.5°**
Flux 0–30° / 30–60° / 60–90°	**64.8 / 33.6 / 1.5 %**
Size	**Ø40 × 76 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.