Wall Lamps

Q13

Wall light




Wall light. 8 W. Three beam angles, 15° to 36°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
8 W	**36 V**	**2700 K, 3000 K, 4000 K**
CRI	Beam angles	IP rating
97 CRI	**15°, 24°, 36°**	**IP20**
Mounting	Control	Finishes
Wall	**On/Off**	**Black**

Dimensions

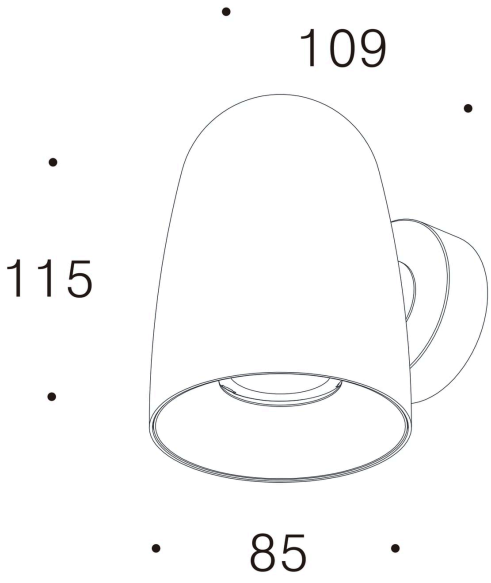


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
WA-Q13-1001A	8 W	36 V	97 CRI	85 × 109 × 115 mm	15° 24° 36°	200 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WA-Q13-1001A, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


WA-Q13-1001A, 8 W, 15° beam

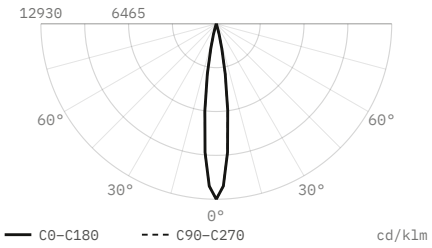


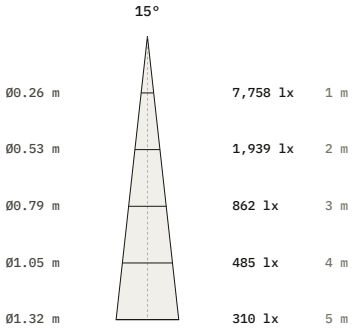

Luminous flux	600 lm
Efficacy	75 lm/W
Peak intensity	7,758 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	109 × 85 × 115 mm
Data	Estimated from catalogue data


WA-Q13-1001A, 8 W, 24° beam

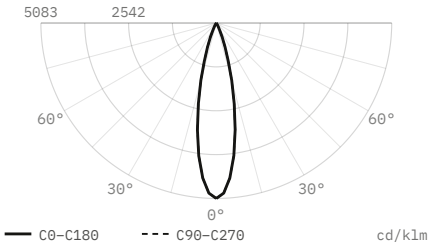


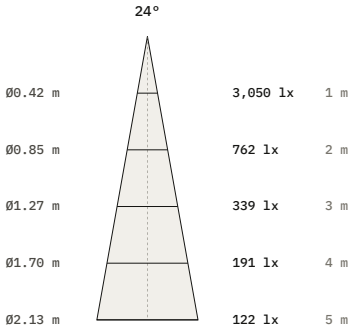

Luminous flux	600 lm
Efficacy	75 lm/W
Peak intensity	3,050 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	109 × 85 × 115 mm
Data	Estimated from catalogue data

WA-Q13-1001A, 8 W, 36° beam

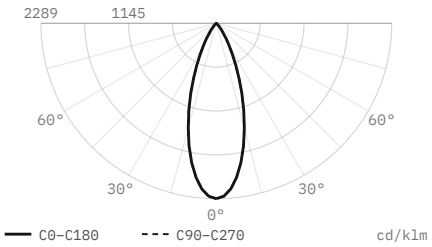

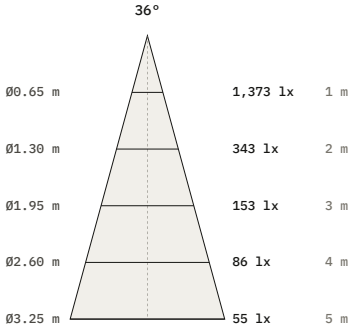

Luminous flux	600 lm
Efficacy	75 lm/W
Peak intensity	1,373 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	109 × 85 × 115 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.