
Suspension

Zoom PH0011

Pendant

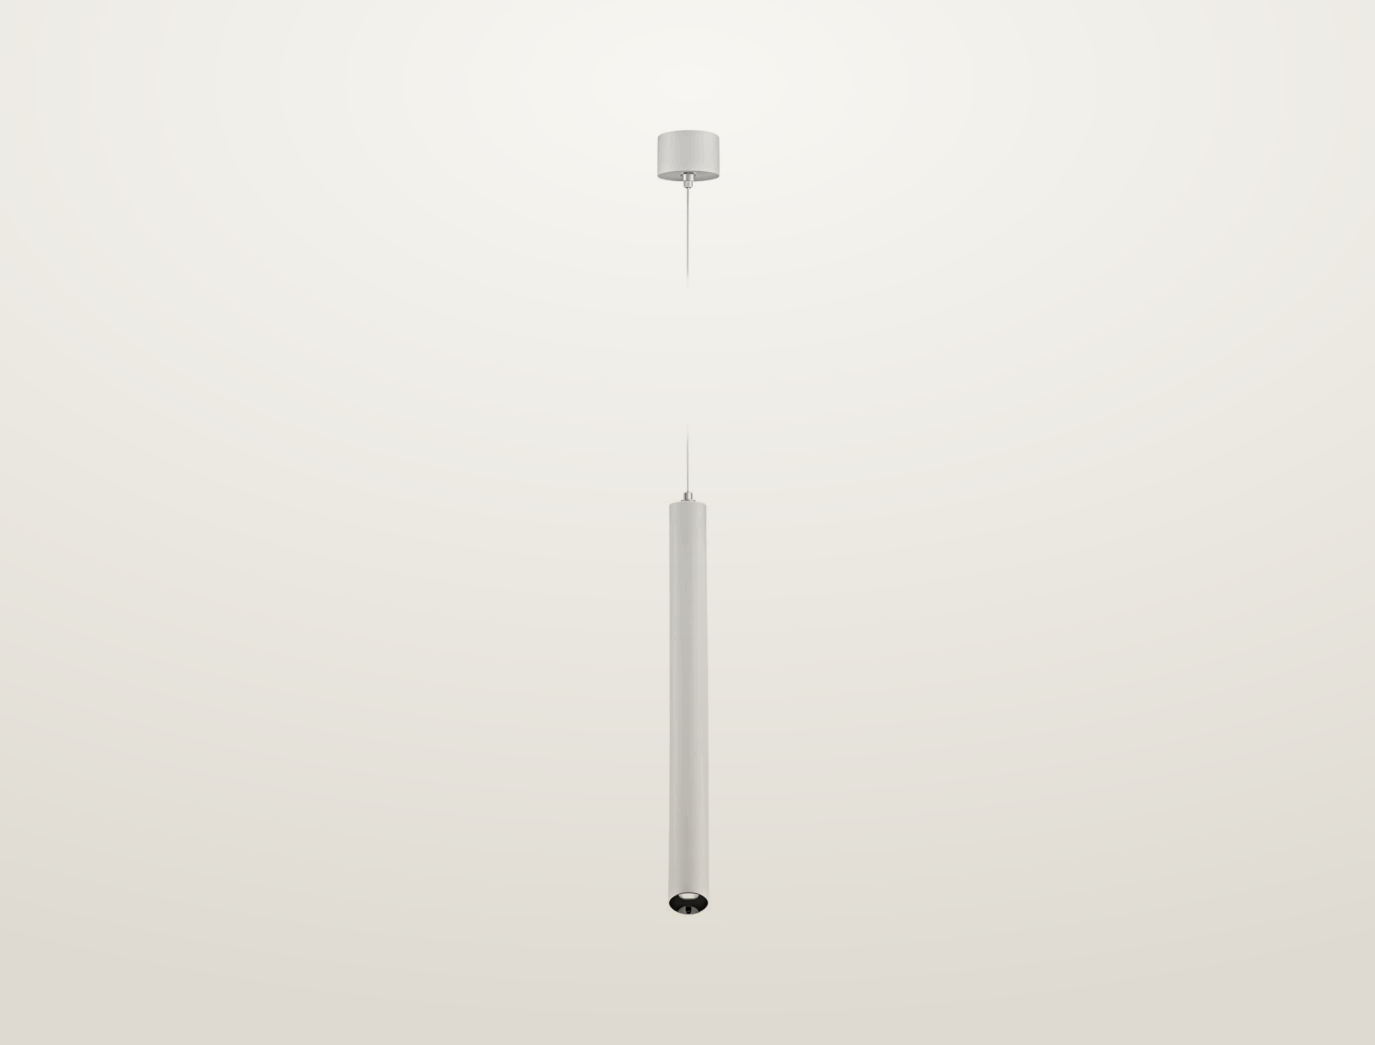


Pendant. 15 W. Three beam angles, 24° to 60°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **15 W**	Voltage **230 V AC**	Luminous flux **1180 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 36°, 60°**
IP rating **IP20**	Certifications **CE**	Mounting **Suspended**
Finishes **White**		

Dimensions

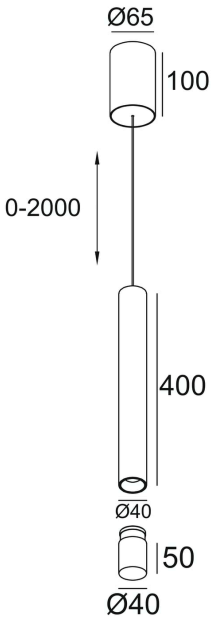


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
PH0011	15 W	230 V AC	1180 lm	97 CRI	Ø40 × 400 mm; canopy Ø65 × 100 mm; suspension 0–2000 mm	24° 36° 60°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0011, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


PH0011, 15 W, 24° beam

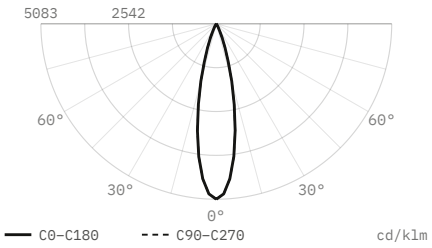


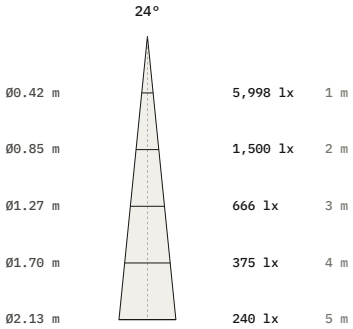

Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	5,998 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø40 × 400 mm
Data	Calculated from catalogue data


PH0011, 15 W, 36° beam

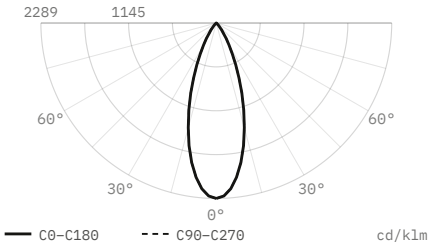


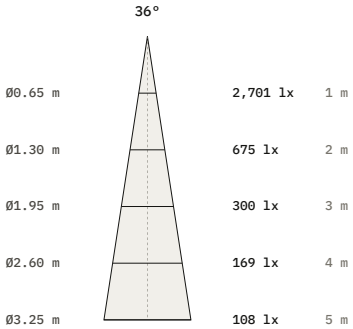

Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	2,701 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø40 × 400 mm
Data	Calculated from catalogue data

PH0011, 15 W, 60° beam

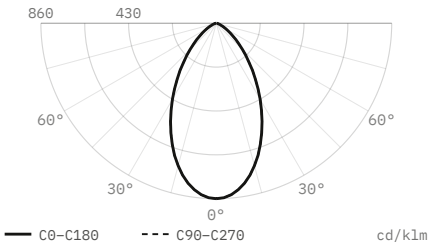

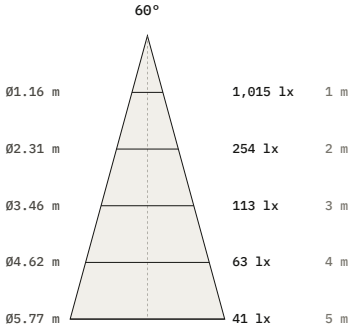

Luminous flux	1,180 lm
Efficacy	79 lm/W
Peak intensity	1,015 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø40 × 400 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.