
Suspension

Zoom PH0018

Pendant

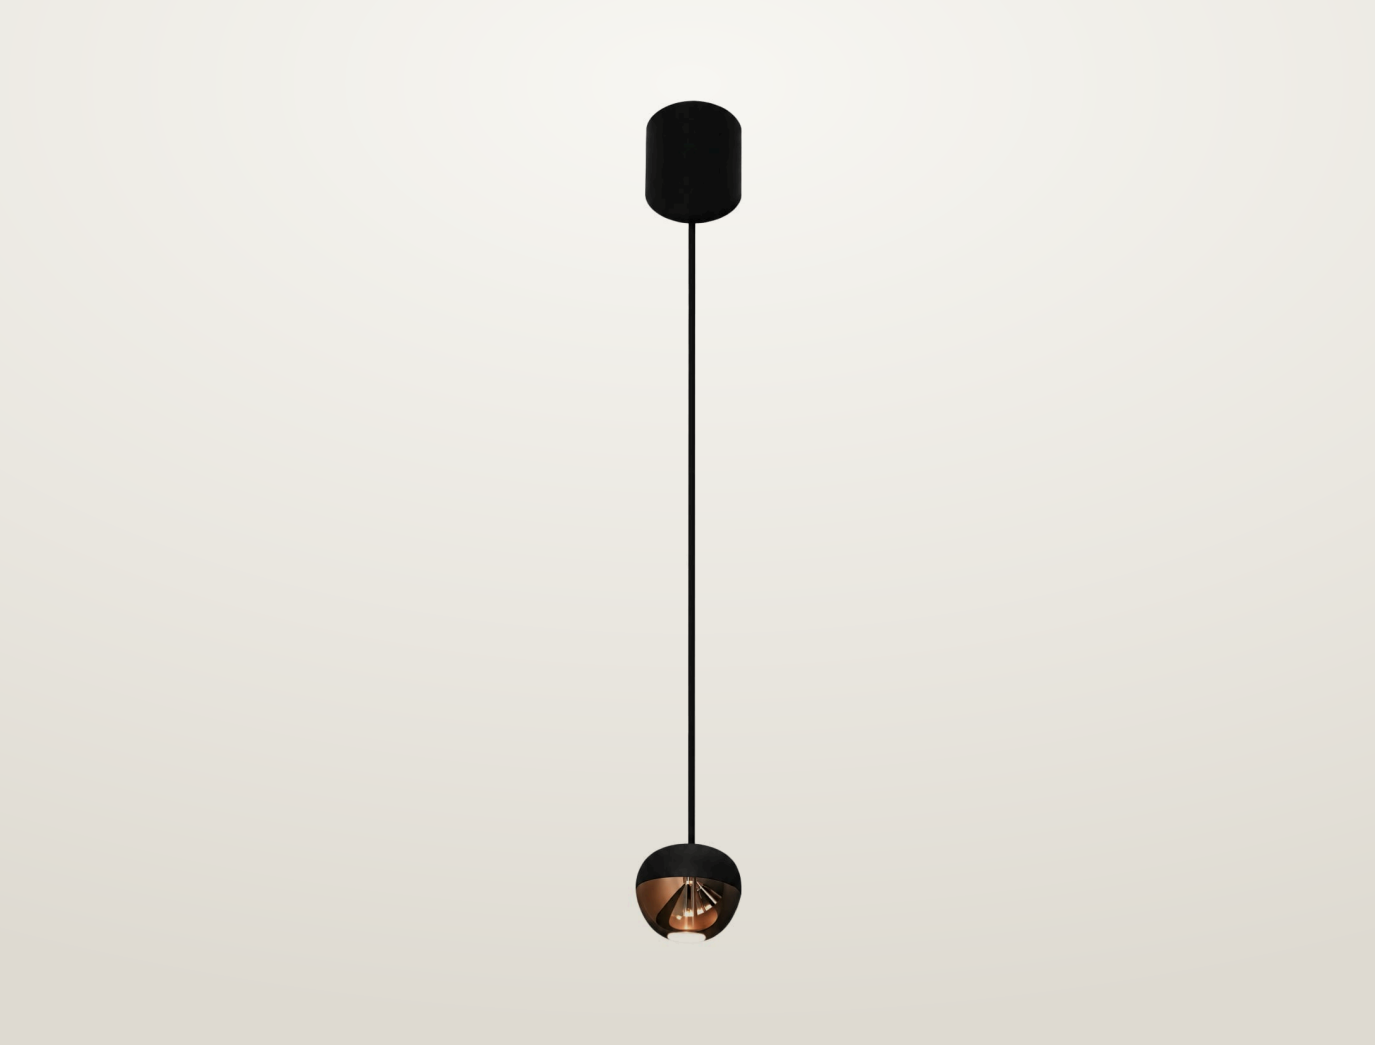


Pendant. 4 W. 35° or 50° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **4 W**	Voltage **230 V AC**	Luminous flux **300 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **35°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Suspended**
Finishes **Black**		

Dimensions

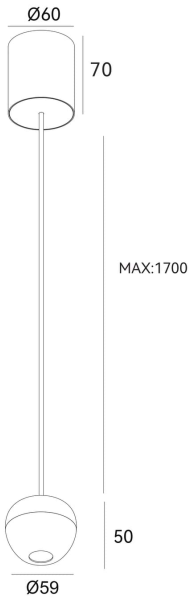


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
PH0018	4 W	230 V AC	300 lm	97 CRI	Ball Ø59 x H50 mm; canopy Ø60 × 70 mm; cable max 1700 mm	35° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0018, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


PH0018, 4 W, 35° beam

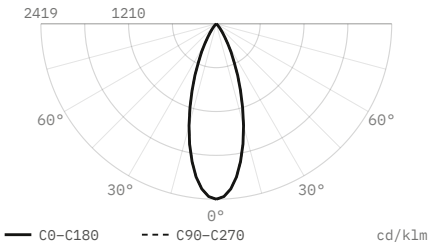


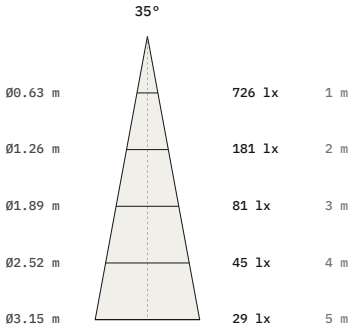

Luminous flux	300 lm
Efficacy	75 lm/W
Peak intensity	726 cd, 2,419 cd/klm
Beam angle (50%)	35°
Field angle (10%)	63.8°
Cut-off angle (2.5%)	40°
Flux 0–30° / 30–60° / 60–90°	87.6 / 12.4 / 0 %
Size	Ø59 × 50 mm
Data	Calculated from catalogue data

PH0018, 4 W, 50° beam

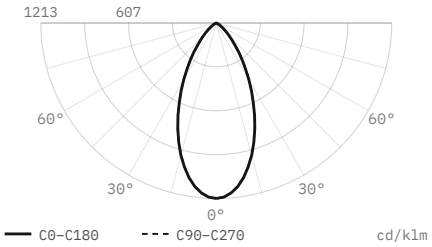

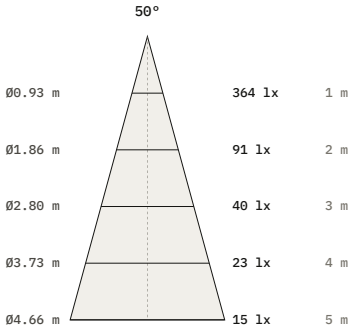

Luminous flux	300 lm
Efficacy	75 lm/W
Peak intensity	364 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø59 × 50 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.