Suspension

Zoom PH0028

Pendant





Pendant. 8 or 15 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.


- LED source: Citizen

Power **8 W, 15 W**	Voltage **230 V AC**	Luminous flux **730 lm, 1300 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Suspended**
Finishes **White**		

Dimensions

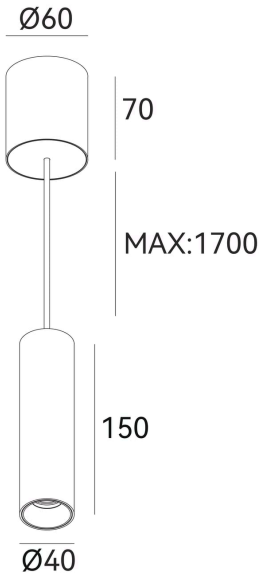

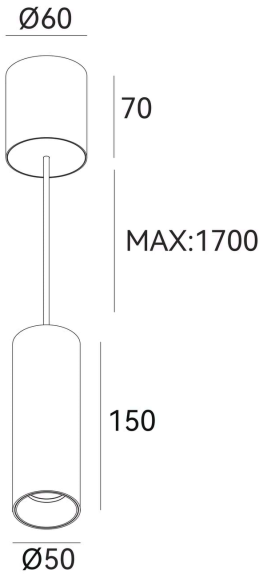

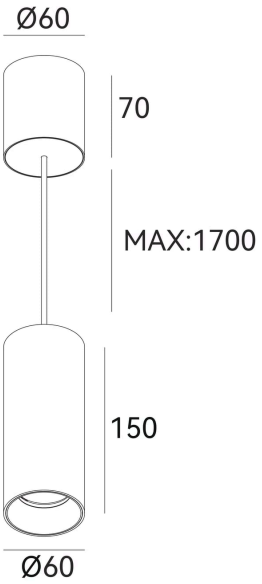


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
PH0028	8 W	230 V AC	730 lm	97 CRI	Body Ø40 x H150 mm; canopy Ø60 × 70 mm; cable max 1700 mm	15° 24° 36° 50°
PH0029	15 W	230 V AC	1300 lm	97 CRI	Body Ø50 x H150 mm; canopy Ø60 × 70 mm; cable max 1700 mm	15° 24° 36° 50°
PH0030	15 W	230 V AC	1300 lm	97 CRI	Body Ø60 x H150 mm; canopy Ø60 × 70 mm; cable max 1700 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0029, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


PH0029, 15 W, 15° beam

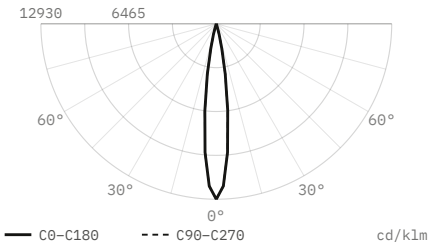


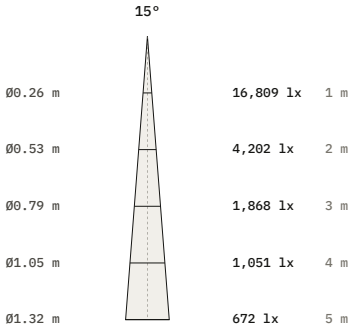

Luminous flux	1,300 lm
Efficacy	87 lm/W
Peak intensity	16,809 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø50 × 150 mm
Data	Calculated from catalogue data


PH0029, 15 W, 24° beam

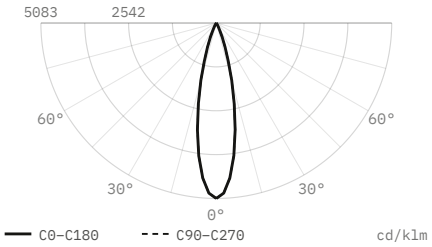


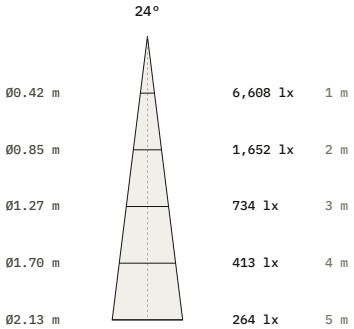

Luminous flux	1,300 lm
Efficacy	87 lm/W
Peak intensity	6,608 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø50 × 150 mm
Data	Calculated from catalogue data


PH0029, 15 W, 36° beam

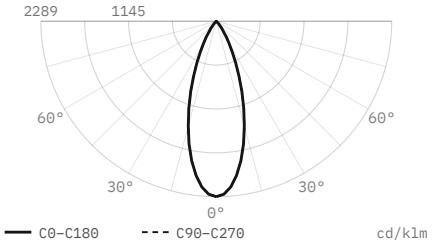


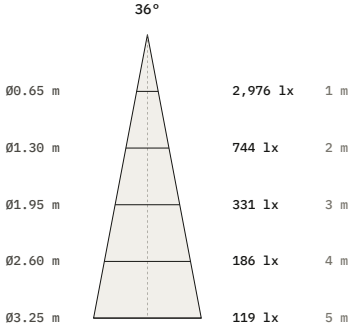

Luminous flux	1,300 lm
Efficacy	87 lm/W
Peak intensity	2,976 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø50 × 150 mm
Data	Calculated from catalogue data

PH0029, 15 W, 50° beam

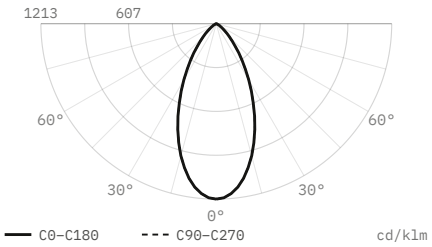

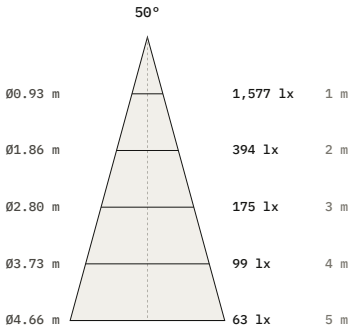

Luminous flux	1,300 lm
Efficacy	87 lm/W
Peak intensity	1,577 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø50 × 150 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.