Suspension

Zoom PH0040

Pendant





Pendant. 20 or 30 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **20 W, 30 W**	Voltage **230 V AC**	Luminous flux **1800 lm, 2900 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Suspended**
Finishes **White**		

Dimensions

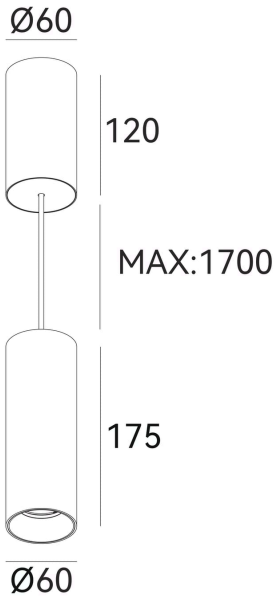

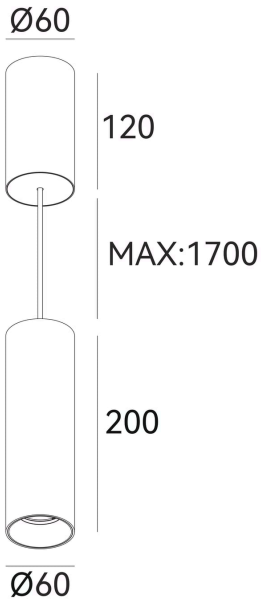


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
PH0040	20 W	230 V AC	1800 lm	97 CRI	Body Ø60 x H175 mm; canopy Ø60 × 120 mm; cable max 1700 mm	15° 24° 36° 50°
PH0041	30 W	230 V AC	2900 lm	97 CRI	Body Ø60 x H200 mm; canopy Ø60 × 120 mm; cable max 1700 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0041, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


PH0041, 30 W, 15° beam

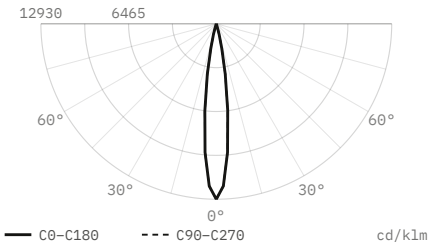


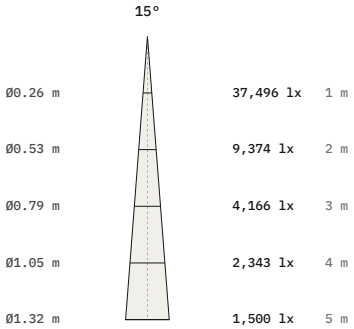

Luminous flux	2,900 lm
Efficacy	97 lm/W
Peak intensity	37,496 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data


PH0041, 30 W, 24° beam

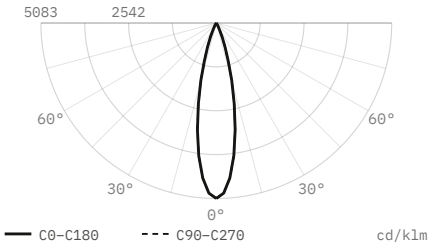


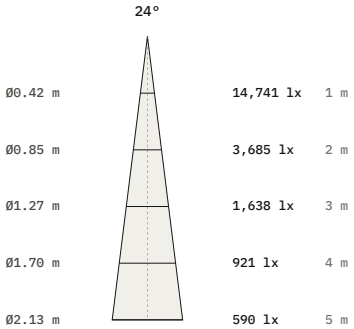

Luminous flux	2,900 lm
Efficacy	97 lm/W
Peak intensity	14,741 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data


PH0041, 30 W, 36° beam

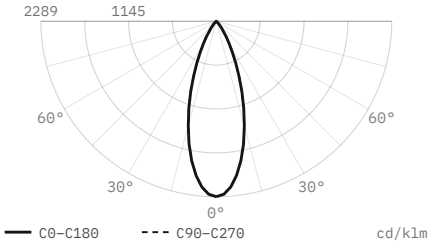


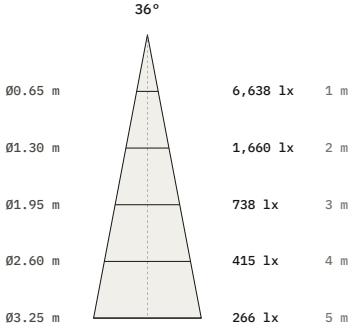

Luminous flux	2,900 lm
Efficacy	97 lm/W
Peak intensity	6,638 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

PH0041, 30 W, 50° beam

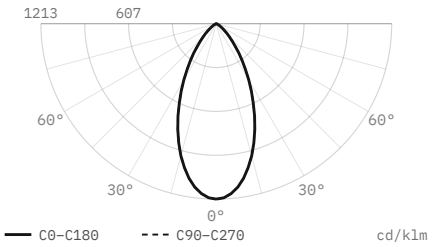

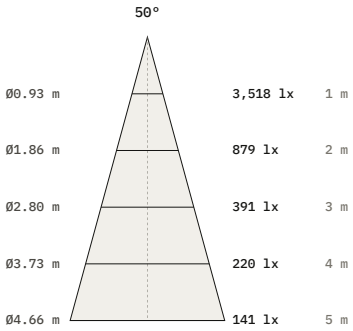

Luminous flux	2,900 lm
Efficacy	97 lm/W
Peak intensity	3,518 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø60 × 200 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.