
Suspension

Zoom PH0044

Pendant

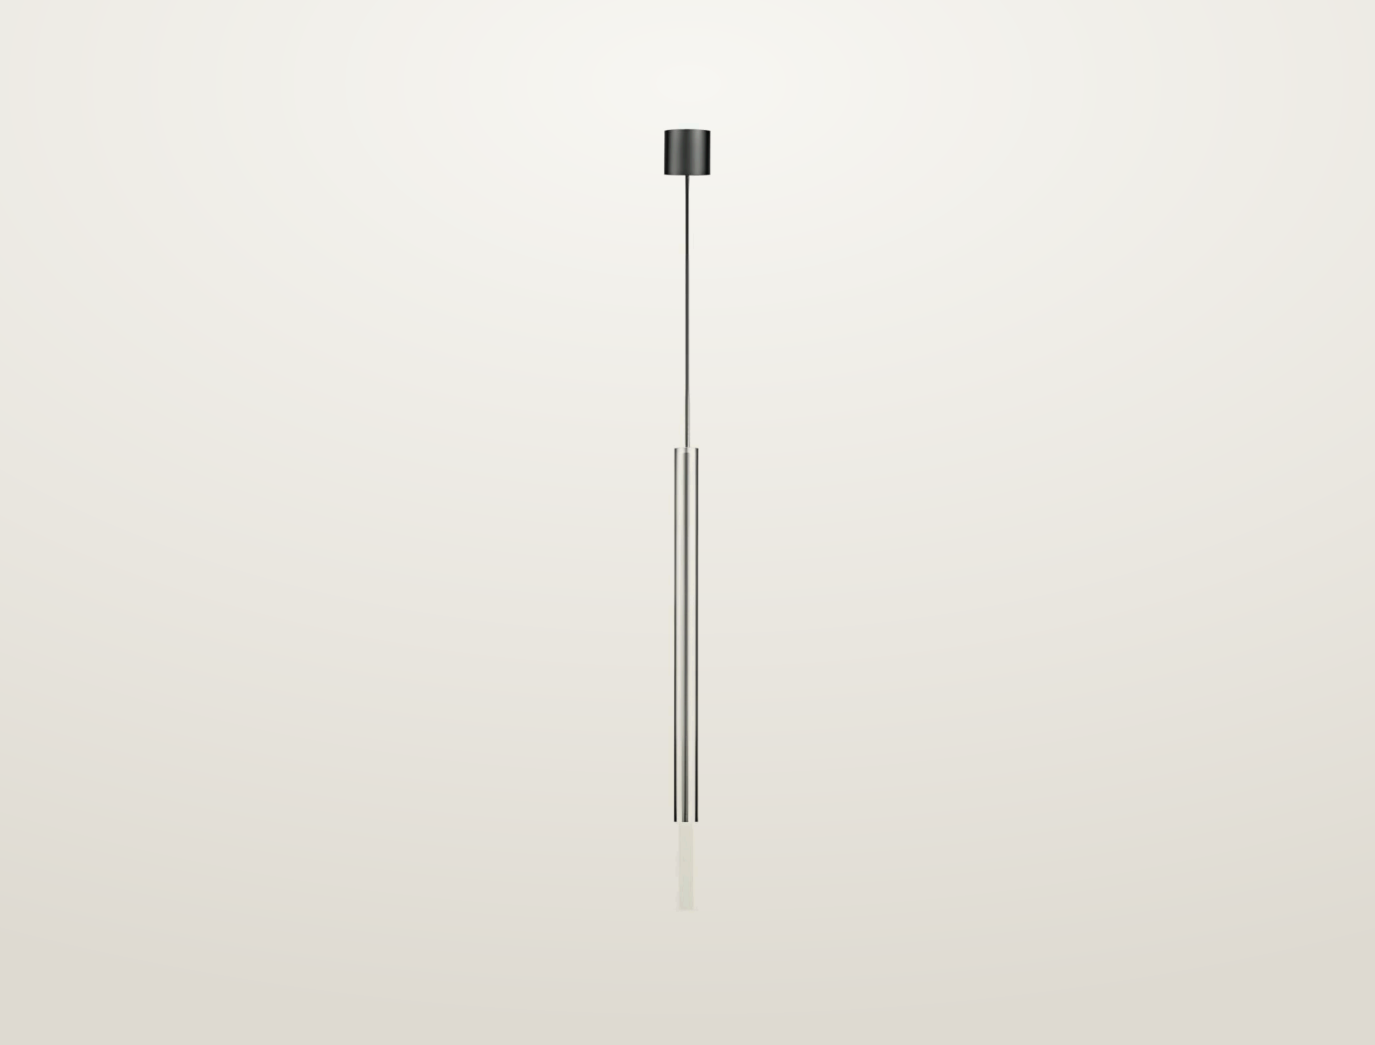

Pendant. 8 W. 35° or 50° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
8 W	230 V AC	730 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	35°, 50°
IP rating	**Certifications**	**Mounting**
IP20	CE	Suspended

Finishes

Black


Models


Code	Version	Power	Voltage	Flux	CRI	Size	Beam
PH0044	L 500 mm	8 W	230 V AC	730 lm	97 CRI	Ø26 x L500 mm (includes a 100 mm end section); canopy Ø65 × 100 mm; suspension 0–2000 mm	35° 50°
PH0025	L 600 mm	8 W	230 V AC	730 lm	97 CRI	Ø26 x L600 mm; canopy Ø65 × 100 mm; suspension 0–2000 mm	35° 50°
PH0046	L 700 mm	8 W	230 V AC	730 lm	97 CRI	Ø26 x L700 mm (includes a 100 mm end section); canopy Ø65 × 100 mm; suspension 0–2000 mm	35° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0044, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


PH0044, 8 W, 35° beam

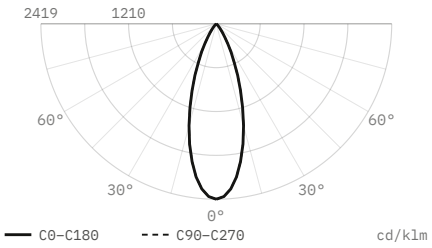


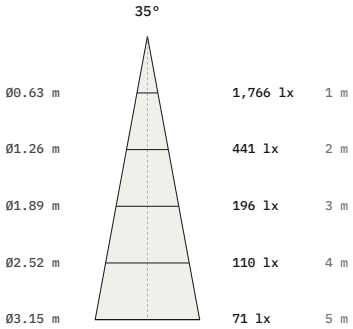

Luminous flux	730 lm
Efficacy	91 lm/W
Peak intensity	1,766 cd, 2,419 cd/klm
Beam angle (50%)	35°
Field angle (10%)	63.8°
Cut-off angle (2.5%)	40°
Flux 0–30° / 30–60° / 60–90°	87.6 / 12.4 / 0 %
Size	Ø26 × 500 mm
Data	Calculated from catalogue data

PH0044, 8 W, 50° beam

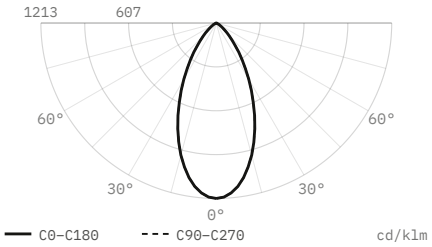

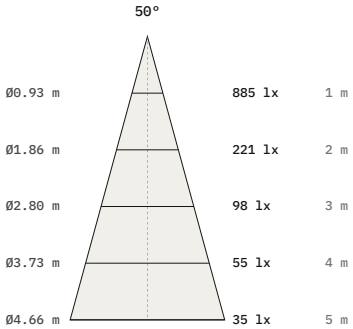

Luminous flux	730 lm
Efficacy	91 lm/W
Peak intensity	885 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø26 × 500 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.