Suspension

# Zoom PH0081

Pendant




Pendant. 9 or 11 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø76 mm
- LED source: Citizen

| | | |
|---|---|---|
| Power<br>**9 W, 11 W** | Voltage<br>**230 V AC, max 36 V** | Luminous flux<br>**720 lm** |
| Colour temperature<br>**2700 K, 3000 K, 4000 K** | CRI<br>**97 CRI** | IP rating<br>**IP20** |
| Certifications<br>**CE** | Mounting<br>**Recessed, Suspended** | Finishes<br>**Black** |

## Dimensions

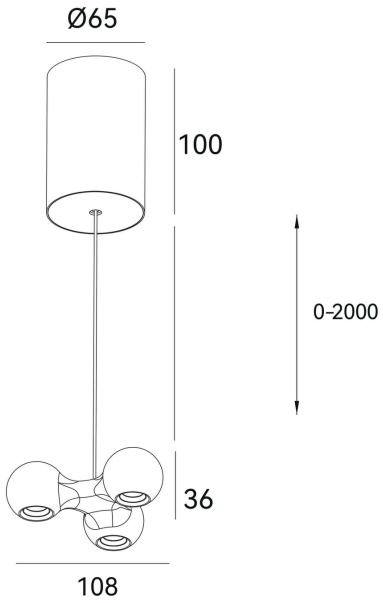



## Models


| Code | Power | Voltage | Flux | CRI | Size | Cut-out | Notes |
|---|---|---|---|---|---|---|---|
| **PH0081** | 11 W | 230 V AC | 720 lm | 97 CRI | Cluster 108 × 36 mm; canopy Ø65 × 100 mm; suspension 0–2000 mm | | |
| **PH0084** | 9 W | max 36 V | 720 lm | 97 CRI | Cluster 108 × 36 mm; suspension 0–2000 mm | Ø76 mm | 250 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0081, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## PH0081, 11 W, wide distribution

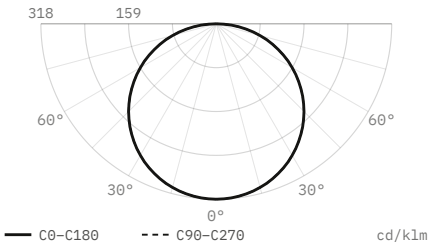

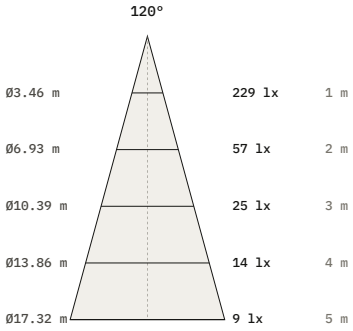
| | |
|---|---|
| Luminous flux | **720 lm** |
| Efficacy | **65 lm/W** |
| Peak intensity | **229 cd, 318 cd/klm** |
| Beam angle (50%) | **120°** |
| Field angle (10%) | **168.5°** |
| Cut-off angle (2.5%) | **88.5°** |
| Flux 0–30° / 30–60° / 60–90° | **25 / 50 / 25 %** |
| Size | **108 × 36 mm** |
| Data | **Calculated from catalogue data** |

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.