FLEXA
LIGHTING

HANS 2

Flush optic IP-rated downlight

CE 30mm IP67 made in Italy

design Roberto Mantovani



IP67 recessed fixtures of the highest quality construction with reduced installation depth. Body in anodized aluminium, front mask in AISI316L stainless steel or anodised aluminium and powder-coated. Toughened extra-clear glass, neoprene cord.

Incasso IP67 di altissima qualità costruttiva con ridotta profondità di incasso. Corpo in alluminio anodizzato a spessore, frontale in acciaio INOX AISI316L o in alluminio anodizzato e verniciato a polveri. Vetro extrachiaro temprato, cavo in neoprene.

Encastrable IP67 de très haute qualité constructive avec profondeur d'encastrement réduite. Corps en aluminium anodisé à épaisseur, frontal en acier INOX AISI316L ou en aluminium anodisé et peint en poudre. Verre extra-clair trempé, câble en néoprène.

IP67 Einbauleuchten von sehr hoher Bauqualität mit reduzierter Einbautiefe. Gehäuse aus dickem eloxiertem Aluminium, Front aus Edelstahl AISI316L oder pulverbeschichtetem eloxiertem Aluminium. Speziell klares Hartglas, Neoprenkabel.

Empotrable IP67 de muy alta calidad de fabricación con profundidad de empotrado reducida. Cuerpo de aluminio anodizado con espesor, con frente de acero INOX AISI316L o de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, cable de neoprene.

Supply current
500mA (V_f 2,9V)


Power
2W

Series wiring


CRI
85(2200K-4200K-6000K)
90 (2700K-3000K)

2-Step MacAdam

Dimensions



Photometric diagrams

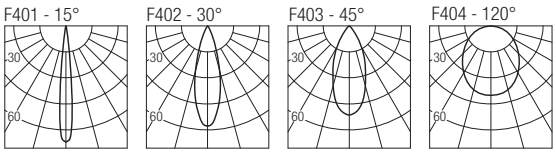

CCT/CRI/Flux

2200K	**160 lm**
2700K	**175 lm**
3000K	**181 lm**
4200K	**197 lm**
6000K	**211 lm**


Code construction

H2A X X X X

- X (4th): B White; G Grey; A Anthracite; N Black; K COR-TEN; Z INOX Steel AISI 316L
- X (3rd): 5 2200K; 0 2700K; 1 3000K; 2 4200K; 3 6000K; 6 Blue; 7 Green; 8 Red
- X (2nd): 1 15°; 2 30°; 3 45°; 9 120°
- X (1st): 1 Round; 2 Square

Accessories

CSLN01
Recessing box



LH2A01
Low luminance louver

HMH2A01
Halfmoon glare shield
(for round versions only)

Note
The filter and the half-moon glare shield must be ordered together with the lighting fixture.

Drivers 500mA

on/off
AL1074 (1..7) IP20 30 mm
AL1077 (1..6) IP20 40 mm
AL1084 (1..11) IP20 S.P. 55 mm
AL9051 (1..11) IP67 44 mm

dimmable
AL4010 (1..12) IP20 PUSH 0/1..10V 72 mm
ALMINI50 (1..8) IP20 DALI 2 PUSH 30 mm
AL4151 (1..14) IP20 DALI 2 PUSH 72 mm
AL4153 (1..14) IP20 PUSH IGBT-TRIAC 56 mm
AL6050 (2..6) IP67 DALI 2 44 mm
AL8050 (4..16) IP67 DALI 2 48 mm