FLEXA
LIGHTING

BRUTUS 10

IP-rated projector

IP65 made in Italy

design Roberto Mantovani



Compact projectors equipped with COB LED lights with high luminous performance. Made of anodised aluminium, they are suitable for installation in particularly aggressive environments. The optical quality and fine finishes merge into a product of great reliability and quality. Can be fitted with an anti-glare filter for maximum visual comfort.

Proiettori compatti equipaggiati con COB LED dalle alte prestazioni luminose. Realizzati in alluminio anodizzato, sono idonei all'installazione in ambienti particolarmente aggressivi. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità e qualità. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Projecteurs compacts équipés de LEDS COB haute performance. Réalisés en aluminium anodisé, indiqués pour installations en milieux particulièrement agressifs. La qualité optique et la finesse des finitions se combinent pour donner un produit très fiable. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

Kompakte Projektoren, die mit leistungsstarken COB-LEDs ausgestattet sind. Aus eloxiertem Aluminium gefertigt, sind sie für die Installation in besonders aggressiven Umgebungen geeignet. Optische Qualität und feine Verarbeitung vereinen sich zu einem Produkt von großer Zuverlässigkeit und Qualität. Kann mit Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Proyectores compactos equipados con COB LED de alto rendimiento luminoso. Realizados en aluminio anodizado, son adecuados para la instalación en ambientes especialmente agresivos. La calidad óptica y los acabados finos se combinan en un producto de gran fiabilidad y calidad. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.

Supply current
500mA (V_f 18V)


Power
10W

Series wiring


CRI
85 (2200K)
93 (2700K-3000K-4000K)

2-Step MacAdam

Dimensions



Photometric diagrams

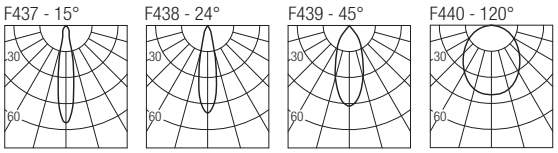

CCT/CRI/Flux

2200K	**810 lm**
2700K	**840 lm**
3000K	**930 lm**
4000K	**960 lm**

Code construction


BRT1 X X X

- X: **S** 15° | **M** 24° | **F** 45° | **W** 120°
- X: **18** 2200K | **29** 2700K | **39** 3000K | **49** 4000K
- X: **2** Aluminium (anodized) | **5** Black (anodized) | **6** Bronze (anodized)

Note
Made-to-measure cable available on request.

Accessories

ESBRT101
Earth spike



XP3200 Aluminium
XP3500 Black
XP3600 Bronze
Base



LBRT101
Low luminance louver



Note
The filter must be ordered together with the lighting fixture.

XXT01
Tree strap



XNTB102 Aluminium
XNTB105 Black
XNTB106 Bronze
Antiglare snoot



Drivers 500mA

on/off
AL1074 (1) IP20 30 mm
AL1077 (1) IP20 40 mm
AL1084 (1..2) IP20 S.P. 55 mm
AL9051 (1..2) IP67 44 mm

dimmable
AL4010 (1..2) IP20 PUSH 0/1..10V 72 mm
ALMINI50 (1) IP20 DALI 2 PUSH 30 mm
AL4151 (1..2) IP20 DALI 2 PUSH 72 mm
AL4153 (1..2) IP20 PUSH IGBT-TRIAC 56 mm
AL6050 (1) IP67 DALI 2 44 mm
AL8050 (1..2) IP67 DALI 2 48 mm