FLEXA
LIGHTING

BULL 10 BASE

Surface projector

IP20 made in Italy

design Lapo Grassellini



The Bull Base range features projectors for wall or ceiling installation, where a minimalist and sophisticated design is combined with an innovative heat dissipation concept, ensuring a remarkably lightweight luminaire together with excellent thermal management. The use of high-quality COB LEDs is paired with highly efficient, clean optics.

La gamma Bull Base propone proiettori per installazione a parete o soffitto nei quali il design minimale e sofisticato si sposa ad un concetto di dissipazione innovativo, tale da garantire una notevole leggerezza dell'apparecchio combinata ad una eccellente gestione dei flussi termici. L'impiego di LED COB di altissima qualità si combina ad ottiche estremamente efficienti e pulite.

La gamme Bull Base propose des projecteurs pour installation murale ou au plafond, dans lesquels un design minimaliste et sophistiqué s'associe à un concept innovant de dissipation thermique, garantissant une remarquable légèreté de l'appareil ainsi qu'une excellente gestion des flux thermiques. L'utilisation de LED COB de très haute qualité s'associe à des optiques extrêmement efficaces et nettes.

Die Serie Bull Base umfasst Strahler für die Wand- oder Deckenmontage, bei denen minimalistisches und anspruchsvolles Design mit einem innovativen Konzept zur Wärmeableitung kombiniert wird. Dadurch wird ein besonders geringes Gewicht der Leuchte bei gleichzeitig hervorragendem Wärmemanagement gewährleistet. Der Einsatz hochwertiger COB-LEDs wird mit äußerst effizienten und sauberen Optiken kombiniert.

La gama Bull Base propone proyectores para instalación en pared o techo, en los que un diseño minimalista y sofisticado se combina con un innovador concepto de disipación térmica, garantizando una notable ligereza de la luminaria junto con una excelente gestión térmica. El uso de LED COB de altísima calidad se combina con ópticas extremadamente eficientes y limpias.


Supply current
230VAC

Power
10W


CRI
85 (2200K)
93 (2700K-3000K-4000K)

2-Step MacAdam

Dimensions



Photometric diagrams

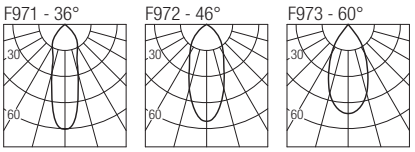

CCT/CRI/Flux

2200K	**810 lm**
2700K	**840 lm**
3000K	**930 lm**
4000K	**960 lm**

Code construction

BB1 X X X

	S	**M**	**W**
	36°	46°	60°
18	**29**	**39**	**49**
2200K	2700K	3000K	4000K
11	**22**	**55**	
White	Grey	Black	

Note
Dimmable version available on request.

Accessories

BUX1NA
Low luminance louver



SBB101
Milky screen



Note
The screen must be ordered together with the lighting fixture.

BUX1FL
Adjustable barn door flaps

