
FLEXA
LIGHTING

CYL 10

Ceiling mounted luminaire

IP20 made in Italy

design Roberto Mantovani



The Cyl range of surface-mounted luminaires combines minimalist geometry with high mechanical and optical quality. The recessed optic helps reduce glare, ensuring a high level of visual comfort and precise, controlled light output.

La gamma di apparecchi a plafone Cyl combina una geometria minimale con un'elevata qualità meccanica e ottica. L'ottica arretrata contribuisce a ridurre l'abbagliamento, garantendo un elevato comfort visivo e un'emissione luminosa precisa e controllata.

La gamme de luminaires en saillie Cyl associe une géométrie minimaliste à une grande qualité mécanique et optique. L'optique en retrait contribue à réduire l'éblouissement, garantissant un confort visuel élevé ainsi qu'une émission lumineuse précise et maîtrisée.

Die Serie Cyl umfasst Aufbauleuchten, die eine minimalistische Geometrie mit hoher mechanischer und optischer Qualität verbinden. Die zurückversetzte Optik trägt zur Reduzierung der Blendung bei und gewährleistet hohen visuellen Komfort sowie eine präzise und kontrollierte Lichtemission.

La gama de luminarias de superficie Cyl combina una geometría minimalista con una elevada calidad mecánica y óptica. La óptica retranqueada contribuye a reducir el deslumbramiento, garantizando un elevado confort visual y una emisión luminosa precisa y controlada.

Supply current
500mA (V_f 18V)


Power
10W

Series wiring


CRI
85 (2200K)
93 (2700K-3000K-4000K)

2-Step MacAdam

Dimensions



Photometric diagrams

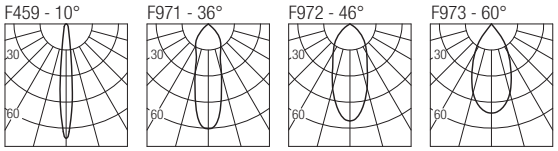

CCT/CRI/Flux

2200K	**810 lm**
2700K	**840 lm**
3000K	**930 lm**
4000K	**960 lm**

Code construction

CYL X X X

N	**S**	**M**	**W**
10°	36°	46°	60°

18	**29**	**39**	**49**
2200K	2700K	3000K	4000K

1	**2**	**5**	**6**
White	Grey	Black	Bronze

Accessories

LCYL01 White
LCYL01B Black
Low luminance louver

SCYL01 White
SCYL01B Black
Milky screen

Note
The filter and screen are not compatible with the 10° lens version.

Drivers 500mA

on/off
AL1074 (1) IP20 30 mm
AL1077 (1) IP20 40 mm
AL1084 (1..2) IP20 S.P. 55 mm

dimmable
AL4010 (1..2) IP20 PUSH 0/1..10V 72 mm
ALMINI50 (1) IP20 DALI 2 PUSH 30 mm
AL4151 (1..2) IP20 DALI 2 PUSH 72 mm
AL4153 (1..2) IP20 PUSH IGBT-TRIAC 56 mm