FLEXA
LIGHTING

ELF DTW

Dim to Warm ceiling mounted

IP65 made in Italy

design Roberto Mantovani



Dim to Warm surface-mounted luminaires combine minimalist geometry with high mechanical and optical quality. With remarkable ease of installation, they lend themselves to applications ranging from accent lighting of display elements or architectural details to general lighting.

Apparecchi a plafone Dim to Warm che combinano una geometria minimale ad una qualità meccanica ed ottica di alto livello. Con una notevole semplicità di installazione, si prestano ad applicazioni che vanno dall'illuminazione d'accento di elementi espositivi o di dettagli architettonici all'illuminazione generale.

Les luminaires en saillie Dim to Warm associent une géométrie minimaliste à une qualité mécanique et optique élevée. D'une facilité d'installation remarquable, ils se prêtent à des applications allant de l'éclairage d'accentuation d'éléments de présentation ou de détails architecturaux à l'éclairage général.

Dim to Warm-Anbauleuchten kombinieren eine minimalistische Geometrie mit hoher mechanischer und optischer Qualität. Mit ihrer bemerkenswert einfachen Installation eignen sie sich für Anwendungen, die von der Akzentbeleuchtung von Ausstellungselementen oder architektonischen Details bis zur Allgemeinbeleuchtung reichen.

Las luminarias de superficie Dim to Warm combinan una geometría minimalista con una gran calidad mecánica y óptica. Con una notable facilidad de instalación, se prestan a aplicaciones que van desde la iluminación de acento de elementos de exposición o detalles arquitectónicos hasta la iluminación general.

Supply current
400mA (V_f 18V)


Power
8W

Series wiring


CRI
95

DTW 3000K to 1800K

Dimensions



Photometric diagrams

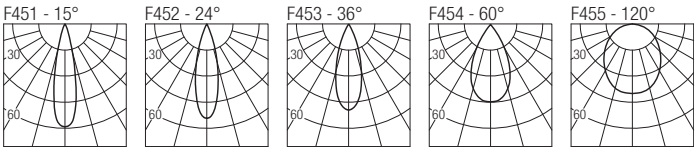

CCT/CRI/Flux

3000K	1800K
870 lm	**16 lm**

Code construction

DTWEF1 X X

N	S	M	W	X
15°	24°	36°	60°	120°

1	2	3	5	7	9
White	Grey	Anthracite	Black	Olive green	COR-TEN

Note
Made-to-measure cable available on request.

Accessories

LDEF101
Low luminance louver

Note
The filter must be ordered together with the lighting fixture.

Drivers 400mA
dimmable
AL4451DS (1..2) IP20 DALI 2 ⌀50 mm
AL8040 (1..2) IP67 DALI 2 ⌀48 mm