FLEXA
LIGHTING

FLEXUS DTW

Dim to Warm flush optich downlight

CE 55mm IP44 made in Italy

design Rod&Todd



A small and shallow Dim to Warm downlight with a minimalist design and high optical performance. Thanks to the use of advanced optics, it provides narrow and precise light beams. Can be fitted with an anti-glare filter for maximum visual comfort.

Incasso Dim to Warm dalle dimensioni estremamente compatte e dal design minimale, caratterizzato dalla capacità di unire elevati flussi luminosi ad ottiche precise e pulite, in grado di offrire aperture di fascio strette per illuminazioni che spaziano dall'accento all'illuminazione generale. Equipaggiabile con l'accessorio filtro antiabbagliamento, per assicurare il miglior comfort visivo dell'installazione.

Encastrable à plafond Dim to Warm petit et peu profond caractérisé par un design minimal et des performances optiques élevées. Grâce à l'utilisation d'optiques avancées, il offre des faisceaux lumineux étroits et précis. Peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Ein kleines und flaches Dim to Warm Einbau-Deckenleuchte, das sich durch ein minimalistisches Design und hohe optische Leistung auszeichnet. Dank der Verwendung einer hochentwickelten Optik bietet sie enge und präzise Lichtkegel. Sie kann mit einem Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Luminaria empotrable Dim to Warm de dimensiones extremadamente compactas y diseño minimalista, caracterizada por la capacidad de combinar elevados flujos luminosos con ópticas precisas y limpias, capaces de ofrecer ángulos de haz estrechos para iluminaciones que van desde el acento a la iluminación general. Puede equiparse con un accesorio de filtro antideslumbrante para garantizar el mejor confort visual de la instalación.

Supply current
400mA (V_f 18V)


Power
8W

Series wiring


CRI
95

DTW 3000K to 1800K

Dimensions



Photometric diagrams

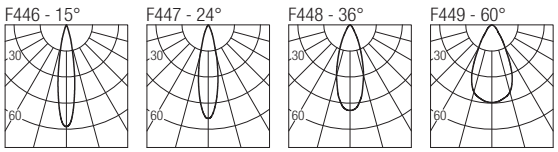

CCT/CRI/Flux

3000K	1800K
870 lm	**16 lm**


Code construction

DTWFX1 X X X

- 3rd X: **N** 15° | **S** 24° | **M** 36° | **W** 60°
- 2nd X: **1** White | **2** Grey | **5** Black | **6** Bronze
- 1st X: **1** Round | **2** Square

Accessories

CSFX01
Recessing box



LDFX101
Low luminance louver

SDFX101
Milky screen

Note
The filter and the screen must be ordered together with the lighting fixture.

Drivers 400mA
dimmable
AL4451DS (1..2) IP20 DALI 2 50 mm