FLEXA
LIGHTING

FRONK

Uplight

INOX IK10 IK09 IP67 made in Italy

design Roberto Mantovani



IP67 ground recessed fixtures of the highest quality construction with reduced installation depth. Body in anodized aluminium, front mask in AISI316L stainless steel or anodised aluminium and powder-coated. Toughened extra-clear glass, neoprene cord.

Incasso a terra IP67 di altissima qualità costruttiva con ridotta profondità di incasso. Corpo in alluminio anodizzato a spessore, frontale in acciaio INOX AISI316L o in alluminio anodizzato e verniciato a polveri. Vetro extrachiaro temprato, cavo in neoprene.

Encastrable au sol IP67 de très haute qualité constructive avec profondeur d'encastrement réduite. Corps en aluminium anodisé à épaisseur, frontal en acier INOX AISI316L ou en aluminium anodisé et peint en poudre. Verre extra-clair trempé, câble en néoprène.

Bodeneinbauleuchten IP67 von sehr hoher Bauqualität mit reduzierter Einbautiefe. Gehäuse aus dickem eloxiertem Aluminium, Front aus Edelstahl AISI316L oder pulverbeschichtetem eloxiertem Aluminium. Speziell klares Hartglas, Neoprenkabel.

Empotrado en el suelo IP67 de muy alta calidad de fabricación con profundidad de empotrado reducida. Cuerpo de aluminio anodizado con espesor, con frente de acero INOX AISI316L o de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, cable de neoprene.

Supply current
24VDC


Power
2W

Parallel wiring


CRI
85

2-Step MacAdam

Dimensions



Photometric diagrams

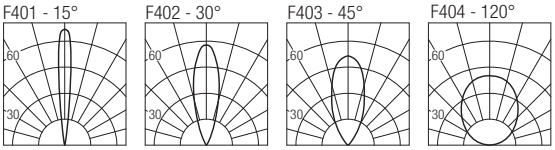

CCT/CRI/Flux

2700K	**128 lm**
3000K	**133 lm**
4000K	**154 lm**

Code construction


FNK X X X X

- X: 1 Round, 2 Square
- X: 1 (15°), 2 (30°), 3 (45°), 9 (120°)
- X: 0 (2700K), 1 (3000K), 2 (4000K)
- X: G Grey, A Anthracite, N Black, V Olive green, K COR-TEN, Z INOX Steel AISI 316L

Note
Made-to-measure cable available on request.

Accessories

CSLN01
Recessing box



LFNK01
Low luminance louver

HMFNK01
Halfmoon glare shield
(for round versions only)

Note
The filter and the half-moon glare shield must be ordered together with the lighting fixture.

Drivers 24VDC

on/off

AL2124 (1..5) IP20 28 mm
AL2012 (1..12) IP20 60 mm
AL2031 (1..35) IP20 70 mm
AL9222 (1..18) IP67 44 mm
AL9231 (1..35) IP67 85 mm

dimmable

AL5012 (1..12) IP20 DALI 2 PUSH 0/1..10V 45 mm
AL8012 (1..12) IP67 DALI 2 48 mm

dimming module

AL7035 IP20 DALI 2 PUSH 0/1..10V 44 mm

Note
Dimming module AL7035 to be used in combination with a 24VDC on/off power supply