
FLEXA
LIGHTING

HANS

Flush optic IP-rated downlight

30mm IP67 made in Italy

design Roberto Mantovani



IP67 recessed fixtures of the highest quality construction with reduced installation depth. Body in anodized aluminium, front mask in AISI316L stainless steel or anodised aluminium and powder-coated. Toughened extra-clear glass, neoprene cord.

Incasso IP67 di altissima qualità costruttiva con ridotta profondità di incasso. Corpo in alluminio anodizzato a spessore, frontale in acciaio INOX AISI316L o in alluminio anodizzato e verniciato a polveri. Vetro extrachiaro temprato, cavo in neoprene.

Encastrable IP67 de très haute qualité constructive avec profondeur d'encastrement réduite. Corps en aluminium anodisé à épaisseur, frontal en acier INOX AISI316L ou en aluminium anodisé et peint en poudre. Verre extra-clair trempé, câble en néoprène.

IP67 Einbauleuchten von sehr hoher Bauqualität mit reduzierter Einbautiefe. Gehäuse aus dickem eloxiertem Aluminium, Front aus Edelstahl AISI316L oder pulverbeschichtetem eloxiertem Aluminium. Speziell klares Hartglas, Neoprenkabel.

Empotrable IP67 de muy alta calidad de fabricación con profundidad de empotrado reducida. Cuerpo de aluminio anodizado con espesor, con frente de acero INOX AISI316L o de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, cable de neoprene.

Supply current
350mA (V_f 2,9V)


Power
1W

Series wiring


CRI
85(2200K-4200K-6000K)
90 (2700K-3000K)

2-Step MacAdam

Dimensions



Photometric diagrams

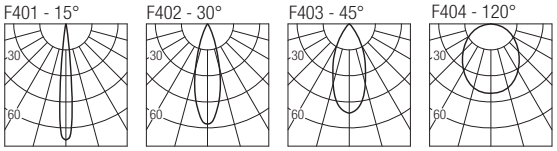

CCT/CRI/Flux

2200K	**92 lm**
2700K	**101 lm**
3000K	**109 lm**
4200K	**116 lm**
6000K	**132 lm**

Code construction

HA X X X X


B	G	A	N	K	Z		
White	Grey	Anthracite	Black	COR-TEN	INOX Steel AISI 316L		
5	0	1	2	3	6	7	8
2200K	2700K	3000K	4200K	6000K	Blue	Green	Red

1	2	3	9
15°	30°	45°	120°

1	2
Round	Square

Accessories

CSLN01
Recessing box



LHA01
Low luminance louver

HMHA01
Halfmoon glare shield
(for round versions only)

Note
The filter and the half-moon glare shield must be ordered together with the lighting fixture.

Drivers 350mA

on/off
AL1034 (1..11) IP20 30 mm
AL1035 (1..11) IP20 40 mm
AL1037 (1..16) IP20 S.P. 55 mm
AL9011 (1..12) IP67 44 mm

dimmable
AL4000 (1..12) IP20 PUSH 0/1..10V 72 mm
ALMINI35 (1..12) IP20 DALI 2 PUSH 30 mm
AL4051 (1..14) IP20 DALI 2 PUSH 72 mm
AL4053 (1..14) IP20 PUSH IGBT-TRIAC 56 mm
AL6035 (2..8) IP67 DALI 2 44 mm
AL8035 (4..16) IP67 DALI 2 48 mm