FLEXA
LIGHTING

JOS S DTW

Dim to Warm surface downlight

IP20 made in Italy

design Roberto Mantovani



A Dim to Warm projector for wall or ceiling installation, it is characterised by a minimal design and high optical performance. It lends itself to applications ranging from accent lighting to general illumination.

Proiettore Dim to Warm per installazione a parete o a soffitto connotato da un design minimale ed elevate prestazioni ottiche. Si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale.

Projecteur Dim to Warm pour installation murale ou sur plafond, caractérisé par un design minimaliste et de hautes performances optiques. Il est indiqué pour les applications allant de l'éclairage d'accentuation à l'éclairage général.

Dim to Warm Projektor für Wand- oder Deckenmontage, der sich durch ein minimalistisches Design und eine hohe optische Leistung auszeichnet. Sie ist eignet sich für Anwendungen, die von der Akzentbeleuchtung bis zur Allgemeinbeleuchtung.

Proyector Dim to Warm para instalación en pared o techo caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones que van desde la iluminación de acento hasta la iluminación general.

Supply current
400mA (V_f 18V)


Power
8W

Series wiring


CRI
95

DTW 3000K to 1800K

Dimensions

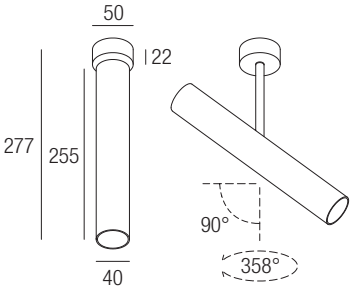

Photometric diagrams

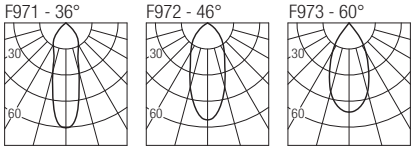

CCT/CRI/Flux

3000K	1800K
870 lm	**16 lm**

Code construction

DTWJSS1 X X

- 1st X: **S** 36° | **M** 46° | **W** 60°
- 2nd X: **1** White | **5** Black

Note
Versions with extended arm length are available upon request.

Accessories

LJ01 White
LJ01B Black
Low luminance louver

SJ01 White
SJ01B Black
Milky screen

Drivers 400mA
dimmable
AL4451DS (1..2) IP20 DALI 2 50 mm