FLEXA
LIGHTING

KELLER S

Wall mounted luminaire

IP65 made in Italy

design Roberto Mantovani



The Keller range of wall-mounted fixtures, equipped with 24VDC COB LEDs with high luminous performances, combines minimal geometry with a high level of mechanical and optical quality. Made of anodised aluminium, they are suitable for installation in particularly aggressive environments.

La gamma di apparecchi a parete Keller, equipaggiati con COB LED alimentati a 24VDC dalle alte prestazioni luminose, combina una geometria minimale ad una qualità meccanica ed ottica di alto livello. Realizzati in alluminio anodizzato, sono idonei all'installazione in ambienti particolarmente aggressivi.

La gamme d'appareils muraux Keller, équipés avec COB LEB alimentés à 24VDC aux prestations lumineuses élevées, combine une géométrie minimaliste à une qualité mécanique et optique de haut niveau. Réalisés en aluminium anodisé, ils sont adaptés pour l'installation dans des milieux particulièrement agressifs.

Die Geräte des Sortiments Keller sind mit 24VDC COB-LEDs mit hoher Lichtleistung ausgestattet und eine minimale Geometrie ist mit guter mechanischer und optischer Qualität kombiniert. Hergestellt aus eloxiertem Aluminium, eignen sie sich für den Einbau in besonders aggressiven Umgebungen.

La gama de aparatos de pared Keller, equipados con COB LED alimentados con 24VDC de altos rendimientos luminosos, combina una geometría minimalista con una alta calidad mecánica y óptica. Realizados en aluminio anodizado, son adecuados para la instalación en ambientes especialmente agresivos.

Supply current
24VDC


Power
7W

Parallel wiring


CRI
85 (2200K)
93 (2700K-3000K-4000K)

2-Step MacAdam

Dimensions



Photometric diagrams

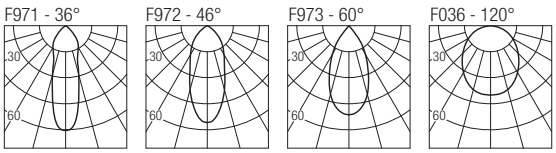

CCT/CRI/Flux

2200K	**570 lm**
2700K	**590 lm**
3000K	**650 lm**
4000K	**670 lm**

Code construction

KE1 X X X

- X: **S** 36° | **M** 46° | **W** 60° | **X** 120°
- X: **18** 2200K | **29** 2700K | **39** 3000K | **49** 4000K
- X: **2** Aluminium (anodized) | **5** Black (anodized) | **6** Bronze (anodized)

Note
Made-to-measure cable available on request.

Accessories

LKE101
Low luminance louver

Note
The filter must be ordered together with the lighting fixture.

Drivers 24VDC

on/off

AL2124 (1) IP20 28 mm
AL2012 (1..3) IP20 60 mm
AL2031 (1..10) IP20 70 mm
AL2040 (1..21) IP20 80 mm
AL9222 (1..5) IP67 44 mm
AL9231 (1..10) IP67 85 mm
AL9240 (1..21) IP67 85 mm

dimmable

AL5012 (1..3) IP20 DALI 2 PUSH 0/1..10V 45 mm
AL5241 (3..14) IP20 DALI 2 PUSH 70 mm
AL8012 (1..3) IP67 DALI 2 48 mm

dimming module

AL7035 IP20 DALI 2 PUSH 0/1..10V 44 mm

Note
Dimming module AL7035 to be used in combination with a 24VDC on/off power supply.