
FLEXA
LIGHTING

LAD R DTW

Dim to Warm semi-recessed downlight

CE 40mm IP20 made in Italy

design Roberto Mantovani



A Dim to Warm projector for semi-recessed wall or ceiling installations, it is characterised by a minimal design and high optical performance. It lends itself to applications ranging from accent lighting to general illumination.

Proiettore Dim to Warm per installazione a semi-incasso a parete o a soffitto connotato da un design minimale ed elevate prestazioni ottiche. Si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale.

Projecteur Dim to Warm pour installation semi-encastrée sur mur ou sur plafond, caractérisé par un design minimaliste et de hautes performances optiques. Il est indiqué pour les applications allant de l'éclairage d'accentuation à l'éclairage général.

Dim to Warm Projektor für halbversenkte Wand- oder Deckenmontage mit minimalistischem Design und hoher optischer Leistung. Eignet sich für Anwendungen, die von der Akzentbeleuchtung bis zur Allgemeinbeleuchtung reichen.

Proyector Dim to Warm para instalación semi-empotrado en pared o techo caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones que van desde la iluminación de acento hasta la iluminación general.

Supply current
400mA (V_f 18V)


Power
8W

Series wiring


CRI
95

DTW 3000K to 1800K

Dimensions

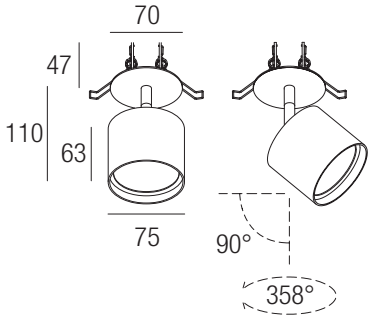

Photometric diagrams

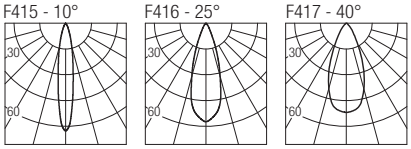

CCT/CRI/Flux

3000K	1800K
870 lm	**16 lm**

Code construction

DTWLADR1 X X

1st X			2nd X		
1		**5**	**N**	**S**	**M**
White		Black	10°	25°	40°

Note
Versions with extended arm length are available upon request.

Accessories

LL01 White
LL01B Black
Low luminance louver



SL01 White
SL01B Black
Milky screen



Drivers 400mA

dimmable
AL4451DS (1..2) IP20 DALI 2 50 mm