FLEXA
LIGHTING

LAD S DTW

Dim to Warm surface projector

IP20 made in Italy

design Roberto Mantovani



A Dim to Warm projector for wall or ceiling installation, it is characterised by a minimal design and high optical performance. It lends itself to applications ranging from accent lighting to general illumination. Thanks to the use of highly-advanced optics, it offers narrow and precise light beams.

Proiettore Dim to Warm per installazione a parete o a soffitto connotato da un design minimale ed elevate prestazioni ottiche. Si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale. Grazie all'utilizzo di ottiche estremamente evolute permette fasci luminosi stretti e precisi.

Projecteur Dim to Warm pour installation murale ou sur plafond, caractérisé par un design minimaliste et de hautes performances optiques. Il est indiqué pour les applications allant de l'éclairage d'accentuation à l'éclairage général. L'utilisation d'optique extrêmement évoluées permet d'obtenir des faisceaux étroits et précis.

Dim to Warm Projektor für Wand- oder Deckenmontage, der sich durch ein minimalistisches Design und eine hohe optische Leistung auszeichnet. Sie ist eignet sich für Anwendungen, die von der Akzentbeleuchtung bis zur Allgemeinbeleuchtung reichen. Dank der Verwendung extrem fortschrittlicher Optiken ermöglicht es schmale und präzise Lichtstrahlen.

Proyector Dim to Warm para instalación en pared o techo caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones que van desde la iluminación de acento hasta la iluminación general. Gracias a la utilización de ópticas extremadamente avanzadas permite haces de luz estrechos y precisos.

Supply current
400mA (V_f 18V)


Power
8W

Series wiring


CRI
95

DTW 3000K to 1800K


Dimensions



Photometric diagrams

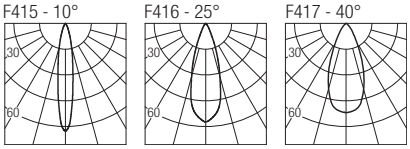

CCT/CRI/Flux



Code construction

DTWLADS1 X X

1st X			2nd X	
			N	10°
			S	25°
			M	40°
1	White			
5	Black			

Note
Versions with extended arm length are available upon request.

Accessories

LL01 White
LL01B Black
Low luminance louver



SL01 White
SL01B Black
Milky screen



Drivers 400mA

dimmable
AL4451DS (1..2) IP20 DALI 2 ⌀50 mm