FLEXA
LIGHTING

LOLLO 20

Adjustable downlight

115x115mm IP20 made in Italy

design Lapo Grassellini



The Lollo range of orientable, recessed fixtures offers high performance in extremely compact dimensions. Its highly innovative dissipative system and off-axis inclination offer a 45° orientation of the full beam out from the ceiling, in a fixture of minimal yet sophisticated design.

La gamma di incassi orientabili Lollo offre alte prestazioni in dimensioni estremamente compatte. Lo studio di un sistema di dissipazione estremamente innovativo, unita all'inclinazione fuori dall'asse dell'apparecchio, consente un'orientabilità di 45° che mantiene tutto il flusso luminoso fuori dal filo del soffitto, in un apparecchio dal design minimale e sofisticato.

La gamme d'encastrables orientables Lollo offre des prestations élevées dans des dimensions extrêmement compactes. L'étude d'un système de dissipation extrêmement innovant, unie à l'inclinaison hors de l'axe de l'appareil, permet une orientabilité de 45° qui maintient tout le flux lumineux hors du niveau du plafond, dans un appareil au design minimaliste et sophistiqué.

Die Produktreihe von ausrichtbaren Einbauleuchten Lollo bietet beste Leistungen in extrem kompakten Größen. Die Forschung eines extrem innovativen Ableitungssystem, verbunden mit der Neigung außerhalb der Achse des Gerätes, ermöglicht eine Ausrichtung von 45°, die den gesamten Lichtstrom weg von dem Draht der Decke hält, in einem Gerät von minimalistischen und anspruchsvollen Design.

La gama de empotrados orientables Lollo ofrece altas prestaciones en tamaños sumamente compactos. El estudio de un sistema de disipación sumamente innovador, junto con la inclinación fuera del eje del aparato, permite una orientación de 45° que mantiene todo el flujo luminoso fuera del ras del techo, en un aparato de diseño minimalista y sofisticado.


Supply current
500mA (V_f 36V)

Power
20W


CRI
93

2-Step MacAdam

Dimensions



Photometric diagrams

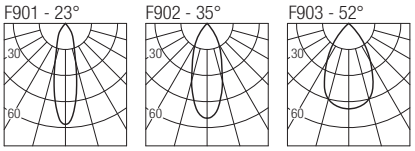

CCT/CRI/Flux

2700K	**1700 lm**
3000K	**1830 lm**
4000K	**1950 lm**

Code construction

LL2 X X X

	S	**M**	**W**
	23°	35°	52°
29	**39**	**49**	
2700K	3000K	4000K	
1	**2**	**5**	**6**
White	Grey	Black	Bronze

Note
The finishing refers to the outer ring of the luminaire only, the inner part of the optical compartment is always black.

Drivers 500mA

on/off
AL1084 (1) IP20 S.P. 55 mm
dimmable
AL4010 (1) IP20 PUSH 0/1..10V 72 mm
ALB451 (1) IP20 DALI 2 PUSH 46 mm
AL4151 (1) IP20 DALI 2 PUSH 72 mm
AL4153 (1) IP20 PUSH IGBT-TRIAC 56 m