FLEXA
LIGHTING

MAUNA SPIKE DTW

Dim to Warm IP-rated project

IP65 made in Italy

design Roberto Mantovani



IP65 Dim to Warm projectors offering a wide range of beam angles for precise and effective lighting effects. Suitable for installation in particularly aggressive environments. Optical quality and fine finishes combine in a product of great reliability and quality.

Proiettori IP65 Dim to Warm in grado di offrire un'ampia gamma di aperture di fascio per effetti luminosi precisi ed efficaci. Idonei per l'installazione in ambienti particolarmente aggressivi. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità e qualità.

Projecteurs Dim to Warm IP65 offrant une large gamme d'angles de rayonnement pour des effets lumineux précis et efficaces. Convient pour une installation dans des environnements particulièrement agressifs. La qualité optique et les finitions soignées se combinent dans un produit d'une grande fiabilité et d'une grande qualité.

IP65 Dim-to-Warm-Projektoren, die eine breite Palette von Abstrahlwinkeln für präzise und effektive Lichteffekte bieten. Geeignet für die Installation in besonders aggressiven Umgebungen. Optische Qualität und hochwertige Verarbeitung vereinen sich zu einem Produkt von hoher Zuverlässigkeit und Qualität.

Proyectores IP65 Dim to Warm que ofrecen una amplia gama de ángulos de haz para efectos de iluminación precisos y eficaces. Adecuados para su instalación en entornos especialmente agresivos. La calidad óptica y los finos acabados se combinan en un producto de gran fiabilidad y calidad.

Supply current
400mA (V_f 18V)


Power
8W

Series wiring


CRI
95

DTW 3000K to 1800K

Dimensions

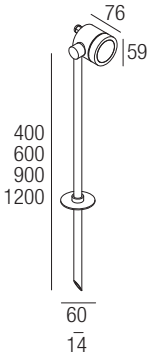

Photometric diagrams

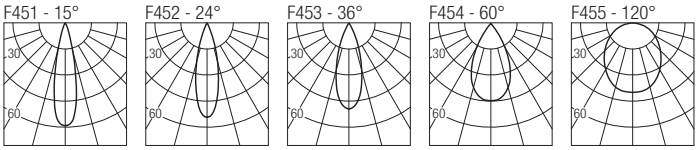

CCT/CRI/Flux

3000K	1800K
870 lm	**16 lm**

Code construction

DTWMUS24 X X X

- **N** 15° · **S** 24° · **M** 36° · **W** 60° · **X** 120°
- **B** White · **A** Anthracite · **N** Black · **V** Olive green · **K** COR-TEN
- **A** 40cm · **B** 60cm · **C** 90cm · **D** 120cm

Note
Made-to-measure cable available on request.

Accessories

LDMUS2401
Low luminance louver

Note
The filter must be ordered together with the lighting fixture.

XNTX20B White
XNTX20A Anthracite
XNTX20N Black
XNTX20V Olive green
XNTX20K COR-TEN
Antiglare snoot

Drivers 400mA
dimmable
AL4451DS (1..2) IP20 DALI 2 ⌀50 mm
AL8040 (1..2) IP67 DALI 2 ⌀48 mm