FLEXA LIGHTING

TYLA

Uplight

INOX IK10 IK09 IP67 made in Italy

design Roberto Mantovani



An IP67-rated, ground recessed micro-fixture with the highest build quality and optical performance. Fully anodized aluminium body and AISI 316L stainless steel or powder-coated anodized aluminium front. Extra-clear tempered glass, ATEX cable gland and neoprene cable.

Microincasso a terra IP67 di altissima qualità costruttiva ed elevate prestazioni ottiche. Corpo in alluminio anodizzato a spessore, frontale in acciaio INOX AISI316L o in alluminio anodizzato e verniciato a polveri. Vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene.

Micro-encastrable au sol IP 67 de très haute qualité constructive et prestations optiques élevées. Corps en aluminium anodisé à épaisseur, frontal en acier INOX AISI316L ou en aluminium anodisé et peint en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène.

Mikro-Einbau am Boden mit Schutzklasse IP67 mit hoher konstruktiver Qualität und hohen optischen Leistungen. Gehäuse aus eloxiertem Aluminium mit Stärke, Vorderteil aus Edelstahl AISI 316L oder eloxiertem und pulverbeschichtetem Aluminium. Extra gehärtetes Glas, ATEX Kabeldurchführung, Neopren-Kabel.

Micro-empotrado de suelo IP67 de alta calidad constructiva y elevadas prestaciones ópticas. Cuerpo de aluminio anodizado a ras, frontal de acero inoxidable AISI316L o de aluminio anodizado y barnizado en polvo. Vidrio ultraclaro templado, prensacables ATEX, cable de neopreno.

Supply current
350 mA (V_f 2,9V)


Power
1W

Series wiring


CRI
85 (2200K-4200K-6000K)
90 (2700K-3000K)

2-Step MacAdam

Dimensions



Photometric diagrams

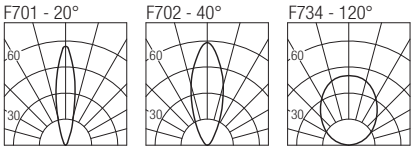

CCT/CRI/Flux

2200K	92 lm
2700K	101 lm
3000K	109 lm
4200K	116 lm
6000K	132 lm

Code construction


TY X X X X

G	A	N	V	K	Z		
Grey	Anthracite	Black	Olive green	COR-TEN	INOX Steel AISI 316L		
5	0	1	2	3	6	7	8
2200K	2700K	3000K	4200K	6000K	Blue	Green	Red
1	2	9					
20°	40°	120°					
1	2						
Round	Square						

Note
Made-to-measure cable available on request.

Accessories

CSTY01
Recessing box



Drivers 350mA

on/off
AL1034 (1..11) IP20 30 mm
AL1035 (1..11) IP20 40 mm
AL1037 (1..16) IP20 S.P. 55 mm
AL9011 (1..12) IP67 44 mm

dimmable
AL4000 (1..12) IP20 PUSH 0/1..10V 72 mm
ALMINI35 (1..12) IP20 DALI 2 PUSH 30 mm
AL4051 (1..14) IP20 DALI 2 PUSH 72 mm
AL4053 (1..14) IP20 PUSH IGBT-TRIAC 56 mm
AL6035 (2..8) IP67 DALI 2 44 mm
AL8035 (4..16) IP67 DALI 2 48 mm