FLEXA
LIGHTING

WOLF

Flush optich downlight

design Roberto Mantovani

CE 35mm IP44 made in Italy



A range of 24VDC recessed lights with an extremely well-finished and minimal design, they are ideal for applications extending from accenting exhibition components or architectural details to general lighting. Can be fitted with an anti-glare filter for maximum visual comfort.

Una gamma di incassi a 24VDC di design estremamente curato e minimale, ideale per applicazioni che spaziano dall'accento di elementi espositivi o di dettagli architettonici all'illuminazione generale. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Une gamme de spots 24VDC avec un design extrêmement soigné et minimaliste, parfaits pour des applications allant de l'accentuation d'éléments d'affichage ou de détails architecturaux à l'éclairage général. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

Eine Reihe von 24VDC-Einbauleuchten mit einem sehr sauberen und minimalistischen Design, ideal für Anwendungen, die von der Akzentuierung von Ausstellungselementen oder architektonischen Details bis zur Allgemeinbeleuchtung reichen. Kann mit Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Una gama de luminarias empotradas de 24VDC con un diseño extremadamente cuidado y minimalista, ideal para aplicaciones que van desde la acentuación de elementos de exposición o detalles arquitectónicos hasta la iluminación general. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.

Supply current
24VDC


Power
2W

Parallel wiring


CRI
85 (2200K-4200K) - 90 (2700K-3000K)

2-Step MacAdam

Dimensions



Photometric diagrams

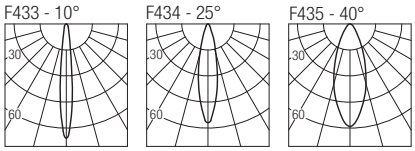

CCT/CRI/Flux

2200K	**117 lm**
2700K	**128 lm**
3000K	**133 lm**
4200K	**154 lm**

Code construction

WLF X X X X

- 5 2200K · 0 2700K · 1 3000K · 2 4200K
- 0 10° · 1 25° · 2 40°
- 1 White · 2 Aluminium (anodized) · 3 Chrome · 4 Gold · 5 Black (anodized) · 6 Bronze (anodized)
- 1 Round · 2 Square

Accessories

LWLF01
Low luminance louver

Note
The filter must be ordered together with the lighting fixture.

Drivers 24VDC

on/off
AL2124 (1..5) IP20 28 mm
AL2012 (1..12) IP20 60 mm
AL2031 (1..35) IP20 70 mm

dimmable
AL5012 (1..12) IP20 DALI 2 PUSH 0/1..10V 45 mm

dimming module
AL7035 IP20 DALI 2 PUSH 0/1..10V 44 mm

Note
Dimming module AL7035 to be used in combination with a 24VDC on/off power supply.