NYTA

Pi + Tau





Material:	Solid aluminium w/ matt black finish
Dimensions:	Pi: Ø: 10cm / 4 in, H: 5 cm / 2 in Tau: Ø: 8,5 cm / 3.4 in, H: 4,3 cm / 1.7 in
Cord length:	3 m / 10 ft
Weight:	Pi: 0.75 kg (ca. 26.5 oz) Tau: 0.7 kg (ca. 24.7 oz)
Luminous flux:	317 lm
System power:	7,73 W
Efficacy:	41 lm/W
LED:	Dim-to-warm 1800 K - 3000K, CRI 90, 350 mA
Control:	Phase cut, Casambi or Dali/Pushdim
Installation:	Surface-mounted canopy, recessed canopy or distribution canopy for up to 3 lights
Energy classes:	This luminaire contains built-in LED lamps of the energy class F.

Material:	*Massives Aluminium schwarz matt*
Maße:	*Pi: Ø: 10cm, H: 5 cm* *Tau: Ø: 8,5 cm, H: 4,3 cm*
Kabellänge:	*3 m*
Gewicht:	*Pi: 0,75 kg* *Tau: 0,7 kg*
Lichtstrom:	*317 lm*
Leistung:	*7,73 W*
Lichtausbeute:	*41 lm/W*
LED:	*Dim-to-warm 1800 K – 3000K, CRI90, 350 mA*
Steuerung:	*Phasenschnitt, Casambi oder Dali/Pushdim*
Installation:	*Anbau-Baldachin, Einbau-Baldachin oder Verteilerbaldachin für bis zu 3 Leuchten*
Energieklassen:	*Diese Leuchte enthält eingebaute LED-Lampen der Energieklasse F.*

Built-in LED light sources can be replaced by qualified experts.

Eingebaute LED-Leuchtmittel von Fachbetrieb austauschbar.

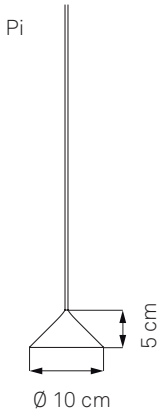

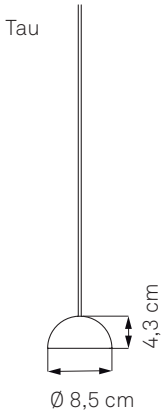

IP20
PRI: AC 220-240V 50 Hz
SEC: DC CC 350mA

Nyta UG, Sophienstrasse 108-110, 76135 Karlsruhe, Germany, T +49 721 47044707, info@nyta.eu, www.nyta.eu