Occhio


Coro moon cloud 5 datasheet

LED suspended luminaire cloud with 5 rod-shaped heads with fireball light source and round canopy. cloud version for surface mounting. Each suspension cable is adjustable between 20–170 cm (optional 120–270 cm, 200–350 cm) during mounting.

Version with integrated power supply unit, connection to 230 V AC mains voltage. Switching, dimming and »color tune« via Occhio air or »touchless control« (gesture control on head). All heads are synchronized (no individual head control). The color temperature can be adjusted continously between 2700–4000 K (optional 2200–3500 K).

The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 30°.



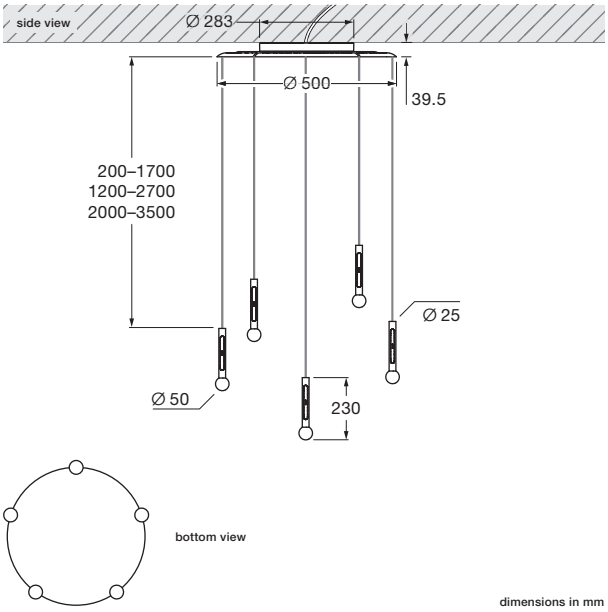

technical data Coro moon cloud 5


properties	material	aluminium, glass, PVD coated, painted, plastic
	cable length	200–1700 mm (can be adjusted during fitting) optional: 1200–2700 mm, 2000–3500 mm (can be adjusted during fitting)
	weight	5 kg
surface	head	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
	pads / cover	matt white, matt black
	cable	white, black
	canopy	matt white, matt black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 5 × 6 W (incl. Occhio power supply unit approx. 41 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	via »touchless control« and Occhio air
	connection	230 V AC
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20

Occhio

Coro moon cloud 5
lighting effects





moon
direct, glare-free light,
beam angle approx. 30°

optics:	Occhio fireball	
power:	high color	5 × 6 W
luminous flux:	2200–3500 K	5 × 340–440 lm
	2700–4000 K	5 × 390–470 lm