

Occhio


Coro moon zero v »air« datasheet

LED recessed downlight with fireball light source (non-tiltable). zero v downlight version for flush mounting in hollow ceilings with revision. The downlight is mounted with a separate mounting sleeve. Version with remote power supply unit, connection to 230 V AC mains voltage. Switching, dimming and »color tune« via Occhio air. The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K).

The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 30°.

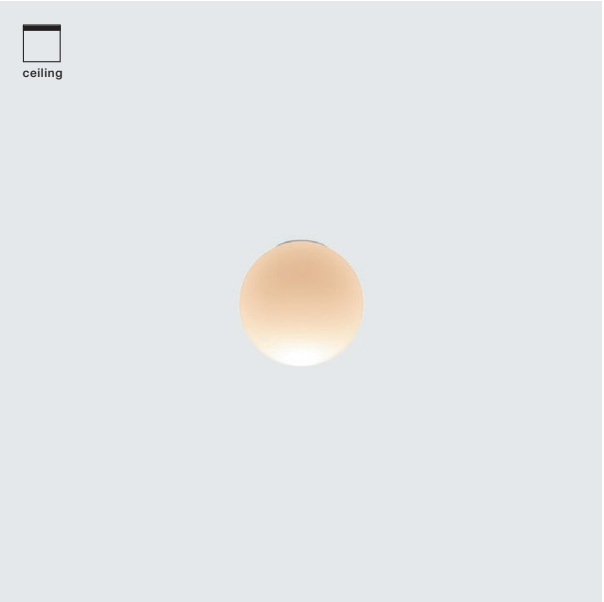

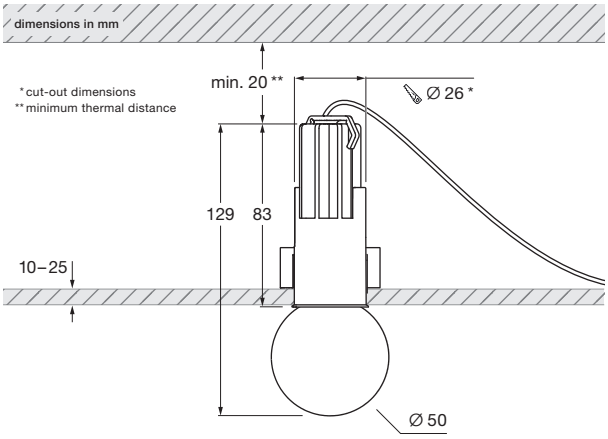



incl. flat driver »air« (removable)
L 95 × W 23.5 × H 20 (total cable length 250)


incl. power supply unit (removable)
L 165 × W 50 × H 23.6 (cable length 200)


technical data Coro moon zero v »air«

properties	material	aluminium, glass, painted, plastic
	weight	0.6 kg
surface	holding ring	white, black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 7 W (incl. Occhio power supply unit approx. 9 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	via Occhio air
	connection	230 V AC
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20

Coro moon zero v »air« lighting effects

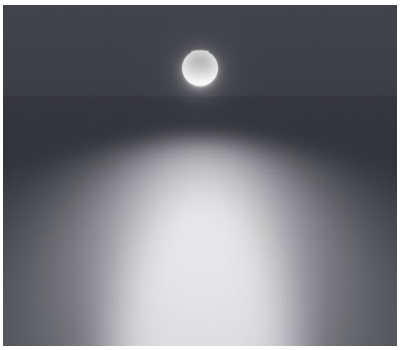



moon
direct, glare-free light,
beam angle approx. 30°

optics:	Occhio fireball	
power:	high color	7 W
luminous flux:	2200–3500 K	420–550 lm
	2700–4000 K	480–590 lm