
Occhio


Coro sospeso fix flat »air«
datasheet

LED suspended luminare with rod-shaped head and zoom optic. Version with flat base for installation on hollow ceilings. The suspension cable is adjustable to max. 350 cm (optional max. 1000 cm) during mounting.

Version with remote power supply unit, connection to 230 V AC mains voltage. Switching, dimming and »color tune« via Occhio air or »touchless control« (gesture control on head). The color temperature can be adjusted continously between 2700–4000 K (optional 2200–3500 K). The zoom optic is glare-free and the beam angle continously adjustable between 40–80°.



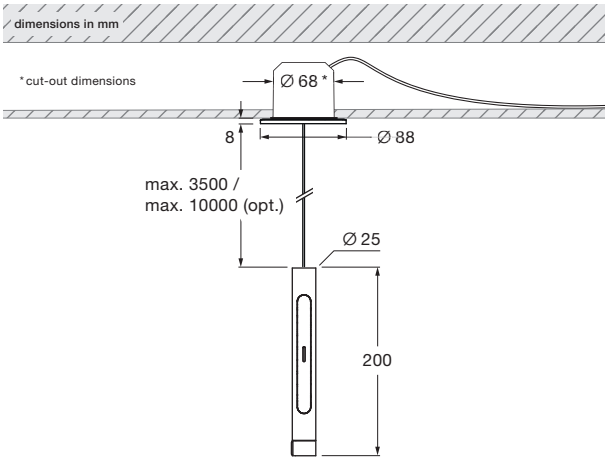



incl. power supply unit (removable)
L 165 × W 50 × H 23.6 (cable length 200)


technical data Coro sospeso fix flat »air«

properties	material	aluminium, glass, PVD coated, painted, plastic
	height setting	max. 3500 mm (can be adjusted during fitting) optional: max. 10000 mm (can be adjusted during fitting)
	weight	0.7 kg
surface	head / zoom	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
	pads / cover	matt white, matt black
	cable	white, black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 6 W (incl. Occhio power supply unit approx. 8 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	via »touchless control« and Occhio air
	connection	230 V AC
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20

Coro sospeso fix flat »air«
lighting effects






Z40
directed light (approx. 40°)

optics:	zoom lens	
power:	high color	6 W
luminous flux:	2200–3500 K	130–170 lm
	2700–4000 K	150–180 lm



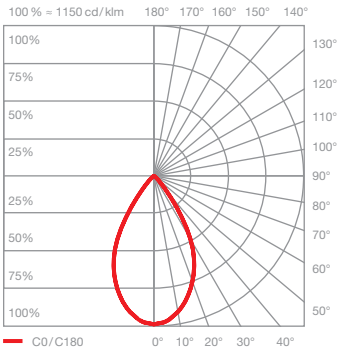

Z80
directed light (approx. 80°)

optics:	zoom lens	
power:	high color	6 W
luminous flux:	2200–3500 K	200–260 lm
	2700–4000 K	230–280 lm