[trizo]21®

Handmade in Belgium

Specs & Techs
06/2025

[trizo]21®

Handmade in Belgium

Specs & Techs
06/2025

www.trizo21.com

[Index]

Floor & Table p.7

Ceiling p.14

Wall p.96

Suspension p.136

Bathroom p.198

Outdoor p.217

Track p.232

Productcodes p.252

Colours p.268

Glossary p.269

Floor & Table




2THIRTY

2Thirty-Floor 1 9
2Thirty-Floor 2 9




AUDE

Aude-Table 11

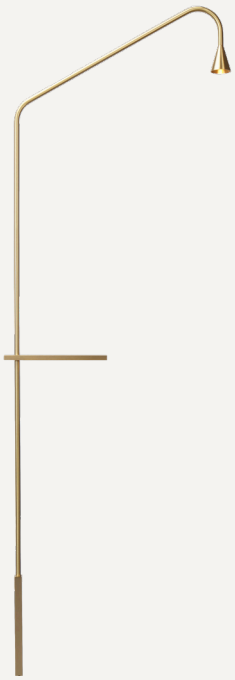

AUSTERE

Austere-Table 12

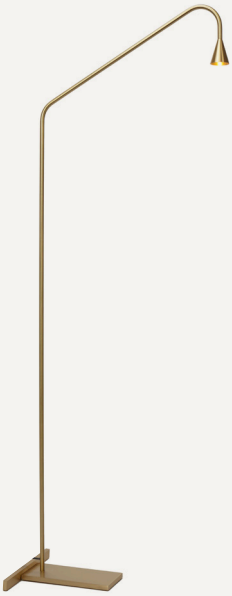

AUSTERE

Austere-Floor 12



AUDE

Aude-Floor 10




BOULY

Bouly Table 13



SCAR-LED


Scar-Led Table 13

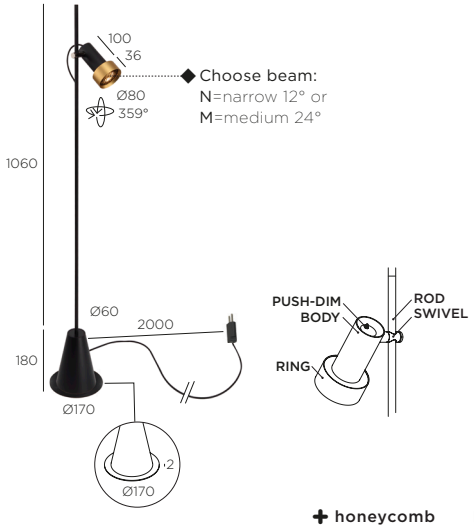

2Thirty-Floor 1

110V-230V - PU **(PUSH-DIM) on armature**
1 x LED array 11,8W **(LED incl.)** - 350mA - 1241lm - 2700K - CRI >97
Support disc **(Ø170mm x H 2mm)** for uneven surfaces included
materials: brass, aluminium
FLOOR - IP50


		DIM	BASE & BODY black / ROD black / SWIVEL gunmetal / RING black	BASE & BODY black / ROD black / SWIVEL gunmetal / RING bronze	BASE & BODY black / ROD black / SWIVEL gunmetal / RING gold	BASE & BODY black / ROD black / SWIVEL gunmetal / RING alu
+ honeycomb	EU plug	PU	THF EU 12H ◆	THF EU 17H ◆	THF EU 18H ◆	THF EU 19H ◆
+ honeycomb	UK plug	PU	THF UK 12H ◆	THF UK 17H ◆	THF UK 18H ◆	THF UK 19H ◆
+ honeycomb	US plug	PU	THF US 12H ◆	THF US 17H ◆	THF US 18H ◆	THF US 19H ◆
+ honeycomb	AU plug	PU	THF AU 12H ◆	THF AU 17H ◆	THF AU 18H ◆	THF AU 19H ◆

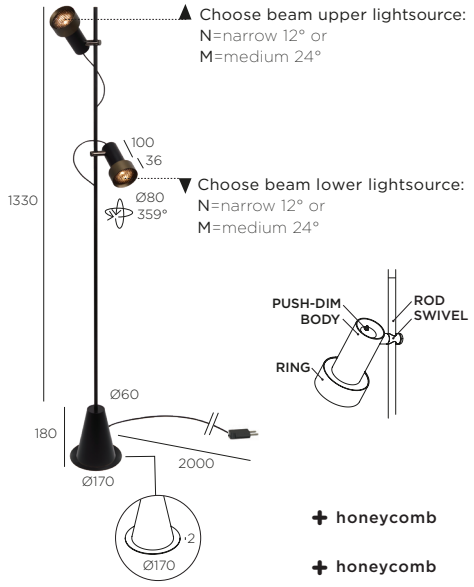

2Thirty-Floor 2

110V-230V - PU **(PUSH-DIM) on armature**
2 x LED array 11,8W **(LED incl.)** - 350mA - 2 x 1241lm - 2700K - CRI >97
Support disc **(Ø170mm x H 2mm)** for uneven surfaces included
materials: brass, aluminium
FLOOR - IP50


		DIM	BASE & BODY black / ROD black / SWIVEL gunmetal / RING black	BASE & BODY black / ROD black / SWIVEL gunmetal / RING bronze	BASE & BODY black / ROD black / SWIVEL gunmetal / RING gold	BASE & BODY black / ROD black / SWIVEL gunmetal / RING alu
+ honeycomb	EU plug	PU	THF EU 22H ▲▼	THF EU 27H ▲▼	THF EU 28H ▲▼	THF EU 29H ▲▼
+ honeycomb	UK plug	PU	THF UK 22H ▲▼	THF UK 27H ▲▼	THF UK 28H ▲▼	THF UK 29H ▲▼
+ honeycomb	US plug	PU	THF US 22H ▲▼	THF US 27H ▲▼	THF US 28H ▲▼	THF US 29H ▲▼
+ honeycomb	AU plug	PU	THF AU 22H ▲▼	THF AU 27H ▲▼	THF AU 28H ▲▼	THF AU 29H ▲▼

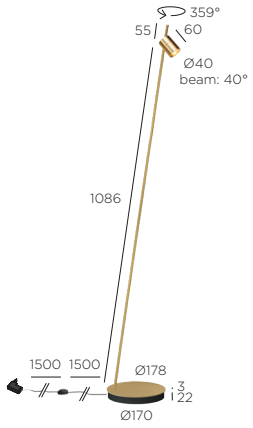

Aude-Floor

100V-240V - **plugdriver with** PU **(PUSH-DIM) button on cable**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
material: brass
FLOOR - IP50


			DIM	FRAME brass	FRAME gunmetal	FRAME bronze	FRAME nickel
	EU plug	**2700K**	PU	ADFL 1273			
	EU plug	**2700K**	PU		ADFL 1274	ADFL 1277	ADFL 1279
	UK plug	**2700K**	PU	ADFL 1273UK			
	UK plug	**2700K**	PU		ADFL 1274UK	ADFL 1277UK	ADFL 1279UK
	US plug	**2700K**	PU	ADFL 1273US			
	US plug	**2700K**	PU		ADFL 1274US	ADFL 1277US	ADFL 1279US
	AU plug	**2700K**	PU	ADFL 1273AU			
	AU plug	**2700K**	PU		ADFL 1274AU	ADFL 1277AU	ADFL 1279AU
	EU plug	**3000K**	PU	ADFL 1303			
	EU plug	**3000K**	PU		ADFL 1304	ADFL 1307	ADFL 1309
	UK plug	**3000K**	PU	ADFL 1303UK			
	UK plug	**3000K**	PU		ADFL 1304UK	ADFL 1307UK	ADFL 1309UK
	US plug	**3000K**	PU	ADFL 1303US			
	US plug	**3000K**	PU		ADFL 1304US	ADFL 1307US	ADFL 1309US
	AU plug	**3000K**	PU	ADFL 1303AU			
	AU plug	**3000K**	PU		ADFL 1304AU	ADFL 1307AU	ADFL 1309AU
+ honeycomb	**EU plug**	**2700K**	PU	ADFL 1273H			
+ honeycomb	**EU plug**	**2700K**	PU		ADFL 1274H	ADFL 1277H	ADFL 1279H
+ honeycomb	**UK plug**	**2700K**	PU	ADFL 1273HUK			
+ honeycomb	**UK plug**	**2700K**	PU		ADFL 1274HUK	ADFL 1277HUK	ADFL 1279HUK
+ honeycomb	**US plug**	**2700K**	PU	ADFL 1273HUS			
+ honeycomb	**US plug**	**2700K**	PU		ADFL 1274HUS	ADFL 1277HUS	ADFL 1279HUS
+ honeycomb	**AU plug**	**2700K**	PU	ADFL 1273HAU			
+ honeycomb	**AU plug**	**2700K**	PU		ADFL 1274HAU	ADFL 1277HAU	ADFL 1279HAU
+ honeycomb	**EU plug**	**3000K**	PU	ADFL 1303H			
+ honeycomb	**EU plug**	**3000K**	PU		ADFL 1304H	ADFL 1307H	ADFL 1309H
+ honeycomb	**UK plug**	**3000K**	PU	ADFL 1303HUK			
+ honeycomb	**UK plug**	**3000K**	PU		ADFL 1304HUK	ADFL 1307HUK	ADFL 1309HUK
+ honeycomb	**US plug**	**3000K**	PU	ADFL 1303HUS			
+ honeycomb	**US plug**	**3000K**	PU		ADFL 1304HUS	ADFL 1307HUS	ADFL 1309HUS
+ honeycomb	**AU plug**	**3000K**	PU	ADFL 1303HAU			
+ honeycomb	**AU plug**	**3000K**	PU		ADFL 1304HAU	ADFL 1307HAU	ADFL 1309HAU



Aude-Table

100V-240V - **plugdriver with** PU **(PUSH-DIM) button on cable**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
TABLE - IP50


			DIM	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
	EU plug	**2700K**	PU	ADTA 1273	ADTA 1272			
	EU plug	**2700K**	PU			ADTA 1274	ADTA 1277	ADTA 1279
	UK plug	**2700K**	PU	ADTA 1273UK	ADTA 1272UK			
	UK plug	**2700K**	PU			ADTA 1274UK	ADTA 1277UK	ADTA 1279UK
	US plug	**2700K**	PU	ADTA 1273US	ADTA 1272US			
	US plug	**2700K**	PU			ADTA 1274US	ADTA 1277US	ADTA 1279US
	AU plug	**2700K**	PU	ADTA 1273AU	ADTA 1272AU			
	AU plug	**2700K**	PU			ADTA 1274AU	ADTA 1277AU	ADTA 1279AU
	EU plug	**3000K**	PU	ADTA 1303	ADTA 1302			
	EU plug	**3000K**	PU			ADTA 1304	ADTA 1307	ADTA 1309
	UK plug	**3000K**	PU	ADTA 1303UK	ADTA 1302UK			
	UK plug	**3000K**	PU			ADTA 1304UK	ADTA 1307UK	ADTA 1309UK
	US plug	**3000K**	PU	ADTA 1303US	ADTA 1302US			
	US plug	**3000K**	PU			ADTA 1304US	ADTA 1307US	ADTA 1309US
	AU plug	**3000K**	PU	ADTA 1303AU	ADTA 1302AU			
	AU plug	**3000K**	PU			ADTA 1304AU	ADTA 1307AU	ADTA 1309AU
+ honeycomb	**EU plug**	**2700K**	PU	ADTA 1273H	ADTA 1272H			
+ honeycomb	**EU plug**	**2700K**	PU			ADTA 1274H	ADTA 1277H	ADTA 1279H
+ honeycomb	**UK plug**	**2700K**	PU	ADTA 1273HUK	ADTA 1272HUK			
+ honeycomb	**UK plug**	**2700K**	PU			ADTA 1274HUK	ADTA 1277HUK	ADTA 1279HUK
+ honeycomb	**US plug**	**2700K**	PU	ADTA 1273HUS	ADTA 1272HUS			
+ honeycomb	**US plug**	**2700K**	PU			ADTA 1274HUS	ADTA 1277HUS	ADTA 1279HUS
+ honeycomb	**AU plug**	**2700K**	PU	ADTA 1273HAU	ADTA 1272HAU			
+ honeycomb	**AU plug**	**2700K**	PU			ADTA 1274HAU	ADTA 1277HAU	ADTA 1279HAU
+ honeycomb	**EU plug**	**3000K**	PU	ADTA 1303H	ADTA 1302H			
+ honeycomb	**EU plug**	**3000K**	PU			ADTA 1304H	ADTA 1307H	ADTA 1309H
+ honeycomb	**UK plug**	**3000K**	PU	ADTA 1303HUK	ADTA 1302HUK			
+ honeycomb	**UK plug**	**3000K**	PU			ADTA 1304HUK	ADTA 1307HUK	ADTA 1309HUK
+ honeycomb	**US plug**	**3000K**	PU	ADTA 1303HUS	ADTA 1302HUS			
+ honeycomb	**US plug**	**3000K**	PU			ADTA 1304HUS	ADTA 1307HUS	ADTA 1309HUS
+ honeycomb	**AU plug**	**3000K**	PU	ADTA 1303HAU	ADTA 1302HAU			
+ honeycomb	**AU plug**	**3000K**	PU			ADTA 1304HAU	ADTA 1307HAU	ADTA 1309HAU



Austere-Floor

100V-240V - **plugdriver with** PU **(PUSH-DIM) button on cable**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
The base bracket is standard included and recommended for optimal stability
material: brass
FLOOR - IP50


DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
EU plug PU	HVFL 1003	HVFL 1002	HVFL 1001			
EU plug PU				HVFL 1004	HVFL 1007	HVFL 1009
UK plug PU	HVFL 1003UK	HVFL 1002UK	HVFL 1001UK			
UK plug PU				HVFL 1004UK	HVFL 1007UK	HVFL 1009UK
US plug PU	HVFL 1003US	HVFL 1002US	HVFL 1001US			
US plug PU				HVFL 1004US	HVFL 1007US	HVFL 1009US
AU plug PU	HVFL 1003AU	HVFL 1002AU	HVFL 1001AU			
AU plug PU				HVFL 1004AU	HVFL 1007AU	HVFL 1009AU

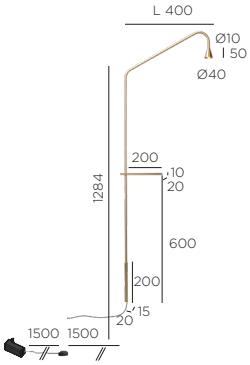

Austere-Table

100V-240V - **plugdriver with** PU **(PUSH-DIM) button on cable**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
The base bracket is standard included and recommended for optimal stability
material: brass
TABLE - IP50


DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
EU plug PU	HVTA 1003	HVTA 1002	HVTA 1001			
EU plug PU				HVTA 1004	HVTA 1007	HVTA 1009
UK plug PU	HVTA 1003UK	HVTA 1002UK	HVTA 1001UK			
UK plug PU				HVTA 1004UK	HVTA 1007UK	HVTA 1009UK
US plug PU	HVTA 1003US	HVTA 1002US	HVTA 1001US			
US plug PU				HVTA 1004US	HVTA 1007US	HVTA 1009US
AU plug PU	HVTA 1003AU	HVTA 1002AU	HVTA 1001AU			
AU plug PU				HVTA 1004AU	HVTA 1007AU	HVTA 1009AU



Bouly Table

230V - **EU-plugdriver with** PU **(PUSH-DIM) button on cable**
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
material: aluminium
TABLE - IP40

	DIM	FRAME black	FRAME white	FRAME grey	FRAME chrome
EU plug	PU	BOWW 5202	BOWW 5201	BOWW 5203	
EU plug	PU				BOWW 5209



◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Scar-Led Table

230V - **EU-plugdriver with switch on cable**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
materials: aluminium, silicon
TABLE - IP40

FLEX LENGTH	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX black silicon / FRAME alu	FLEX alu / FRAME alu	FLEX bronze / FRAME bronze
L 750	SCAR 2751◆	SCAR 2752◆	SCAR 2750◆	SCAR 2753◆	SCAR 2757◆

Ceiling



2THIRTY

2Thirty-C1 16
2Thirty-C1 in 16
2Thirty-C2 in 16
2Thirty-C1 in 350mA 17
2Thirty-C2 in 350mA 17
2Thirty-CH2 18
2Thirty-CV2 18



7TY

7Ty in 19
7Ty up 19



AUDETTE

Audette in 20
Audette 1 up 21
Audette 1 up Rounded 21
Audette 2 up 22
Audette 2 up Rounded 22
Audette 3 up 23
Audette 4 up 24
Audette C1 in Rounded 25
Audette C2 in Rounded 26
Audette R6 27



AUDETTE-DUO

Audette-Duo in 28
Audette-Duo 1 up 29
Audette-Duo 1 up Rounded 29
Audette-Duo 2 up 30
Audette-Duo 2 up Rounded 30
Audette-Duo 3 up 31
Audette-Duo 4 up 32
Audette-Duo C1 in Rounded 33
Audette-Duo C2 in Rounded 34
Audette-Duo R6 35



AUDETTE-VARIÉ

Audette-Varié in 36
Audette-Varié 1 up 37
Audette-Varié 1 up Rounded 37
Audette-Varié 2 up 37
Audette-Varié 2 up Rounded 38
Audette-Varié 3 up 38
Audette-Varié 4 up 39
Audette-Varié C1 in Rounded 39
Audette-Varié C2 in Rounded 40



AUDINNI

Audinni 41



AUDINNO

Audinno 42



AUDY

Audy-In 43
Audy 1 up Rounded 44
Audy 2 up Rounded 44
Audy-Duo 1 up Rounded 45
Audy-Duo 2 up Rounded 45



AUSTIN

Austin 46
Austin Adjustable 47
Austin 1 up Adjustable Rounded 47
Austin 2 up Adjustable Rounded 48
Austin C1 in Adjustable Rounded 48
Austin C2 in Adjustable Rounded 49



AUSTERE-ELEMENTS

Austere-Elements design 50
Austere-Elements configurations 51
Austere-Elements rods & straps 55
Austere-Elements rods & straps steelcable 56
Austere-Elements connectors 57
Austere-Elements connectors with light-element 58
Austere-Elements connectors with powercord 59
Austere-Elements connectors with light-element & powercord 60
Austere-Elements required drivers 62
Austere-Elements mounting options 62



BILO

Bilo C in FROSTED 63
Bilo C in MATT 64
Bilo up FROSTED 65
Bilo up MATT 65

Ceiling



BILY

Bily 16 in 66
Bily 16 up 66



BOULO

Boulo C in FROSTED 67
Boulo C in MATT 68



BOULY

Bouly 4 69
Bouly 16 70



BOULY W/C

Bouly W/C 71
Bouly W/C D+B 71



CODE

Code 1 GU10 72
Code 1 LED 72
Code 2 GU10 73
Code 2 LED 73



KWA-KWA

Kwa-Kwa 1F Round 73
Kwa-Kwa 1F Square 74
Kwa-Kwa 1F +B Round 74
Kwa-Kwa 1FT Rounded LED 74
Kwa-Kwa 1FT Rectangular LED 75
Kwa-Kwa 2FT Rounded LED 75
Kwa-Kwa 2FT Rectangular LED 75
Kwa-Kwa 4FT Rounded LED 75



MINI-PI UP

Mini-Pi in 76
Mini-Pi 1 up 76
Mini-Pi 1 up Round 77
Mini-Pi 2 in 77
Mini-Pi 2 up 77
Mini-Pi 3 up 78



NAGA

Naga 78




PIN-UP

Pin-In 1 78
Pin-In 2 79
Pin-Up 1 Round LED 79
Pin-Up 1 Square LED 79
Pin-Up 2 LED 80
Pin-Up 4 LED 80
Pin-Up 6 LED 80



R-RANGE


R07 in 81
R07 Rimless 81
R07 up 82
R51 in GU10 82
R51 in LED 83
R51 Rimless LED 84
R51 up GU10 84
R51 up LED 85
R52 in GU10 85
R52 in LED 86
R52 Rimless LED 87
R52 up GU10 87
R52 up LED 88
R54 in GU10 88
R54 in LED 89
R54 Rimless LED 89
R54 up GU10 90
R54 up LED 90
R70 in 91
R70 Rimless 91
R70 up 92
R110 in G53 92
R110 Rimless 93
R110 up G53 LED 93
R111 in G53 94
R111 Rimless 94
R111 up G53 LED 95




Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty-C1

230V (110V **on demand**)
1 x LED module 10W **(LED incl.)** - 230V - 1000lm - 2700K - CRI >90 - **TRIAC dimmable**
materials: brass, aluminium
CEILING - IP50




	BASE & BODY black ROD black SWIVEL black RING black	BASE & BODY black ROD black SWIVEL black RING bronze	BASE & BODY black ROD black SWIVEL black RING gold	BASE & BODY black ROD black SWIVEL black RING alu
	THC 12223◆	THC 17223◆	THC 18223◆	THC 19223◆
+ honeycomb	THC 12223H◆	THC 17223H◆	THC 18223H◆	THC 19223H◆




Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty-C1 in

230V (110V **on demand**)
1 x LED module 10W **(LED incl.)** - 230V - 1000lm - 2700K - CRI >90 - **TRIAC dimmable**
materials: brass, aluminium
CEILING - IP50



	BASE & BODY black ROD black SWIVEL black RING black	BASE & BODY black ROD black SWIVEL black RING bronze	BASE & BODY black ROD black SWIVEL black RING gold	BASE & BODY black ROD black SWIVEL black RING alu
	THIN 12223◆	THIN 17223◆	THIN 18223◆	THIN 19223◆
+ honeycomb	THIN 12223H◆	THIN 17223H◆	THIN 18223H◆	THIN 19223H◆




Choose beam upper lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°


Choose beam lower lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty-C2 in

230V (110V **on demand**)
2 x LED module 10W **(LED incl.)** - 230V - 2 x 1000lm - 2700K - CRI >90 - **TRIAC dimmable**
materials: brass, aluminium
CEILING - IP50




	BASE & BODY black ROD black SWIVEL black RING black	BASE & BODY black ROD black SWIVEL black RING bronze	BASE & BODY black ROD black SWIVEL black RING gold	BASE & BODY black ROD black SWIVEL black RING alu
	THIN 22223 ▲▼	THIN 27223 ▲▼	THIN 28223 ▲▼	THIN 29223 ▲▼
+ honeycomb	THIN 22223H ▲▼	THIN 27223H ▲▼	THIN 28223H ▲▼	THIN 29223H ▲▼



Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty-C1 in 350mA

350mA - required remote mounted driver see below
1 x LED array 11,8W **(LED incl.)** - 350mA - 1241lm - 2700K - CRI >97 - **dimmable**
materials: brass, aluminium
CEILING - IP50




	BASE & BODY black ROD black SWIVEL black RING black	BASE & BODY black ROD black SWIVEL black RING bronze	BASE & BODY black ROD black SWIVEL black RING gold	BASE & BODY black ROD black SWIVEL black RING alu
	●●●●	●●●●	●●●●	●●●●
	TH3N 12223◆	TH3N 17223◆	TH3N 18223◆	TH3N 19223◆
+ honeycomb	TH3N 12223H◆	TH3N 17223H◆	TH3N 18223H◆	TH3N 19223H◆

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Choose beam upper lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°

Choose beam lower lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty-C2 in 350mA

350mA - required remote mounted driver see below
2 x LED array 11,8W **(LED incl.)** - 350mA - 2 x 1241lm - 2700K - CRI >97 - **dimmable**
materials: brass, aluminium
CEILING - IP50




	BASE & BODY black ROD black SWIVEL black RING black	BASE & BODY black ROD black SWIVEL black RING bronze	BASE & BODY black ROD black SWIVEL black RING gold	BASE & BODY black ROD black SWIVEL black RING alu
	●●●●	●●●●	●●●●	●●●●
	TH3N 22223 ▲▼	TH3N 27223 ▲▼	TH3N 28223 ▲▼	TH3N 29223 ▲▼
+ honeycomb	TH3N 22223H ▲▼	TH3N 27223H ▲▼	TH3N 28223H ▲▼	TH3N 29223H ▲▼

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Choose beam left lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°


Choose beam right lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty-CH2

230V (110V **on demand**)
2 x LED module 10W **(LED incl.)** - 230V - 2 x 1000lm - 2700K - CRI >90 - **TRIAC dimmable**
materials: brass, aluminium
CEILING - IP50



	BASE & BODY black	ROD black	SWIVEL black	RING black	BASE & BODY black	ROD black	SWIVEL black	RING bronze	BASE & BODY black	ROD black	SWIVEL black	RING gold	BASE & BODY black	ROD black	SWIVEL black	RING alu
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	THP 22223 ◄►				THP 27223 ◄►				THP 28223 ◄►				THP 29223 ◄►			
+ honeycomb	THP 22223H ◄►				THP 27223H ◄►				THP 28223H ◄►				THP 29223H ◄►			




Choose beam upper lightsource:
N=narrow 12° or M=medium 24° or W=wide 40°

Choose beam upper lightsource:
N=narrow 12° or M=medium 24° or W=wide 40°

2Thirty-CV2

230V (110V **on demand**)
2 x LED module 10W **(LED incl.)** - 230V - 2 x 1000lm - 2700K - CRI >90 - **TRIAC dimmable**
materials: brass, aluminium
CEILING - IP50



	BASE & BODY black	ROD black	SWIVEL black	RING black	BASE & BODY black	ROD black	SWIVEL black	RING bronze	BASE & BODY black	ROD black	SWIVEL black	RING gold	BASE & BODY black	ROD black	SWIVEL black	RING alu
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	THC 22223 ▲▼				THC 27223 ▲▼				THC 28223 ▲▼				THC 29223 ▲▼			
+ honeycomb	THC 22223H ▲▼				THC 27223H ▲▼				THC 28223H ▲▼				THC 29223H ▲▼			



Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

7Ty in

350mA - **required driver see below**
1 x LED array 11,8W **(LED incl.)** - 350mA - 1241lm - 2700K - CRI >97
***FALSE ceiling=** aperture: Ø60 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø60 - depth: min. 110mm (driver remote)
material: aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP50**

FALSE & CONCRETE ceiling



	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
	STIN 1002◆	STIN 1001◆	STIN 1007◆	STIN 1008◆	STIN 1009◆
+ honeycomb	STIN 1002H◆	STIN 1001H◆	STIN 1007H◆	STIN 1008H◆	STIN 1009H◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

7Ty up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 11,8W **(LED incl.)** - 250mA - 913lm - 2700K - CRI >97
material: aluminium
CEILING - IP50


	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
	LC	STUP 1002◆	STUP 1001◆	STUP 1007◆	STUP 1008◆	STUP 1009◆
+ honeycomb	LC	STUP 1002H◆	STUP 1001H◆	STUP 1007H◆	STUP 1008H◆	STUP 1009H◆



Choose beam:
M=medium 23° or
W=wide 40°

Audette in

350mA - required driver see below
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
materials: brass, aluminium
CEILING - IP50



FALSE ceiling



		COVER brass / SWIVEL brass / BODY brass / RING brass	COVER black / SWIVEL black / BODY black / RING black	COVER white / SWIVEL white / BODY white / RING white	COVER gunmetal / SWIVEL gunmetal / BODY gunmetal / RING gunmetal	COVER bronze / SWIVEL bronze / BODY bronze / RING bronze	COVER nickel / SWIVEL nickel / BODY nickel / RING nickel
	2700K	ADFC 2333◆					
	2700K		ADFC 2222◆	ADFC 2111◆			
	2700K				ADFC 2444◆	ADFC 2777◆	ADFC 2999◆
	3000K	ADFC 3333◆					
	3000K		ADFC 3222◆	ADFC 3111◆			
	3000K				ADFC 3444◆	ADFC 3777◆	ADFC 3999◆
+ honeycomb	2700K	ADFC 2333H◆					
+ honeycomb	2700K		ADFC 2222H◆	ADFC 2111H◆			
+ honeycomb	2700K				ADFC 2444H◆	ADFC 2777H◆	ADFC 2999H◆
+ honeycomb	3000K	ADFC 3333H◆					
+ honeycomb	3000K		ADFC 3222H◆	ADFC 3111H◆			
+ honeycomb	3000K				ADFC 3444H◆	ADFC 3777H◆	ADFC 3999H◆

CONCRETE ceiling




		COVER brass / SWIVEL brass / BODY brass / RING brass	COVER black / SWIVEL black / BODY black / RING black	COVER white / SWIVEL white / BODY white / RING white	COVER gunmetal / SWIVEL gunmetal / BODY gunmetal / RING gunmetal	COVER bronze / SWIVEL bronze / BODY bronze / RING bronze	COVER nickel / SWIVEL nickel / BODY nickel / RING nickel
	2700K	ADCC 2333◆					
	2700K		ADCC 2222◆	ADCC 2111◆			
	2700K				ADCC 2444◆	ADCC 2777◆	ADCC 2999◆
	3000K	ADCC 3333◆					
	3000K		ADCC 3222◆	ADCC 3111◆			
	3000K				ADCC 3444◆	ADCC 3777◆	ADCC 3999◆
+ honeycomb	2700K	ADCC 2333H◆					
+ honeycomb	2700K		ADCC 2222H◆	ADCC 2111H◆			
+ honeycomb	2700K				ADCC 2444H◆	ADCC 2777H◆	ADCC 2999H◆
+ honeycomb	3000K	ADCC 3333H◆					
+ honeycomb	3000K		ADCC 3222H◆	ADCC 3111H◆			
+ honeycomb	3000K				ADCC 3444H◆	ADCC 3777H◆	ADCC 3999H◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Choose beam:
M=medium 23° or
W=wide 40°

Audette 1 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black	SWIVEL brass	BODY brass	RING brass	BASE white	SWIVEL brass	BODY brass	RING brass	BASE black	SWIVEL black	BODY black	RING black	BASE white	SWIVEL white	BODY white	RING white
	2700K	LC	ADST 122333◆				ADST 121333◆											
	2700K	LC									ADST 122222◆				ADST 121111◆			
	3000K	LC	ADST 132333◆				ADST 131333◆											
	3000K	LC									ADST 132222◆				ADST 131111◆			
+ honeycomb	2700K	LC	ADST 122333H◆				ADST 121333H◆											
+ honeycomb	2700K	LC									ADST 122222H◆				ADST 121111H◆			
+ honeycomb	3000K	LC	ADST 132333H◆				ADST 131333H◆											
+ honeycomb	3000K	LC									ADST 132222H◆				ADST 131111H◆			




Choose beam:
M=medium 23° or
W=wide 40°

Audette 1 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE brass	SWIVEL brass	BODY brass	RING brass	BASE black	SWIVEL black	BODY black	RING black	BASE white	SWIVEL white	BODY white	RING white	BASE gunmetal	SWIVEL gunmetal	BODY gunmetal	RING gunmetal	BASE bronze	SWIVEL bronze	BODY bronze	RING bronze	BASE nickel	SWIVEL nickel	BODY nickel	RING nickel
	2700K	LC	ADRT 123333◆																							
	2700K	LC					ADRT 122222◆				ADRT 121111◆															
	2700K	LC													ADRT 124444◆				ADRT 127777◆				ADRT 129999◆			
	3000K	LC	ADRT 133333◆																							
	3000K	LC					ADRT 132222◆				ADRT 131111◆															
	3000K	LC													ADRT 134444◆				ADRT 137777◆				ADRT 139999◆			
+ honeycomb	2700K	LC	ADRT 123333H◆																							
+ honeycomb	2700K	LC					ADRT 122222H◆				ADRT 121111H◆															
+ honeycomb	2700K	LC													ADRT 124444H◆				ADRT 127777H◆				ADRT 129999H◆			
+ honeycomb	3000K	LC	ADRT 133333H◆																							
+ honeycomb	3000K	LC					ADRT 132222H◆				ADRT 131111H◆															
+ honeycomb	3000K	LC													ADRT 134444H◆				ADRT 137777H◆				ADRT 139999H◆			




Choose beam:
M=medium 23° or
W=wide 40°

Audette 2 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black, SWIVEL brass, BODY brass, RING brass	BASE white, SWIVEL brass, BODY brass, RING brass	BASE black, SWIVEL black, BODY black, RING black	BASE white, SWIVEL white, BODY white, RING white
	2700K	LC	ADST 222333◆	ADST 221333◆		
	2700K	LC			ADST 222222◆	ADST 221111◆
	3000K	LC	ADST 232333◆	ADST 231333◆		
	3000K	LC			ADST 232222◆	ADST 231111◆
+ honeycomb	2700K	LC	ADST 222333H◆	ADST 221333H◆		
+ honeycomb	2700K	LC			ADST 222222H◆	ADST 221111H◆
+ honeycomb	3000K	LC	ADST 232333H◆	ADST 231333H◆		
+ honeycomb	3000K	LC			ADST 232222H◆	ADST 231111H◆




Choose beam:
M=medium 23° or
W=wide 40°

Audette 2 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE brass, SWIVEL brass, BODY brass, RING brass	BASE black, SWIVEL black, BODY black, RING black	BASE white, SWIVEL white, BODY white, RING white	BASE gunmetal, SWIVEL gunmetal, BODY gunmetal, RING gunmetal	BASE bronze, SWIVEL bronze, BODY bronze, RING bronze	BASE nickel, SWIVEL nickel, BODY nickel, RING nickel
	2700K	LC	ADRT 223333◆					
	2700K	LC		ADRT 222222◆	ADRT 221111◆			
	2700K	LC				ADRT 224444◆	ADRT 227777◆	ADRT 229999◆
	3000K	LC	ADRT 233333◆					
	3000K	LC		ADRT 232222◆	ADRT 231111◆			
	3000K	LC				ADRT 234444◆	ADRT 237777◆	ADRT 239999◆
+ honeycomb	2700K	LC	ADRT 223333H◆					
+ honeycomb	2700K	LC		ADRT 222222H◆	ADRT 221111H◆			
+ honeycomb	2700K	LC				ADRT 224444H◆	ADRT 227777H◆	ADRT 229999H◆
+ honeycomb	3000K	LC	ADRT 233333H◆					
+ honeycomb	3000K	LC		ADRT 232222H◆	ADRT 231111H◆			
+ honeycomb	3000K	LC				ADRT 234444H◆	ADRT 237777H◆	ADRT 239999H◆




◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette 3 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable or** DA **(DALI) dimmable**
3 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (3 x 633lm) or 3000K (3 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black ●	SWIVEL brass ◐	BODY brass ◐	RING brass ◐	BASE white ○	SWIVEL brass ◐	BODY brass ◐	RING brass ◐	BASE black ●	SWIVEL black ●	BODY black ●	RING black ●	BASE white ○	SWIVEL white ○	BODY white ○	RING white ○
2700K	LC		ADST 322333◆				ADST 321333◆											
2700K	DA		ADSD 322333◆				ADSD 321333◆											
2700K	LC										ADST 322222◆				ADST 321111◆			
2700K	DA										ADSD 322222◆				ADSD 321111◆			
3000K	LC		ADST 332333◆				ADST 331333◆											
3000K	DA		ADSD 332333◆				ADSD 331333◆											
3000K	LC										ADST 332222◆				ADST 331111◆			
3000K	DA										ADSD 332222◆				ADSD 331111◆			
+ honeycomb	**2700K**	LC	ADST 322333H◆				ADST 321333H◆											
+ honeycomb	**2700K**	DA	ADSD 322333H◆				ADSD 321333H◆											
+ honeycomb	**2700K**	LC									ADST 322222H◆				ADST 321111H◆			
+ honeycomb	**2700K**	DA									ADSD 322222H◆				ADSD 321111H◆			
+ honeycomb	**3000K**	LC	ADST 332333H◆				ADST 331333H◆											
+ honeycomb	**3000K**	DA	ADSD 332333H◆				ADSD 331333H◆											
+ honeycomb	**3000K**	LC									ADST 332222H◆				ADST 331111H◆			
+ honeycomb	**3000K**	DA									ADSD 332222H◆				ADSD 331111H◆			




◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette 4 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable or** DA **(DALI) dimmable**
4 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (4 x 633lm) or 3000K (4 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black ●	SWIVEL brass ◐	BODY brass ◐	RING brass ◐	BASE white ○	SWIVEL brass ◐	BODY brass ◐	RING brass ◐	BASE black ●	SWIVEL black ●	BODY black ●	RING black ●	BASE white ○	SWIVEL white ○	BODY white ○	RING white ○
2700K	LC		ADST 422333◆				ADST 421333◆											
2700K	DA		ADSD 422333◆				ADSD 421333◆											
2700K	LC										ADST 422222◆				ADST 421111◆			
2700K	DA										ADSD 422222◆				ADSD 421111◆			
3000K	LC		ADST 432333◆				ADST 431333◆											
3000K	DA		ADSD 432333◆				ADSD 431333◆											
3000K	LC										ADST 432222◆				ADST 431111◆			
3000K	DA										ADSD 432222◆				ADSD 431111◆			
+ honeycomb	**2700K**	LC	ADST 422333H◆				ADST 421333H◆											
+ honeycomb	**2700K**	DA	ADSD 422333H◆				ADSD 421333H◆											
+ honeycomb	**2700K**	LC									ADST 422222H◆				ADST 421111H◆			
+ honeycomb	**2700K**	DA									ADSD 422222H◆				ADSD 421111H◆			
+ honeycomb	**3000K**	LC	ADST 432333H◆				ADST 431333H◆											
+ honeycomb	**3000K**	DA	ADSD 432333H◆				ADSD 431333H◆											
+ honeycomb	**3000K**	LC									ADST 432222H◆				ADST 431111H◆			
+ honeycomb	**3000K**	DA									ADSD 432222H◆				ADSD 431111H◆			



Choose beam:
M=medium 23° or
W=wide 40°

Audette C1 in Rounded

350mA - **required remote mounted driver see below**
1 x LED array 6,25W (LED incl.) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



		COVER brass	SWIVEL brass	BODY brass	RING brass	COVER black	SWIVEL black	BODY black	RING black	COVER white	SWIVEL white	BODY white	RING white	COVER gunmetal	SWIVEL gunmetal	BODY gunmetal	RING gunmetal	COVER bronze	SWIVEL bronze	BODY bronze	RING bronze	COVER nickel	SWIVEL nickel	BODY nickel	RING nickel
2700K		ADCI 23333◆																							
2700K						ADCI 22222◆				ADCI 21111◆															
2700K														ADCI 24444◆				ADCI 27777◆				ADCI 29999◆			
3000K		ADCI 33333◆																							
3000K						ADCI 32222◆				ADCI 31111◆															
3000K														ADCI 34444◆				ADCI 37777◆				ADCI 39999◆			
+ honeycomb	**2700K**	ADCI 23333H◆																							
+ honeycomb	**2700K**					ADCI 22222H◆				ADCI 21111H◆															
+ honeycomb	**2700K**													ADCI 24444H◆				ADCI 27777H◆				ADCI 29999H◆			
+ honeycomb	**3000K**	ADCI 33333H◆																							
+ honeycomb	**3000K**					ADCI 32222H◆				ADCI 31111H◆															
+ honeycomb	**3000K**													ADCI 34444H◆				ADCI 37777H◆				ADCI 39999H◆			

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette C2 in Rounded

350mA - **required remote mounted driver see below**
2 x LED array 6,25W (LED incl.) - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		COVER brass	SWIVEL brass	BODY brass	RING brass	COVER black	SWIVEL black	BODY black	RING black	COVER white	SWIVEL white	BODY white	RING white	COVER gunmetal	SWIVEL gunmetal	BODY gunmetal	RING gunmetal	COVER bronze	SWIVEL bronze	BODY bronze	RING bronze	COVER nickel	SWIVEL nickel	BODY nickel	RING nickel
	2700K	ADCD 23333◆																							
	2700K					ADCD 22222◆				ADCD 21111◆															
	2700K													ADCD 24444◆				ADCD 27777◆				ADCD 29999◆			
	3000K	ADCD 33333◆																							
	3000K					ADCD 32222◆				ADCD 31111◆															
	3000K													ADCD 34444◆				ADCD 37777◆				ADCD 39999◆			
+ honeycomb	**2700K**	ADCD 23333H◆																							
+ honeycomb	**2700K**					ADCD 22222H◆				ADCD 21111H◆															
+ honeycomb	**2700K**													ADCD 24444H◆				ADCD 27777H◆				ADCD 29999H◆			
+ honeycomb	**3000K**	ADCD 33333H◆																							
+ honeycomb	**3000K**					ADCD 32222H◆				ADCD 31111H◆															
+ honeycomb	**3000K**													ADCD 34444H◆				ADCD 37777H◆				ADCD 39999H◆			

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Choose beam:
M=medium 23° or
W=wide 40°


Audette R6

350mA - required driver see below
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
materials: brass, aluminium
CEILING - IP50



COVER brass	ROD + SWIVEL brass	BODY brass	RING brass	COVER black	ROD + SWIVEL black	BODY black	RING black	COVER white	ROD + SWIVEL white	BODY white	RING white	COVER gunmetal	ROD + SWIVEL gunmetal	BODY gunmetal	RING gunmetal	COVER bronze	ROD + SWIVEL bronze	BODY bronze	RING bronze	COVER nickel	ROD + SWIVEL nickel	BODY nickel	RING nickel
●	●	●	●	●	●	●	●	○	○	○	○	●	●	●	●	●	●	●	●	●	●	●	●

FALSE ceiling



2700K	ADFC R6 2333◆										
2700K			ADFC R6 2222◆		ADFC R6 2111◆						
2700K							ADFC R6 2444◆		ADFC R6 2777◆		ADFC R6 2999◆
3000K	ADFC R6 3333◆										
3000K			ADFC R6 3222◆		ADFC R6 3111◆						
3000K							ADFC R6 3444◆		ADFC R6 3777◆		ADFC R6 3999◆
+ honeycomb 2700K	ADFC R6 2333H◆										
+ honeycomb 2700K			ADFC R6 2222H◆		ADFC R6 2111H◆						
+ honeycomb 2700K							ADFC R6 2444H◆		ADFC R6 2777H◆		ADFC R6 2999H◆
+ honeycomb 3000K	ADFC R6 3333H◆										
+ honeycomb 3000K			ADFC R6 3222H◆		ADFC R6 3111H◆						
+ honeycomb 3000K							ADFC R6 3444H◆		ADFC R6 3777H◆		ADFC R6 3999H◆

CONCRETE ceiling




2700K	ADCC R6 2333◆										
2700K			ADCC R6 2222◆		ADCC R6 2111◆						
2700K							ADCC R6 2444◆		ADCC R6 2777◆		ADCC R6 2999◆
3000K	ADCC R6 3333◆										
3000K			ADCC R6 3222◆		ADCC R6 3111◆						
3000K							ADCC R6 3444◆		ADCC R6 3777◆		ADCC R6 3999◆
+ honeycomb 2700K	ADCC R6 2333H◆										
+ honeycomb 2700K			ADCC R6 2222H◆		ADCC R6 2111H◆						
+ honeycomb 2700K							ADCC R6 2444H◆		ADCC R6 2777H◆		ADCC R6 2999H◆
+ honeycomb 3000K	ADCC R6 3333H◆										
+ honeycomb 3000K			ADCC R6 3222H◆		ADCC R6 3111H◆						
+ honeycomb 3000K							ADCC R6 3444H◆		ADCC R6 3777H◆		ADCC R6 3999H◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Choose beam:
M=medium 23° or
W=wide 40°

Audette-Duo in

350mA - **required driver see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
materials: brass, aluminium
CEILING - IP50



FALSE ceiling



		COVER brass	SWIVEL brass	BODY brass	RING black	COVER brass	SWIVEL brass	BODY brass	RING white	COVER black	SWIVEL black	BODY black	RING brass	COVER white	SWIVEL white	BODY white	RING brass
	2700K	ADFCD 2332◆				ADFCD 2331◆											
	2700K									ADFCD 2223◆				ADFCD 2113◆			
	3000K	ADFCD 3332◆				ADFCD 3331◆											
	3000K									ADFCD 3223◆				ADFCD 3113◆			
+ honeycomb	2700K	ADFCD 2332H◆				ADFCD 2331H◆											
+ honeycomb	2700K									ADFCD 2223H◆				ADFCD 2113H◆			
+ honeycomb	3000K	ADFCD 3332H◆				ADFCD 3331H◆											
+ honeycomb	3000K									ADFCD 3223H◆				ADFCD 3113H◆			

CONCRETE ceiling



	2700K	ADCCD 2332◆				ADCCD 2331◆											
	2700K									ADCCD 2223◆				ADCCD 2113◆			
	3000K	ADCCD 3332◆				ADCC 3331◆											
	3000K									ADCCD 3223◆				ADCCD 3113◆			
+ honeycomb	2700K	ADCCD 2332H◆				ADCCD 2331H◆											
+ honeycomb	2700K									ADCCD 2223H◆				ADCCD 2113H◆			
+ honeycomb	3000K	ADCCD 3332H◆				ADCCD 3331H◆											
+ honeycomb	3000K									ADCCD 3223H◆				ADCCD 3113H◆			


REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**


gunmetal, bronze and **nickel** combinations on demand



Choose beam:
M=medium 23° or
W=wide 40°


Audette-Duo 1 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



		DIM	BASE black, SWIVEL brass, BODY brass, RING black	BASE white, SWIVEL brass, BODY brass, RING white	BASE black, SWIVEL black, BODY black, RING brass	BASE white, SWIVEL white, BODY white, RING brass
	2700K	LC	ADST 122332◆	ADST 121331◆		
	2700K	LC			ADST 122223◆	ADST 121113◆
	3000K	LC	ADST 132332◆	ADST 131331◆		
	3000K	LC			ADST 132223◆	ADST 131113◆
+ honeycomb	2700K	LC	ADST 122332H◆	ADST 121331H◆		
+ honeycomb	2700K	LC			ADST 122223H◆	ADST 121113H◆
+ honeycomb	3000K	LC	ADST 132332H◆	ADST 131331H◆		
+ honeycomb	3000K	LC			ADST 132223H◆	ADST 131113H◆


gunmetal, bronze and **nickel** combinations on demand



Choose beam:
M=medium 23° or
W=wide 40°


Audette-Duo 1 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



		DIM	BASE brass, SWIVEL brass, BODY brass, RING black	BASE brass, SWIVEL brass, BODY brass, RING white	BASE black, SWIVEL black, BODY black, RING brass	BASE white, SWIVEL white, BODY white, RING brass	BASE black, SWIVEL brass, BODY brass, RING black	BASE white, SWIVEL brass, BODY brass, RING white
	2700K	LC	ADRT 123332◆	ADRT 123331◆				
	2700K	LC			ADRT 122223◆	ADRT 121113◆		
	2700K	LC					ADRT 122332◆	ADRT 121331◆
	3000K	LC	ADRT 133332◆	ADRT 133331◆				
	3000K	LC			ADRT 132223◆	ADRT 131113◆		
	3000K	LC					ADRT 132332◆	ADRT 131331◆
+ honeycomb	2700K	LC	ADRT 123332H◆	ADRT 123331H◆				
+ honeycomb	2700K	LC			ADRT 122223H◆	ADRT 121113H◆		
+ honeycomb	2700K	LC					ADRT 122332H◆	ADRT 121331H◆
+ honeycomb	3000K	LC	ADRT 133332H◆	ADRT 133331H◆				
+ honeycomb	3000K	LC			ADRT 132223H◆	ADRT 131113H◆		
+ honeycomb	3000K	LC					ADRT 132332H◆	ADRT 131331H◆


gunmetal, bronze and **nickel** combinations on demand



Choose beam:
M=medium 23° or
W=wide 40°


Audette-Duo 2 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



		DIM	BASE black, SWIVEL brass, BODY brass, RING black	BASE white, SWIVEL brass, BODY brass, RING white	BASE black, SWIVEL black, BODY black, RING brass	BASE white, SWIVEL white, BODY white, RING brass
	2700K	LC	ADST 222332◆	ADST 221331◆		
	2700K	LC			ADST 222223◆	ADST 221113◆
	3000K	LC	ADST 232332◆	ADST 231331◆		
	3000K	LC			ADST 232223◆	ADST 231113◆
+ honeycomb	2700K	LC	ADST 222332H◆	ADST 221331H◆		
+ honeycomb	2700K	LC			ADST 222223H◆	ADST 221113H◆
+ honeycomb	3000K	LC	ADST 232332H◆	ADST 231331H◆		
+ honeycomb	3000K	LC			ADST 232223H◆	ADST 231113H◆


gunmetal, bronze and **nickel** combinations on demand



Choose beam:
M=medium 23° or
W=wide 40°


Audette-Duo 2 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



		DIM	BASE brass, SWIVEL brass, BODY brass, RING black	BASE brass, SWIVEL brass, BODY brass, RING white	BASE black, SWIVEL black, BODY black, RING brass	BASE white, SWIVEL white, BODY white, RING brass	BASE black, SWIVEL brass, BODY brass, RING black	BASE white, SWIVEL brass, BODY brass, RING white
	2700K	LC	ADRT 223332◆	ADRT 223331◆				
	2700K	LC			ADRT 222223◆	ADRT 221113◆		
	2700K	LC					ADRT 222332◆	ADRT 221331◆
	3000K	LC	ADRT 233332◆	ADRT 233331◆				
	3000K	LC			ADRT 232223◆	ADRT 231113◆		
	3000K	LC					ADRT 232332◆	ADRT 231331◆
+ honeycomb	2700K	LC	ADRT 223332H◆	ADRT 223331H◆				
+ honeycomb	2700K	LC			ADRT 222223H◆	ADRT 221113H◆		
+ honeycomb	2700K	LC					ADRT 222332H◆	ADRT 221331H◆
+ honeycomb	3000K	LC	ADRT 233332H◆	ADRT 233331H◆				
+ honeycomb	3000K	LC			ADRT 232223H◆	ADRT 231113H◆		
+ honeycomb	3000K	LC					ADRT 232332H◆	ADRT 231331H◆


gunmetal, bronze and **nickel** combinations on demand



Choose beam:
M=medium 23° or
W=wide 40°


Audette-Duo 3 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable or** DA **(DALI) dimmable**
3 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (3 x 633lm) or 3000K (3 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black SWIVEL brass BODY brass RING black	BASE white SWIVEL brass BODY brass RING white	BASE black SWIVEL black BODY black RING brass	BASE white SWIVEL white BODY white RING brass
2700K		LC	ADST 322332◆	ADST 321331◆		
2700K		DA	ADSD 322332◆	ADSD 321331◆		
2700K		LC			ADST 322223◆	ADST 321113◆
2700K		DA			ADSD 322223◆	ADSD 321113◆
3000K		LC	ADST 332332◆	ADST 331331◆		
3000K		DA	ADSD 332332◆	ADSD 331331◆		
3000K		LC			ADST 332223◆	ADST 331113◆
3000K		DA			ADSD 332223◆	ADSD 331113◆
+ honeycomb	**2700K**	LC	ADST 322332H◆	ADST 321331H◆		
+ honeycomb	**2700K**	DA	ADSD 322332H◆	ADSD 321331H◆		
+ honeycomb	**2700K**	LC			ADST 322223H◆	ADST 321113H◆
+ honeycomb	**2700K**	DA			ADSD 322223H◆	ADSD 321113H◆
+ honeycomb	**3000K**	LC	ADST 332332H◆	ADST 331331H◆		
+ honeycomb	**3000K**	DA	ADSD 332332H◆	ADSD 331331H◆		
+ honeycomb	**3000K**	LC			ADST 332223H◆	ADST 331113H◆
+ honeycomb	**3000K**	DA			ADSD 332223H◆	ADSD 331113H◆

gunmetal, bronze and **nickel** combinations on demand




Audette-Duo 4 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable or** DA **(DALI) dimmable**
4 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (4 x 633lm) or 3000K (4 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



		DIM	BASE black, SWIVEL brass, BODY brass, RING black	BASE white, SWIVEL brass, BODY brass, RING white	BASE black, SWIVEL black, BODY black, RING brass	BASE white, SWIVEL white, BODY white, RING brass
	2700K	LC	ADST 422332◆	ADST 421331◆		
	2700K	DA	ADSD 422332◆	ADSD 421331◆		
	2700K	LC			ADST 422223◆	ADST 421113◆
	2700K	DA			ADSD 422223◆	ADSD 421113◆
	3000K	LC	ADST 432332◆	ADST 431331◆		
	3000K	DA	ADSD 432332◆	ADSD 431331◆		
	3000K	LC			ADST 432223◆	ADST 431113◆
	3000K	DA			ADSD 432223◆	ADSD 431113◆
+ **honeycomb**	**2700K**	LC	ADST 422332H◆	ADST 421331H◆		
+ **honeycomb**	**2700K**	DA	ADSD 422332H◆	ADSD 421331H◆		
+ **honeycomb**	**2700K**	LC			ADST 422223H◆	ADST 421113H◆
+ **honeycomb**	**2700K**	DA			ADSD 422223H◆	ADSD 431113H◆
+ **honeycomb**	**3000K**	LC	ADST 432332H◆	ADST 431331H◆		
+ **honeycomb**	**3000K**	DA	ADSD 432332H◆	ADSD 431331H◆		
+ **honeycomb**	**3000K**	LC			ADST 432222H◆	ADST 431113H◆
+ **honeycomb**	**3000K**	DA			ADSD 432222H◆	ADSD 431113H◆


gunmetal, bronze and **nickel** combinations on demand



Choose beam:
M=medium 23° or
W=wide 40°

Audette-Duo C1 in Rounded

350mA - **required remote mounted driver see below**
1 x LED array 6,25W (LED incl.) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
WALL - IP50



		COVER brass	SWIVEL brass	BODY brass	RING black	COVER brass	SWIVEL brass	BODY brass	RING white	COVER black	SWIVEL black	BODY black	RING brass	COVER white	SWIVEL white	BODY white	RING brass	COVER black	SWIVEL brass	BODY brass	RING black	COVER white	SWIVEL brass	BODY brass	RING white
2700K		ADCI 23332◆				ADCI 23331◆												ADCI 22332◆				ADCI 21331◆			
2700K										ADCI 22223◆				ADCI 21113◆											
3000K		ADCI 33332◆				ADCI 33331◆																			
3000K										ADCI 32223◆				ADCI 31113◆				ADCI 32332◆				ADCI 31331◆			
+ honeycomb	**2700K**	ADCI 23332H◆				ADCI 23331H◆												ADCI 22332H◆				ADCI 21331H◆			
+ honeycomb	**2700K**									ADCI 22223H◆				ADCI 21113H◆											
+ honeycomb	**3000K**	ADCI 33332H◆				ADCI 33331H◆												ADCI 32332H◆				ADCI 31331H◆			
+ honeycomb	**3000K**									ADCI 32223H◆				ADCI 31113H◆											


REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**


gunmetal, bronze and **nickel** combinations on demand



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette-Duo C2 in Rounded

350mA - **required remote mounted driver see below**
2 x LED array 6,25W (LED incl.) - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



		COVER brass / SWIVEL brass / BODY brass / RING black	COVER brass / SWIVEL brass / BODY brass / RING white	COVER black / SWIVEL black / BODY black / RING brass	COVER white / SWIVEL white / BODY white / RING brass	COVER black / SWIVEL brass / BODY brass / RING black	COVER white / SWIVEL brass / BODY brass / RING white
	2700K	ADCD 23332◆	ADCD 23331◆			ADCD 22332◆	ADCD 21331◆
	2700K			ADCD 22223◆	ADCD 21113◆		
	3000K	ADCD 33332◆	ADCD 33331◆				
	3000K			ADCD 32223◆	ADCD 31113◆	ADCD 32332◆	ADCD 31331◆
+ honeycomb	**2700K**	ADCD 23332H◆	ADCD 23331H◆			ADCD 22332H◆	ADCD 21331H◆
+ honeycomb	**2700K**			ADCD 22223H◆	ADCD 21113H◆		
+ honeycomb	**3000K**	ADCD 33332H◆	ADCD 33331H◆			ADCD 32332H◆	ADCD 31331H◆
+ honeycomb	**3000K**			ADCD 32223H◆	ADCD 31113H◆		


REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**


gunmetal, bronze and **nickel** combinations on demand




◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette-Duo R6

350mA - required driver see below
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
materials: brass, aluminium
CEILING - IP50



		COVER brass ROD & SWIVEL brass BODY brass RING black	COVER brass ROD & SWIVEL brass BODY brass RING white	COVER black ROD & SWIVEL black BODY black RING brass	COVER white ROD & SWIVEL white BODY white RING brass
FALSE ceiling					
	**2700K**	ADFC R6 2332◆	ADFC R6 2331◆		
	2700K			ADFC R6 2223◆	ADFC R6 2113◆
	3000K	ADFC R6 3332◆	ADFC R6 3331◆		
	3000K			ADFC R6 3223◆	ADFC R6 3113◆
+ honeycomb	**2700K**	ADFC R6 2332H◆	ADFC R6 2331H◆		
+ honeycomb	**2700K**			ADFC R6 2223H◆	ADFC R6 2113H◆
+ honeycomb	**3000K**	ADFC R6 3332H◆	ADFC R6 3331H◆		
+ honeycomb	**3000K**			ADFC R6 3223H◆	ADFC R6 3113H◆
CONCRETE ceiling					
	**2700K**	ADCC R6 2332◆	ADCC R6 2331◆		
	2700K			ADCC R6 2223◆	ADCC R6 2113◆
	3000K	ADCC R6 3332◆	ADCC R6 3331◆		
	3000K			ADCC R6 3223◆	ADCC R6 3113◆
+ honeycomb	**2700K**	ADCC R6 2332H◆	ADCC R6 2331H◆		
+ honeycomb	**2700K**			ADCC R6 2223H◆	ADCC R6 2113H◆
+ honeycomb	**3000K**	ADCC R6 3332H◆	ADCC R6 3331H◆		
+ honeycomb	**3000K**			ADCC R6 3223H◆	ADCC R6 3113H◆


REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

gunmetal, bronze and **nickel** combinations on demand



Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié in

350mA - **required driver see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
materials: brass, aluminium
CEILING - IP50



FALSE ceiling



		BASE black / SWIVEL brass / BODY black / RING black	BASE white / SWIVEL brass / BODY white / RING white
	2700K	ADFCD 2232◆	ADFCD 2131◆
	3000K	ADFCD 3232◆	ADFCD 3131◆
+ honeycomb	**2700K**	ADFCD 2232H◆	ADFCD 2131H◆
+ honeycomb	**3000K**	ADFCD 3232H◆	ADFCD 3131H◆

CONCRETE ceiling



		BASE black / SWIVEL brass / BODY black / RING black	BASE white / SWIVEL brass / BODY white / RING white
	2700K	ADCCD 2232◆	ADCCD 2131◆
	3000K	ADCCD 3232◆	ADCCD 3131◆
+ honeycomb	**2700K**	ADCCD 2232H◆	ADCCD 2131H◆
+ honeycomb	**3000K**	ADCCD 3232H◆	ADCCD 3131H◆


REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**


gunmetal, bronze and **nickel** combinations on demand




Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié 1 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black	SWIVEL brass	BODY black	RING black	BASE white	SWIVEL brass	BODY white	RING white
	2700K	LC	ADST 122322◆				ADST 121311◆			
	3000K	LC	ADST 132322◆				ADST 131311◆			
+ honeycomb	2700K	LC	ADST 122322H◆				ADST 121311H◆			
+ honeycomb	3000K	LC	ADST 132322H◆				ADST 131311H◆			




Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié 1 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black	SWIVEL brass	BODY black	RING black	BASE white	SWIVEL brass	BODY white	RING white
	2700K	LC	ADRT 122322◆				ADRT 121311◆			
	3000K	LC	ADRT 132322◆				ADRT 131311◆			
+ honeycomb	2700K	LC	ADRT 122322H◆				ADRT 121311H◆			
+ honeycomb	3000K	LC	ADRT 132322H◆				ADRT 131311H◆			




Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié 2 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black	SWIVEL brass	BODY black	RING black	BASE white	SWIVEL brass	BODY white	RING white
	2700K	LC	ADST 222322◆				ADST 221311◆			
	3000K	LC	ADST 232322◆				ADST 231311◆			
+ honeycomb	2700K	LC	ADST 222322H◆				ADST 221311H◆			
+ honeycomb	3000K	LC	ADST 232322H◆				ADST 231311H◆			




◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié 2 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black	SWIVEL brass	BODY black	RING black	BASE white	SWIVEL brass	BODY white	RING white
	2700K	LC	ADRT 222322◆				ADRT 221311◆			
	3000K	LC	ADRT 232322◆				ADRT 231311◆			
+ honeycomb	**2700K**	LC	ADRT 222322H◆				ADRT 221311H◆			
+ honeycomb	**3000K**	LC	ADRT 232322H◆				ADRT 231311H◆			




◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié 3 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable or** DA **(DALI) dimmable**
3 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (3 x 633lm) or 3000K (3 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		DIM	BASE black	SWIVEL brass	BODY black	RING black	BASE white	SWIVEL brass	BODY white	RING white
	2700K	LC	ADST 322322◆				ADST 321311◆			
	2700K	DA	ADSD 322322◆				ADSD 321311◆			
	3000K	LC	ADST 332322◆				ADST 331311◆			
	3000K	DA	ADSD 332322◆				ADSD 331311◆			
+ honeycomb	**2700K**	LC	ADST 322322H◆				ADST 321311H◆			
+ honeycomb	**2700K**	DA	ADSD 322322H◆				ADSD 321311H◆			
+ honeycomb	**3000K**	LC	ADST 332322H◆				ADST 331311H◆			
+ honeycomb	**3000K**	DA	ADSD 332322H◆				ADSD 331311H◆			



Audette-Varié 4 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable or** DA **(DALI) dimmable**
4 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (4 x 633lm) or 3000K (4 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




	DIM	BASE black	SWIVEL brass	BODY black	RING black	BASE white	SWIVEL brass	BODY white	RING white
2700K	LC	ADST 422322◆				ADST 421311◆			
2700K	DA	ADSD 422322◆				ADSD 421311◆			
3000K	LC	ADST 432322◆				ADST 431311◆			
3000K	DA	ADSD 432322◆				ADSD 431311◆			
+ honeycomb **2700K**	LC	ADST 422322H◆				ADST 421311H◆			
+ honeycomb **2700K**	DA	ADSD 422322H◆				ADSD 421311H◆			
+ honeycomb **3000K**	LC	ADST 432322H◆				ADST 431311H◆			
+ honeycomb **3000K**	DA	ADSD 432322H◆				ADSD 431311H◆			



Audette-Varié C1 in Rounded

350mA - **required remote mounted driver see below**
1 x LED array 6,25W (LED incl.) - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



	COVER black	SWIVEL brass	BODY black	RING black	COVER white	SWIVEL brass	BODY white	RING white
2700K	ADCI 22322◆				ADCI 21311◆			
3000K	ADCI 32322◆				ADCI 31311◆			
+ honeycomb **2700K**	ADCI 22322H◆				ADCI 21311H◆			
+ honeycomb **3000K**	ADCI 32322H◆				ADCI 31311H◆			

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.
1 x	LC **(TRIAC/IGBT)**
2 x	LC **(TRIAC/IGBT)**
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**
1-2 x	DA **(DALI)**
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**

DRIVER	VOLT
D 6WT	230V
D 18WT	230V
D 15WP	110V-230V
D 15WDA EU	230V
D 15WDA EU-US	110V-230V
D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié C2 in Rounded

350mA - required remote mounted driver see below
2 x LED array 6,25W (LED incl.) - 350mA - 2700K (2 x 633lm) or 3000K (2 x 673lm) - CRI >95
materials: brass, aluminium
CEILING - IP50




		COVER black	SWIVEL brass	BODY black	RING black	COVER white	SWIVEL brass	BODY white	RING white
	2700K	ADCD 22322◆				ADCD 21311◆			
	3000K	ADCD 32322◆				ADCD 31311◆			
+ honeycomb	**2700K**	ADCD 22322H◆				ADCD 21311H◆			
+ honeycomb	**3000K**	ADCD 32322H◆				ADCD 31311H◆			

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Choose beam:
M=medium 23° or
W=wide 40°

Audinni

500mA - **required driver see below**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
*__FALSE ceiling=__ aperture: Ø41 - depth: min. 100mm (driver in ceiling) / depth: min. 70mm (driver remote)
*__CONCRETE ceiling=__ aperture: Ø41 - depth: min. 120mm (driver remote)
materials: brass, aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING** - **IP50**

		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
FALSE ceiling	**2700K**	AUIF 1273◆					
	**2700K**		AUIF 1272◆	AUIF 1271◆			
	2700K				AUIF 1274◆	AUIF 1277◆	AUIF 1279◆
	3000K	AUIF 1303◆					
	3000K		AUIF 1302◆	AUIF 1301◆			
	3000K				AUIF 1304◆	AUIF 1307◆	AUIF 1309◆
+ honeycomb	**2700K**	AUIF 1273H◆					
+ honeycomb	**2700K**		AUIF 1272H◆	AUIF 1271H◆			
+ honeycomb	**2700K**				AUIF 1274H◆	AUIF 1277H◆	AUIF 1279H◆
+ honeycomb	**3000K**	AUIF 1303H◆					
+ honeycomb	**3000K**		AUIF 1302H◆	AUIF 1301H◆			
+ honeycomb	**3000K**				AUIF 1304H◆	AUIF 1307H◆	AUIF 1309H◆
CONCRETE ceiling	**2700K**	AUIC 1273◆					
	**2700K**		AUIC 1272◆	AUIC 1271◆			
	2700K				AUIC 1274◆	AUIC 1277◆	AUIC 1279◆
	3000K	AUIC 1303◆					
	3000K		AUIC 1302◆	AUIC 1301◆			
	3000K				AUIC 1304◆	AUIC 1307◆	AUIC 1309◆
+ honeycomb	**2700K**	AUIC 1273H◆					
+ honeycomb	**2700K**		AUIC 1272H◆	AUIC 1271H◆			
+ honeycomb	**2700K**				AUIC 1274H◆	AUIC 1277H◆	AUIC 1279H◆
+ honeycomb	**3000K**	AUIC 1303H◆					
+ honeycomb	**3000K**		AUIC 1302H◆	AUIC 1301H◆			
+ honeycomb	**3000K**				AUIC 1304H◆	AUIC 1307H◆	AUIC 1309H◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-4 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audinno

350mA - required driver see below
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
***FALSE ceiling=** aperture: Ø41 - depth: min. 150mm (driver in ceiling) / depth: min. 110mm (driver remote)
***CONCRETE ceiling=** aperture: Ø41 - depth: min. 160mm (driver remote)
materials: brass, aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING** - **IP50**

FALSE ceiling



		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
	2700K	AUOF 1273◆					
	2700K		AUOF 1272◆	AUOF 1271◆			
	2700K				AUOF 1274◆	AUOF 1277◆	AUOF 1279◆
	3000K	AUOF 1303◆					
	3000K		AUOF 1302◆	AUOF 1301◆			
	3000K				AUOF 1304◆	AUOF 1307◆	AUOF 1309◆
+ honeycomb	2700K	AUOF 1273H◆					
+ honeycomb	2700K		AUOF 1272H◆	AUOF 1271H◆			
+ honeycomb	2700K				AUOF 1274H◆	AUOF 1277H◆	AUOF 1279H◆
+ honeycomb	3000K	AUOF 1303H◆					
+ honeycomb	3000K		AUOF 1302H◆	AUOF 1301H◆			
+ honeycomb	3000K				AUOF 1304H◆	AUOF 1307H◆	AUOF 1309H◆

CONCRETE ceiling




	2700K	AUOC 1273◆					
	2700K		AUOC 1272◆	AUOC 1271◆			
	2700K				AUOC 1274◆	AUOC 1277◆	AUOC 1279◆
	3000K	AUOC 1303◆					
	3000K		AUOC 1302◆	AUOC 1301◆			
	3000K				AUOC 1304◆	AUOC 1307◆	AUOC 1309◆
+ honeycomb	2700K	AUOC 1273H◆					
+ honeycomb	2700K		AUOC 1272H◆	AUOC 1271H◆			
+ honeycomb	2700K				AUOC 1274H◆	AUOC 1277H◆	AUOC 1279H◆
+ honeycomb	3000K	AUOC 1303H◆					
+ honeycomb	3000K		AUOC 1302H◆	AUOC 1301H◆			
+ honeycomb	3000K				AUOC 1304H◆	AUOC 1307H◆	AUOC 1309H◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Choose beam:
M=medium 23° or
W=wide 40°

Audy-In

350mA - **required driver see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
***FALSE ceiling=** aperture: Ø47 - depth: min. 70mm (driver in ceiling) / depth: min. 40mm (driver remote)
***CONCRETE ceiling=** aperture: Ø47 - depth: min. 90mm (driver remote)
materials: brass, aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP50**

FALSE & CONCRETE ceiling




		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
	2700K	AUDY 1273◆	AUDY 1272◆	AUDY 1271◆			
	2700K				AUDY 1274◆	AUDY 1277◆	AUDY 1279◆
	3000K	AUDY 1303◆	AUDY 1302◆	AUDY 1301◆			
	3000K				AUDY 1304◆	AUDY 1307◆	AUDY 1309◆
+ honeycomb	**2700K**	AUDY 1273H◆	AUDY 1272H◆	AUDY 1271H◆			
+ honeycomb	**2700K**				AUDY 1274H◆	AUDY 1277H◆	AUDY 1279H◆
+ honeycomb	**3000K**	AUDY 1303H◆	AUDY 1302H◆	AUDY 1301H◆			
+ honeycomb	**3000K**				AUDY 1304H◆	AUDY 1307H◆	AUDY 1309H◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆ Choose beam:
M=medium 23° or
W=wide 40°

Audy 1 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 4,32W **(LED incl.)** - 350mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
CEILING - IP50

BASE
RING

	DIM	BASE brass / RING brass	BASE black / RING black	BASE white / RING white	BASE gunmetal / RING gunmetal	BASE bronze / RING bronze	BASE nickel / RING nickel
2700K	LC	AYUP 2133◆					
2700K	LC		AYUP 2122◆	AYUP 2111◆			
2700K	LC				AYUP 2144◆	AYUP 2177◆	AYUP 2199◆
3000K	LC	AYUP 3133◆					
3000K	LC		AYUP 3122◆	AYUP 3111◆			
3000K	LC				AYUP 3144◆	AYUP 3177◆	AYUP 3199◆
+ honeycomb **2700K**	LC	AYUP 2133H◆					
+ honeycomb **2700K**	LC		AYUP 2122H◆	AYUP 2111H◆			
+ honeycomb **2700K**	LC				AYUP 2144H◆	AYUP 2177H◆	AYUP 2199H◆
+ honeycomb **3000K**	LC	AYUP 3133H◆					
+ honeycomb **3000K**	LC		AYUP 3122H◆	AYUP 3111H◆			
+ honeycomb **3000K**	LC				AYUP 3144H◆	AYUP 3177H◆	AYUP 3199H◆




◆ Choose beam:
M=medium 23° or
W=wide 40°

Audy 2 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x LED array 4,32W **(LED incl.)** - 350mA - 2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95
materials: brass, aluminium
CEILING - IP50

BASE
RING

	DIM	BASE brass / RING brass	BASE black / RING black	BASE white / RING white	BASE gunmetal / RING gunmetal	BASE bronze / RING bronze	BASE nickel / RING nickel
2700K	LC	AYUP 2233◆					
2700K	LC		AYUP 2222◆	AYUP 2211◆			
2700K	LC				AYUP 2244◆	AYUP 2277◆	AYUP 2299◆
3000K	LC	AYUP 3233◆					
3000K	LC		AYUP 3222◆	AYUP 3211◆			
3000K	LC				AYUP 3244◆	AYUP 3277◆	AYUP 3299◆
+ honeycomb **2700K**	LC	AYUP 2233H◆					
+ honeycomb **2700K**	LC		AYUP 2222H◆	AYUP 2211H◆			
+ honeycomb **2700K**	LC				AYUP 2244H◆	AYUP 2277H◆	AYUP 2299H◆
+ honeycomb **3000K**	LC	AYUP 3233H◆					
+ honeycomb **3000K**	LC		AYUP 3222H◆	AYUP 3211H◆			
+ honeycomb **3000K**	LC				AYUP 3244H◆	AYUP 3277H◆	AYUP 3299H◆



◆ Choose beam:
M=medium 23° or
W=wide 40°


Audy-Duo 1 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 4,32W **(LED incl.)** - 350mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



		DIM	BASE brass RING black	BASE brass RING white	BASE black RING brass	BASE white RING brass
	2700K	LC	AYUP 2132◆	AYUP 2131◆		
	2700K	LC			AYUP 2123◆	AYUP 2113◆
	3000K	LC	AYUP 3132◆	AYUP 3131◆		
	3000K	LC			AYUP 3123◆	AYUP 3113◆
+ honeycomb	**2700K**	LC	AYUP 2132H◆	AYUP 2131H◆		
+ honeycomb	**2700K**	LC			AYUP 2123H◆	AYUP 2113H◆
+ honeycomb	**3000K**	LC	AYUP 3132H◆	AYUP 3131H◆		
+ honeycomb	**3000K**	LC			AYUP 3123H◆	AYUP 3113H◆

gunmetal, bronze and **nickel** combinations on demand



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audy-Duo 2 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x LED array 4,32W **(LED incl.)** - 350mA - 2700K 2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95
materials: brass, aluminium
CEILING - IP50



		DIM	BASE brass RING black	BASE brass RING white	BASE black RING brass	BASE white RING brass
	2700K	LC	AYUP 2232◆	AYUP 2231◆		
	2700K	LC			AYUP 2223◆	AYUP 2213◆
	3000K	LC	AYUP 3232◆	AYUP 3231◆		
	3000K	LC			AYUP 3223◆	AYUP 3213◆
+ honeycomb	**2700K**	LC	AYUP 2232H◆	AYUP 2231H◆		
+ honeycomb	**2700K**	LC			AYUP 2223H◆	AYUP 2213H◆
+ honeycomb	**3000K**	LC	AYUP 3232H◆	AYUP 3231H◆		
+ honeycomb	**3000K**	LC			AYUP 3223H◆	AYUP 3213H◆

gunmetal, bronze and **nickel** combinations on demand



Austin

350mA - **required driver see below**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
material: brass
CEILING - IP50

FALSE ceiling



FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
AUIN L003	AUIN L002	AUIN L001	AUIN L004	AUIN L007	AUIN L009

CONCRETE ceiling




FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
ACIN L003	ACIN L002	ACIN L001	ACIN L004	ACIN L007	ACIN L009

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Austin Adjustable

350mA - **required driver see below**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
material: brass
CEILING - IP50

FALSE ceiling



FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
AUAN T003	AUAN T002	AUAN T001	AUAN T004	AUAN T007	AUAN T009

CONCRETE ceiling




FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
ACAN T003	ACAN T002	ACAN T001	ACAN T004	ACAN T007	ACAN T009

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Austin 1 up Adjustable Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
materials: brass, aluminium
CEILING - IP50


DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K LC	AURT T003	AURT T002	AURT T001	AURT T004	AURT T007	AURT T009
2700K LC						



Austin 2 up Adjustable Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x LED array 6W **(LED incl.)** - 350mA - 2 x 634lm - 2700K - CRI >93
materials: brass, aluminium
CEILING - IP50

	DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K	LC	AURT T203	AURT T202	AURT T201			
2700K	LC				AURT T204	AURT T207	AURT T209



Austin C1 in Adjustable Rounded

350mA - **required remote mounted driver see below**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
materials: brass, aluminium
CEILING - IP50

	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K	AUCI T003	AUCI T002	AUCI T001			
2700K				AUCI T004	AUCI T007	AUCI T009

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Austin C2 in Adjustable Rounded

350mA - **required remote mounted driver see below**
2 x LED array 6W **(LED incl.)** - 350mA - 2 x 634lm - 2700K - CRI >93
materials: brass, aluminium
CEILING - IP50

	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K	AUCI T203	AUCI T202	AUCI T201			
2700K				AUCI T204	AUCI T207	AUCI T209

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.
1 x	LC **(TRIAC/IGBT)**
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**
1 x	PU **(PUSH-DIM)** + DA **(DALI)**
1 x	DA **(DALI)**
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**

DRIVER	VOLT
D 18WT	230V
D 15WP	110V-230V
D 15WDA EU	230V
D 15WDA EU-US	110V-230V
D 40WDP	110V-230V


driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

Austere-Elements


DESIGN YOUR OWN UNIQUE COMPOSITION WITH OUR CONFIGURATOR:

www.elements-configurator.trizo21.com

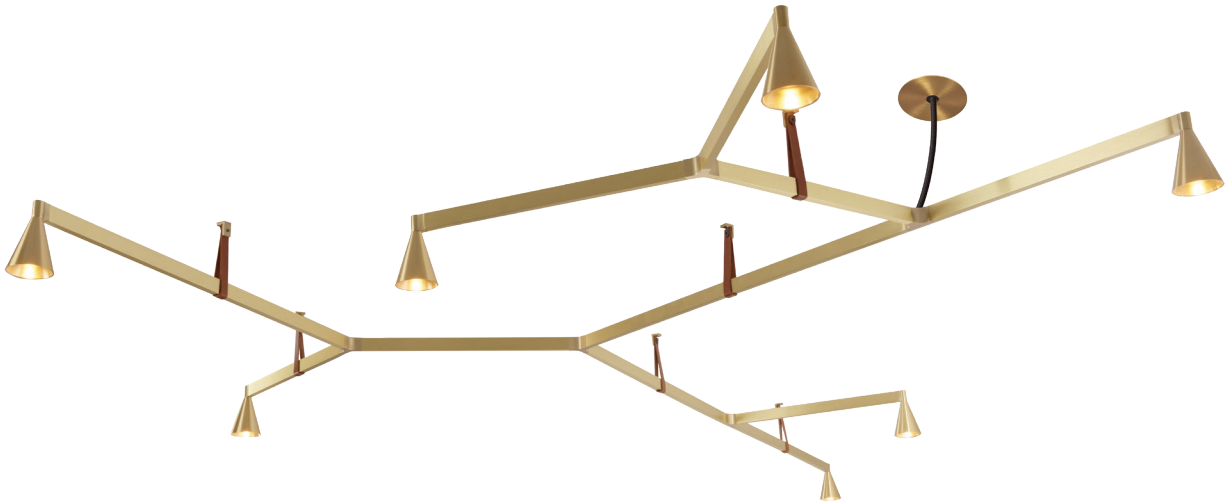

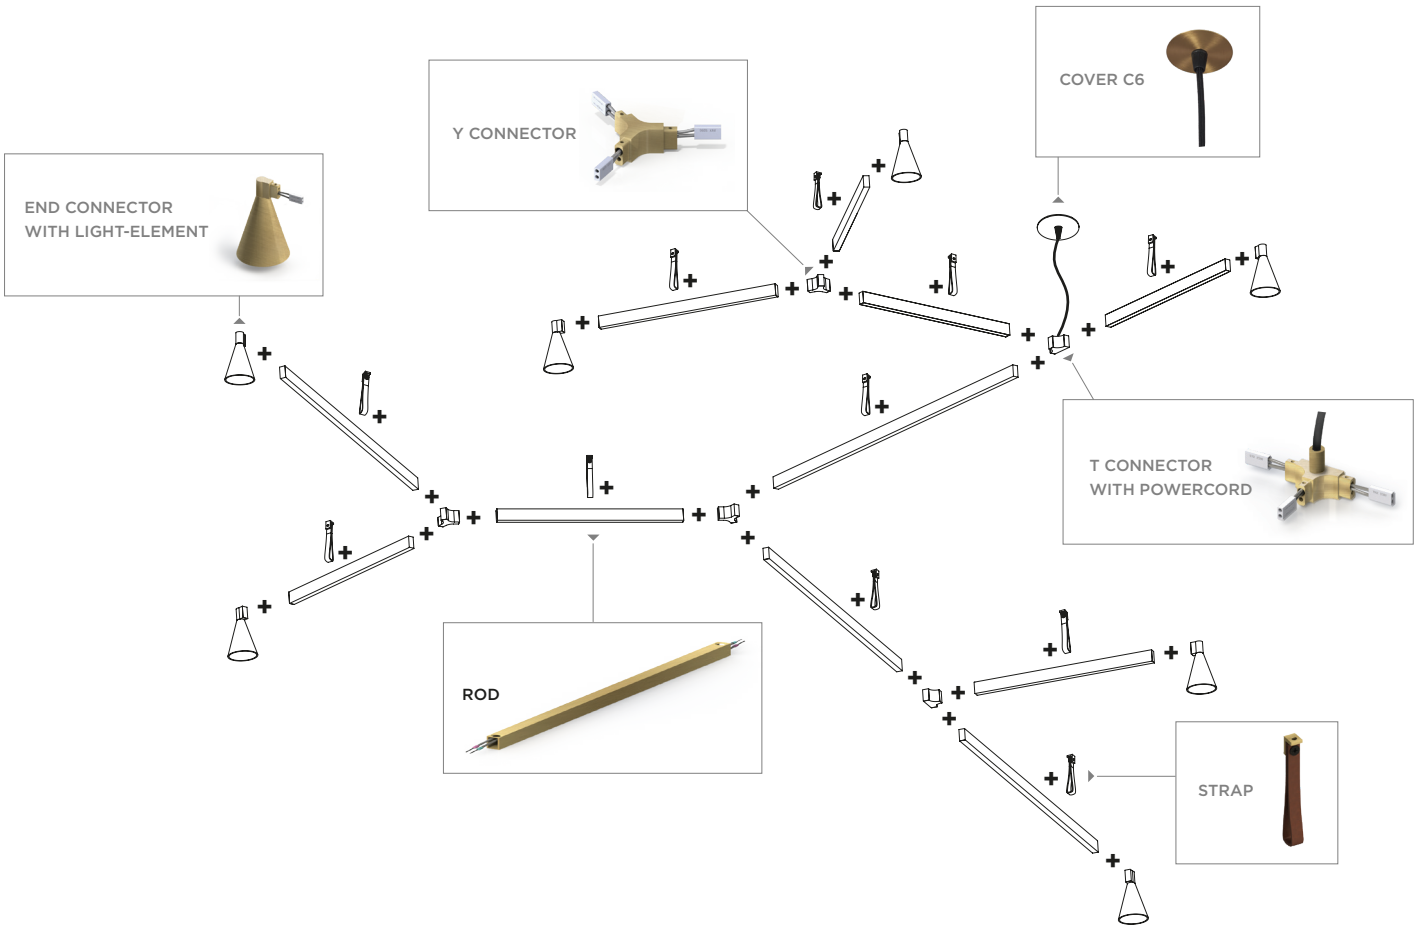

Austere-Elements Configuration °1

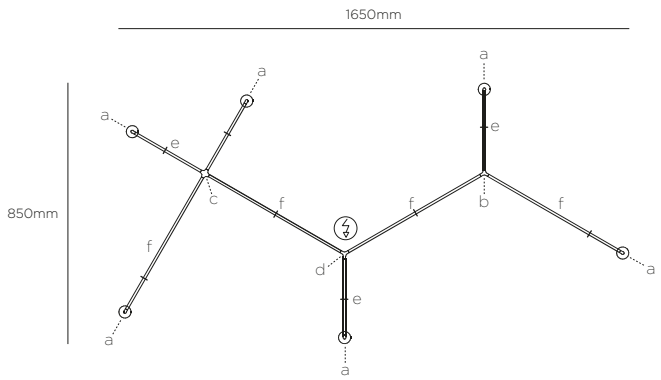


350mA - **driver + base/cover/canopy required** SEE P.62
6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93
material: brass
CEILING - IP50

a:	6x	**END** connector with light-element
b:	1x	**Y** connector
c:	1x	**+** connector
d:	1x	**Y** connector with powercord **L250**
e:	4x	**Austere**-Elements rods **L250**
f:	4x	**Austere**-Elements rods **L500**
–	8x	**Austere**-Elements straps **H93**

FRAME brass, POWERCORD black, LEATHER oak — ELEM 1323
FRAME black, POWERCORD black, LEATHER black — ELEM 1222
FRAME brass, POWERCORD white, LEATHER oak — ELEM 1313
FRAME gunmetal, POWERCORD black, LEATHER black — ELEM 1422
FRAME bronze, POWERCORD black, LEATHER tabacco — ELEM 1727
FRAME nickel, POWERCORD black, LEATHER black — ELEM 1922

Austere-Elements Configuration °2

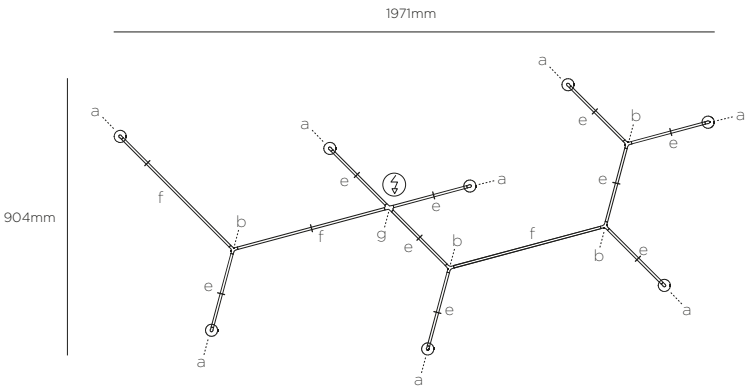


350mA - **driver + base/cover/canopy required** SEE P.62
8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93
material: brass
CEILING - IP50

a:	8x	**END** connector with light-element
b:	4x	**Y** connector
g:	1x	**X** connector with powercord **L250**
e:	9x	**Austere**-Elements rods **L250**
f:	3x	**Austere**-Elements rods **L500**
–	12x	**Austere**-Elements straps **H93**

FRAME brass, POWERCORD black, LEATHER oak — ELEM 2323
FRAME black, POWERCORD black, LEATHER black — ELEM 2222
FRAME brass, POWERCORD white, LEATHER oak — ELEM 2313
FRAME gunmetal, POWERCORD black, LEATHER black — ELEM 2422
FRAME bronze, POWERCORD black, LEATHER tabacco — ELEM 2727
FRAME nickel, POWERCORD black, LEATHER black — ELEM 2922

Austere-Elements Configuration °3

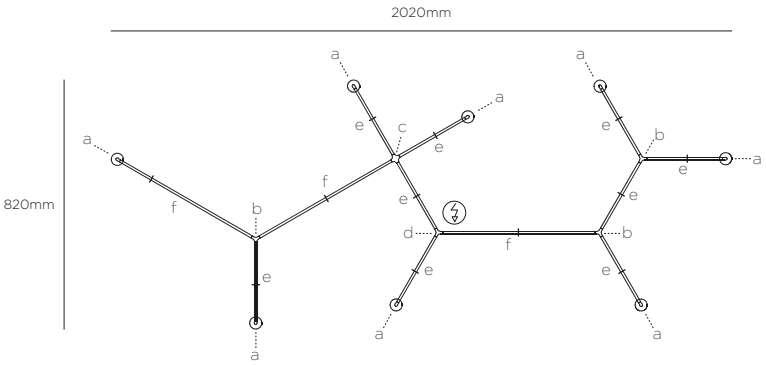


350mA - **driver + base/cover/canopy required** SEE P.62
8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93
material: brass
CEILING - IP50

a:	8x	**END** connector with light-element
b:	3x	**Y** connector
c:	1x	**+** connector
d:	1x	**Y** connector with powercord **L250**
e:	9x	**Austere**-Elements rods **L250**
f:	3x	**Austere**-Elements rods **L500**
–	12x	**Austere**-Elements straps **H93**

FRAME brass · POWERCORD black · LEATHER oak — ELEM 3323
FRAME black · POWERCORD black · LEATHER black — ELEM 3222
FRAME brass · POWERCORD white · LEATHER oak — ELEM 3313
FRAME gunmetal · POWERCORD black · LEATHER black — ELEM 3422
FRAME bronze · POWERCORD black · LEATHER tabacco — ELEM 3727
FRAME nickel · POWERCORD black · LEATHER black — ELEM 3922

Austere-Elements Configuration °4

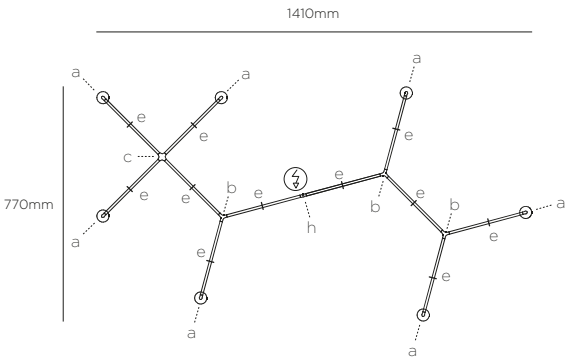


350mA - **driver + base/cover/canopy required** SEE P.62
7 x LED array 6W **(LED incl.)** - 350mA - 7 x 634lm - 2700K - CRI >93
material: brass
CEILING - IP50

a:	7x	**END** connector with light-element
b:	3x	**Y** connector
c:	1x	**+** connector
h:	1x	**-** connector with powercord **L500**
e:	11x	**Austere**-Elements rods **L250**
–	11x	**Austere**-Elements straps **H93**

FRAME brass · POWERCORD black · LEATHER oak — ELEM 4323
FRAME black · POWERCORD black · LEATHER black — ELEM 4222
FRAME brass · POWERCORD white · LEATHER oak — ELEM 4313
FRAME gunmetal · POWERCORD black · LEATHER black — ELEM 4422
FRAME bronze · POWERCORD black · LEATHER tabacco — ELEM 4727
FRAME nickel · POWERCORD black · LEATHER black — ELEM 4922

Austere-Elements Configuration °5

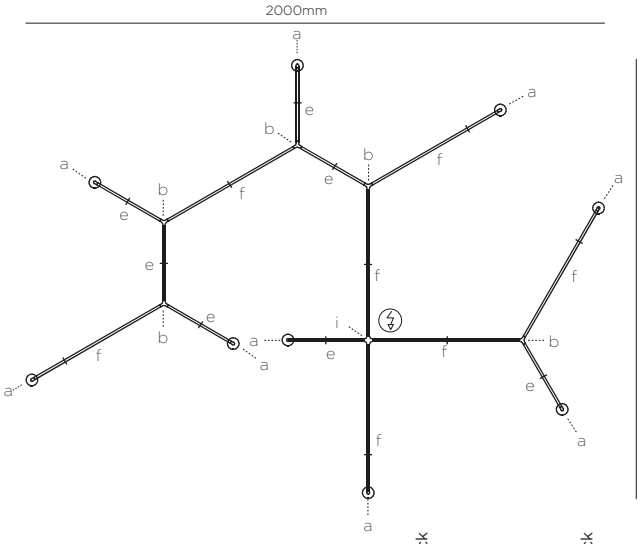


350mA - **driver + base/cover/canopy required** SEE P.62
9 x LED array 6W **(LED incl.)** - 350mA - 9 x 634lm - 2700K - CRI >93
material: brass
CEILING - IP50

a:	9x	**END** connector with light-element
b:	5x	**Y** connector
i:	1x	**+** connector with powercord **L250**
e:	7x	**Austere**-Elements rods **L250**
f:	7x	**Austere**-Elements rods **L500**
–	14x	**Austere**-Elements straps **H93**

FRAME brass POWERCORD black LEATHER oak	FRAME black POWERCORD black LEATHER black	FRAME brass POWERCORD white LEATHER oak	FRAME gunmetal POWERCORD black LEATHER black	FRAME bronze POWERCORD black LEATHER tabacco	FRAME nickel POWERCORD black LEATHER black
ELEM 5323	ELEM 5222	ELEM 5313	ELEM 5422	ELEM 5727	ELEM 5922

Austere-Elements Configuration °6

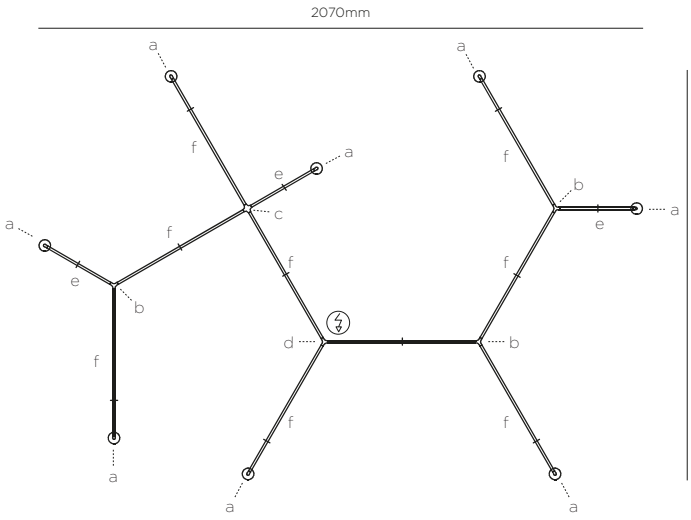


350mA - **driver + base/cover/canopy required** SEE P.62
8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93
material: brass
CEILING - IP50

a:	8x	**END** connector with light-element
b:	3x	**Y** connector
c:	1x	**+** connector
d:	1x	**Y** connector with powercord **L250**
e:	3x	**Austere**-Elements rods **L250**
f:	9x	**Austere**-Elements rods **L500**
–	12x	**Austere**-Elements straps **H93**

FRAME brass POWERCORD black LEATHER oak	FRAME black POWERCORD black LEATHER black	FRAME brass POWERCORD white LEATHER oak	FRAME gunmetal POWERCORD black LEATHER black	FRAME bronze POWERCORD black LEATHER tabacco	FRAME nickel POWERCORD black LEATHER black
ELEM 6323	ELEM 6222	ELEM 6313	ELEM 6422	ELEM 6727	ELEM 6922

Austere-Elements Configuration °7

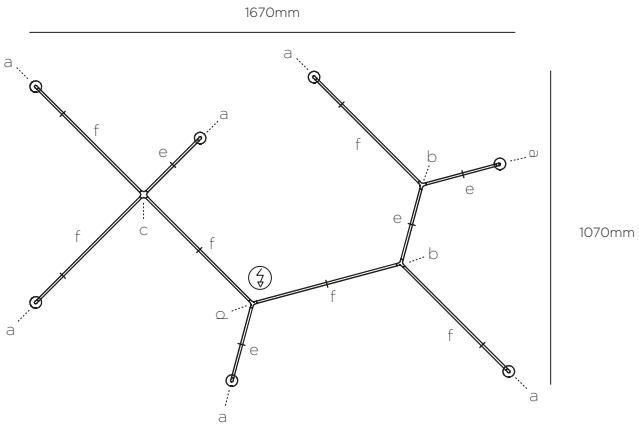


350mA - driver + base/cover/canopy required SEE P.62
7 x LED array 6W **(LED incl.)** - 350mA - 7 x 634lm - 2700K - CRI >93
material: brass
CEILING - IP50

a:	7x	**END** connector with light-element
b:	2x	**Y** connector
c:	1x	**+** connector
d:	1x	**Y** connector with powercord **L250**
e:	4x	**Austere**-Elements rods **L250**
f:	6x	**Austere**-Elements rods **L500**
–	10x	**Austere**-Elements straps **H93**

ELEM 7323	ELEM 7222	ELEM 7313	ELEM 7422	ELEM 7727	ELEM 7922
FRAME brass	FRAME black	FRAME brass	FRAME gunmetal	FRAME bronze	FRAME nickel
POWERCORD black	POWERCORD black	POWERCORD white	POWERCORD black	POWERCORD black	POWERCORD black
LEATHER oak	LEATHER black	LEATHER oak	LEATHER black	LEATHER tabacco	LEATHER black


Austere-Elements Configuration °8

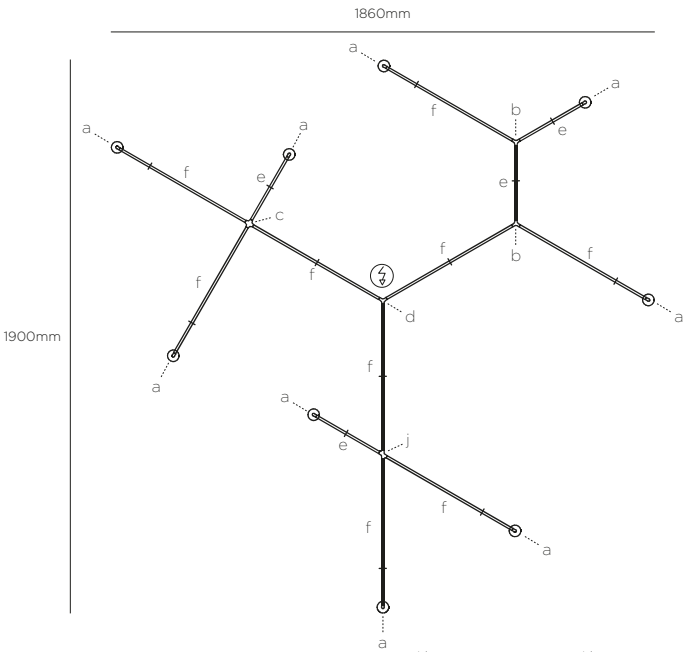

350mA - driver + base/cover/canopy required SEE P.62
9 x LED array 6W **(LED incl.)** - 350mA - 9 x 634lm - 2700K - CRI >93
material: brass
CEILING - IP50

a:	9x	**END** connector with light-element
b:	2x	**Y** connector
c:	1x	**+** connector
j:	1x	**X** connector
d:	1x	**Y** connector with powercord **L250**
e:	4x	**Austere**-Elements rods **L250**
f:	9x	**Austere**-Elements rods **L500**
–	13x	**Austere**-Elements straps **H93**

ELEM 8323	ELEM 8222	ELEM 8313	ELEM 8422	ELEM 8727	ELEM 8922
FRAME brass	FRAME black	FRAME brass	FRAME gunmetal	FRAME bronze	FRAME nickel
POWERCORD black	POWERCORD black	POWERCORD white	POWERCORD black	POWERCORD black	POWERCORD black
LEATHER oak	LEATHER black	LEATHER oak	LEATHER black	LEATHER tabacco	LEATHER black



Austere-Elements Rods

material: brass

LENGTH	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
L 250	HELR 2003	HELR 2002			
L 250			HELR 2004	HELR 2007	HELR 2009
L 500	HELR 5003	HELR 5002			
L 500			HELR 5004	HELR 5007	HELR 5009
L 750	HELR 7003	HELR 7002			
L 750			HELR 7004	HELR 7007	HELR 7009




Austere-Elements Straps H93

materials: brass, leather

FRAME brass / LEATHER oak	FRAME brass / LEATHER black	FRAME brass / LEATHER tabacco	FRAME black / LEATHER oak	FRAME black / LEATHER black	FRAME black / LEATHER tabacco
HELS 0933	HELS 0932	HELS 0937	HELS 0923	HELS 0922	HELS 0927

FRAME gunmetal / LEATHER black	FRAME gunmetal / LEATHER oak	FRAME gunmetal / LEATHER tabacco	FRAME bronze / LEATHER black	FRAME bronze / LEATHER oak	FRAME bronze / LEATHER tabacco
HELS 0942	HELS 0943	HELS 0947	HELS 0972	HELS 0973	HELS 0977

FRAME nickel / LEATHER black	FRAME nickel / LEATHER oak	FRAME nickel / LEATHER tabacco
HELS 0992	HELS 0993	HELS 0997



Austere-Elements Straps Steelcable

materials: brass, leather

LENGTH	FRAME brass LEATHER black STEELCABLE silver	FRAME brass LEATHER oak STEELCABLE silver	FRAME brass LEATHER tabacco STEELCABLE silver	FRAME black LEATHER black STEELCABLE black	FRAME black LEATHER oak STEELCABLE black	FRAME black LEATHER tabacco STEELCABLE black
L 250	HEL**S** 0032	HEL**S** 0033	HEL**S** 0037	HEL**S** 0022	HEL**S** 0023	HEL**S** 0027
L 500	HEL**S** 0532	HEL**S** 0533	HEL**S** 0537	HEL**S** 0522	HEL**S** 0523	HEL**S** 0527
L 1000	HEL**S** 1032	HEL**S** 1033	HEL**S** 1037	HEL**S** 1022	HEL**S** 1023	HEL**S** 1027
L 2000	HEL**S** 2032	HEL**S** 2033	HEL**S** 2037	HEL**S** 2022	HEL**S** 2023	HEL**S** 2027


	FRAME gunmetal LEATHER black STEELCABLE black	FRAME gunmetal LEATHER oak STEELCABLE black	FRAME gunmetal LEATHER tabacco STEELCABLE black	FRAME bronze LEATHER black STEELCABLE black	FRAME bronze LEATHER oak STEELCABLE black	FRAME bronze LEATHER tabacco STEELCABLE black
L 250	HEL**S** 0042	HEL**S** 0043	HEL**S** 0047	HEL**S** 0072	HEL**S** 0073	HEL**S** 0077
L 500	HEL**S** 0542	HEL**S** 0543	HEL**S** 0547	HEL**S** 0572	HEL**S** 0573	HEL**S** 0577
L 1000	HEL**S** 1042	HEL**S** 1043	HEL**S** 1047	HEL**S** 1072	HEL**S** 1073	HEL**S** 1077
L 2000	HEL**S** 2042	HEL**S** 2043	HEL**S** 2047	HEL**S** 2072	HEL**S** 2073	HEL**S** 2077

	FRAME nickel LEATHER black STEELCABLE silver	FRAME nickel LEATHER oak STEELCABLE silver	FRAME nickel LEATHER tabacco STEELCABLE silver
L 250	HEL**S** 0092	HEL**S** 0093	HEL**S** 0097
L 500	HEL**S** 0592	HEL**S** 0593	HEL**S** 0597
L 1000	HEL**S** 1092	HEL**S** 1093	HEL**S** 1097
L 2000	HEL**S** 2092	HEL**S** 2093	HEL**S** 2097

L3000 & 4000mm on demand






Austere-Elements Connectors

material: brass

	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
END connector 16 	HEL**E** 0003	HEL**E** 0002	HEL**E** 0004	HEL**E** 0007	HEL**E** 0009
- connector 16 	HEL**-** 0003	HEL**-** 0002	HEL**-** 0004	HEL**-** 0007	HEL**-** 0009
+ connector 16 	HEL**+** 0003	HEL**+** 0002	HEL**+** 0004	HEL**+** 0007	HEL**+** 0009
Y connector 16 	HEL**Y** 0003	HEL**Y** 0002	HEL**Y** 0004	HEL**Y** 0007	HEL**Y** 0009
T connector 16 	HEL**T** 0003	HEL**T** 0002	HEL**T** 0004	HEL**T** 0007	HEL**T** 0009
X connector 16 	HEL**X** 0003	HEL**X** 0002	HEL**X** 0004	HEL**X** 0007	HEL**X** 0009
90° connector 90° 16 	HEL**90** 0003	HEL**90** 0002	HEL**90** 0004	HEL**90** 0007	HEL**90** 0009
120° connector 120° 16 	HEL**120** 0003	HEL**120** 0002	HEL**120** 0004	HEL**120** 0007	HEL**120** 0009

Austere-Elements Connectors with light-element

350mA - **driver + base/cover/canopy required** SEE P.62
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
material: brass
CEILING - IP50

	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
END connector with light-element 	HEL**E** L003	HEL**E** L002	HEL**E** L004	HEL**E** L007	HEL**E** L009
- connector with light-element 	HEL**-** L003	HEL**-** L002	HEL**-** L004	HEL**-** L007	HEL**-** L009
+ connector with light-element 	HEL**+** L003	HEL**+** L002	HEL**+** L004	HEL**+** L007	HEL**+** L009
Y connector with light-element 	HEL**Y** L003	HEL**Y** L002	HEL**Y** L004	HEL**Y** L007	HEL**Y** L009
T connector with light-element 	HEL**T** L003	HEL**T** L002	HEL**T** L004	HEL**T** L007	HEL**T** L009
X connector with light-element 	HEL**X** L003	HEL**X** L002	HEL**X** L004	HEL**X** L007	HEL**X** L009
90° connector with light-element 	HEL**90** L003	HEL**90** L002	HEL**90** L004	HEL**90** L007	HEL**90** L009
120° connector with light-element 	HEL**120** L003	HEL**120** L002	HEL**120** L004	HEL**120** L007	HEL**120** L009

Austere-Elements Connectors with powercord

material: brass

POWERCORD LENGTH	FRAME brass POWERCORD black	FRAME black POWERCORD black	FRAME brass POWERCORD white	FRAME gunmetal POWERCORD black	FRAME bronze POWERCORD black	FRAME nickel POWERCORD black	FRAME nickel POWERCORD white
END connector with powercord							
L 250	HEC**E** 0023	HEC**E** 0022	HEC**E** 0013				
L 500	HEC**E** 0523	HEC**E** 0522	HEC**E** 0513				
L 1000	HEC**E** 0123	HEC**E** 0122	HEC**E** 0113				
L 2000	HEC**E** 0223	HEC**E** 0222	HEC**E** 0213				
L 250				HEC**E** 0024	HEC**E** 0027	HEC**E** 0029	HEC**E** 0019
L 500				HEC**E** 0524	HEC**E** 0527	HEC**E** 0529	HEC**E** 0519
L 1000				HEC**E** 0124	HEC**E** 0127	HEC**E** 0129	HEC**E** 0119
L 2000				HEC**E** 0224	HEC**E** 0227	HEC**E** 0229	HEC**E** 0219
- connector with powercord							
L 250	HEC**-** 0023	HEC**-** 0022	HEC**-** 0013				
L 500	HEC**-** 0523	HEC**-** 0522	HEC**-** 0513				
L 1000	HEC**-** 0123	HEC**-** 0122	HEC**-** 0113				
L 2000	HEC**-** 0223	HEC**-** 0222	HEC**-** 0213				
L 250				HEC**-** 0024	HEC**-** 0027	HEC**-** 0029	HEC**-** 0019
L 500				HEC**-** 0524	HEC**-** 0527	HEC**-** 0529	HEC**-** 0519
L 1000				HEC**-** 0124	HEC**-** 0127	HEC**-** 0129	HEC**-** 0119
L 2000				HEC**-** 0224	HEC**-** 0227	HEC**-** 0229	HEC**-** 0219
+ connector with powercord							
L 250	HEC**+** 0023	HEC**+** 0022	HEC**+** 0013				
L 500	HEC**+** 0523	HEC**+** 0522	HEC**+** 0513				
L 1000	HEC**+** 0123	HEC**+** 0122	HEC**+** 0113				
L 2000	HEC**+** 0223	HEC**+** 0222	HEC**+** 0213				
L 250				HEC**+** 0024	HEC**+** 0027	HEC**+** 0029	HEC**+** 0019
L 500				HEC**+** 0524	HEC**+** 0527	HEC**+** 0529	HEC**+** 0519
L 1000				HEC**+** 0124	HEC**+** 0127	HEC**+** 0129	HEC**+** 0119
L 2000				HEC**+** 0224	HEC**+** 0227	HEC**+** 0229	HEC**+** 0219
Y connector with powercord							
L 250	HEC**Y** 0023	HEC**Y** 0022	HEC**Y** 0013				
L 500	HEC**Y** 0523	HEC**Y** 0522	HEC**Y** 0513				
L 1000	HEC**Y** 0123	HEC**Y** 0122	HEC**Y** 0113				
L 2000	HEC**Y** 0223	HEC**Y** 0222	HEC**Y** 0213				
L 250				HEC**Y** 0024	HEC**Y** 0027	HEC**Y** 0029	HEC**Y** 0019
L 500				HEC**Y** 0524	HEC**Y** 0527	HEC**Y** 0529	HEC**Y** 0519
L 1000				HEC**Y** 0124	HEC**Y** 0127	HEC**Y** 0129	HEC**Y** 0119
L 2000				HEC**Y** 0224	HEC**Y** 0227	HEC**Y** 0229	HEC**Y** 0219
T connector with powercord							
L 250	HEC**T** 0023	HEC**T** 0022	HEC**T** 0013				
L 500	HEC**T** 0523	HEC**T** 0522	HEC**T** 0513				
L 1000	HEC**T** 0123	HEC**T** 0122	HEC**T** 0113				
L 2000	HEC**T** 0223	HEC**T** 0222	HEC**T** 0213				
L 250				HEC**T** 0024	HEC**T** 0027	HEC**T** 0029	HEC**T** 0019
L 500				HEC**T** 0524	HEC**T** 0527	HEC**T** 0529	HEC**T** 0519
L 1000				HEC**T** 0124	HEC**T** 0127	HEC**T** 0129	HEC**T** 0119
L 2000				HEC**T** 0224	HEC**T** 0227	HEC**T** 0229	HEC**T** 0219
X connector with powercord							
L 250	HEC**X** 0023	HEC**X** 0022	HEC**X** 0013				
L 500	HEC**X** 0523	HEC**X** 0522	HEC**X** 0513				
L 1000	HEC**X** 0123	HEC**X** 0122	HEC**X** 0113				
L 2000	HEC**X** 0223	HEC**X** 0222	HEC**X** 0213				
L 250				HEC**X** 0024	HEC**X** 0027	HEC**X** 0029	HEC**X** 0019
L 500				HEC**X** 0524	HEC**X** 0527	HEC**X** 0529	HEC**X** 0519
L 1000				HEC**X** 0124	HEC**X** 0127	HEC**X** 0129	HEC**X** 0119
L 2000				HEC**X** 0224	HEC**X** 0227	HEC**X** 0229	HEC**X** 0219

POWERCORD LENGTH	FRAME brass / POWERCORD black	FRAME black / POWERCORD black	FRAME brass / POWERCORD white	FRAME gunmetal / POWERCORD black	FRAME bronze / POWERCORD black	FRAME nickel / POWERCORD black	FRAME nickel / POWERCORD white
90° connector with powercord							
L 250	HEC**90** 0023	HEC**90** 0022	HEC**90** 0013				
L 500	HEC**90** 0523	HEC**90** 0522	HEC**90** 0513				
L 1000	HEC**90** 0123	HEC**90** 0122	HEC**90** 0113				
L 2000	HEC**90** 0223	HEC**90** 0222	HEC**90** 0213				
L 250				HEC**90** 0024	HEC**90** 0027	HEC**90** 0029	HEC**90** 0019
L 500				HEC**90** 0524	HEC**90** 0527	HEC**90** 0529	HEC**90** 0519
L 1000				HEC**90** 0124	HEC**90** 0127	HEC**90** 0129	HEC**90** 0119
L 2000				HEC**90** 0224	HEC**90** 0227	HEC**90** 0229	HEC**90** 0219
120° connector with powercord							
L 250	HEC**120** 0023	HEC**120** 0022	HEC**120** 0013				
L 500	HEC**120** 0523	HEC**120** 0522	HEC**120** 0513				
L 1000	HEC**120** 0123	HEC**120** 0122	HEC**120** 0113				
L 2000	HEC**120** 0223	HEC**120** 0222	HEC**120** 0213				
L 250				HEC**120** 0024	HEC**120** 0027	HEC**120** 0029	HEC**120** 0019
L 500				HEC**120** 0524	HEC**120** 0527	HEC**120** 0529	HEC**120** 0519
L 1000				HEC**120** 0124	HEC**120** 0127	HEC**120** 0129	HEC**120** 0119
L 2000				HEC**120** 0224	HEC**120** 0227	HEC**120** 0229	HEC**120** 0219


L3000 & 4000mm on demand

Austere-Elements Connectors with light-element & powercord

350mA - **driver + base/cover/canopy required** SEE P.62
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
material: brass
CEILING - IP50


POWERCORD LENGTH	FRAME brass / POWERCORD black	FRAME black / POWERCORD black	FRAME brass / POWERCORD white	FRAME gunmetal / POWERCORD black	FRAME bronze / POWERCORD black	FRAME nickel / POWERCORD black	FRAME nickel / POWERCORD white
- connector with light-element & powercord							
L 250	HEC- L023	HEC- L022	HEC- L013				
L 500	HEC- L523	HEC- L522	HEC- L513				
L 1000	HEC- L123	HEC- L122	HEC- L113				
L 2000	HEC- L223	HEC- L222	HEC- L213				
L 250				HEC- L024	HEC- L027	HEC- L029	HEC- L019
L 500				HEC- L524	HEC- L527	HEC- L529	HEC- L519
L 1000				HEC- L124	HEC- L127	HEC- L129	HEC- L119
L 2000				HEC- L224	HEC- L227	HEC- L229	HEC- L219
+ connector with light-element & powercord							
L 250	HEC+ L023	HEC+ L022	HEC+ L013				
L 500	HEC+ L523	HEC+ L522	HEC+ L513				
L 1000	HEC+ L123	HEC+ L122	HEC+ L113				
L 2000	HEC+ L223	HEC+ L222	HEC+ L213				
L 250				HEC+ L024	HEC+ L027	HEC+ L029	HEC+ L019
L 500				HEC+ L524	HEC+ L527	HEC+ L529	HEC+ L519
L 1000				HEC+ L124	HEC+ L127	HEC+ L129	HEC+ L119
L 2000				HEC+ L224	HEC+ L227	HEC+ L229	HEC+ L219

Y connector with light-element & powercord




POWERCORD LENGTH	FRAME brass POWERCORD black	FRAME black POWERCORD black	FRAME brass POWERCORD white	FRAME gunmetal POWERCORD black	FRAME bronze POWERCORD black	FRAME nickel POWERCORD black	FRAME nickel POWERCORD white
L 250	HEC**Y** L023	HEC**Y** L022	HEC**Y** L013				
L 500	HEC**Y** L523	HEC**Y** L522	HEC**Y** L513				
L 1000	HEC**Y** L123	HEC**Y** L122	HEC**Y** L113				
L 2000	HEC**Y** L223	HEC**Y** L222	HEC**Y** L213				
L 250				HEC**Y** L024	HEC**Y** L027	HEC**Y** L029	HEC**Y** L019
L 500				HEC**Y** L524	HEC**Y** L527	HEC**Y** L529	HEC**Y** L519
L 1000				HEC**Y** L124	HEC**Y** L127	HEC**Y** L129	HEC**Y** L119
L 2000				HEC**Y** L224	HEC**Y** L227	HEC**Y** L229	HEC**Y** L219

T connector with light-element & powercord



POWERCORD LENGTH	FRAME brass POWERCORD black	FRAME black POWERCORD black	FRAME brass POWERCORD white	FRAME gunmetal POWERCORD black	FRAME bronze POWERCORD black	FRAME nickel POWERCORD black	FRAME nickel POWERCORD white
L 250	HEC**T** L023	HEC**T** L022	HEC**T** L013				
L 500	HEC**T** L523	HEC**T** L522	HEC**T** L513				
L 1000	HEC**T** L123	HEC**T** L122	HEC**T** L113				
L 2000	HEC**T** L223	HEC**T** L222	HEC**T** L213				
L 250				HEC**T** L024	HEC**T** L027	HEC**T** L029	HEC**T** L019
L 500				HEC**T** L524	HEC**T** L527	HEC**T** L529	HEC**T** L519
L 1000				HEC**T** L124	HEC**T** L127	HEC**T** L129	HEC**T** L119
L 2000				HEC**T** L224	HEC**T** L227	HEC**T** L229	HEC**T** L219

X connector with light-element & powercord




POWERCORD LENGTH	FRAME brass POWERCORD black	FRAME black POWERCORD black	FRAME brass POWERCORD white	FRAME gunmetal POWERCORD black	FRAME bronze POWERCORD black	FRAME nickel POWERCORD black	FRAME nickel POWERCORD white
L 250	HEC**X** L023	HEC**X** L022	HEC**X** L013				
L 500	HEC**X** L523	HEC**X** L522	HEC**X** L513				
L 1000	HEC**X** L123	HEC**X** L122	HEC**X** L113				
L 2000	HEC**X** L223	HEC**X** L222	HEC**X** L213				
L 250				HEC**X** L024	HEC**X** L027	HEC**X** L029	HEC**X** L019
L 500				HEC**X** L524	HEC**X** L527	HEC**X** L529	HEC**X** L519
L 1000				HEC**X** L124	HEC**X** L127	HEC**X** L129	HEC**X** L119
L 2000				HEC**X** L224	HEC**X** L227	HEC**X** L229	HEC**X** L219

90° connector with light-element & powercord



POWERCORD LENGTH	FRAME brass POWERCORD black	FRAME black POWERCORD black	FRAME brass POWERCORD white	FRAME gunmetal POWERCORD black	FRAME bronze POWERCORD black	FRAME nickel POWERCORD black	FRAME nickel POWERCORD white
L 250	HEC**90** L023	HEC**90** L022	HEC**90** L013				
L 500	HEC**90** L523	HEC**90** L522	HEC**90** L513				
L 1000	HEC**90** L123	HEC**90** L122	HEC**90** L113				
L 2000	HEC**90** L223	HEC**90** L222	HEC**90** L213				
L 250				HEC**90** L024	HEC**90** L027	HEC**90** L029	HEC**90** L019
L 500				HEC**90** L524	HEC**90** L527	HEC**90** L529	HEC**90** L519
L 1000				HEC**90** L124	HEC**90** L127	HEC**90** L129	HEC**90** L119
L 2000				HEC**90** L224	HEC**90** L227	HEC**90** L229	HEC**90** L219

120° connector with light-element & powercord




POWERCORD LENGTH	FRAME brass POWERCORD black	FRAME black POWERCORD black	FRAME brass POWERCORD white	FRAME gunmetal POWERCORD black	FRAME bronze POWERCORD black	FRAME nickel POWERCORD black	FRAME nickel POWERCORD white
L 250	HEC**120** L023	HEC**120** L022	HEC**120** L013				
L 500	HEC**120** L523	HEC**120** L522	HEC**120** L513				
L 1000	HEC**120** L123	HEC**120** L122	HEC**120** L113				
L 2000	HEC**120** L223	HEC**120** L222	HEC**120** L213				
L 250				HEC**120** L024	HEC**120** L027	HEC**120** L029	HEC**120** L019
L 500				HEC**120** L524	HEC**120** L527	HEC**120** L529	HEC**120** L519
L 1000				HEC**120** L124	HEC**120** L127	HEC**120** L129	HEC**120** L119
L 2000				HEC**120** L224	HEC**120** L227	HEC**120** L229	HEC**120** L219

Cover/canopy for **Austere**-Elements

REQUIRED COVER/CANOPY for Austere-Elements with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009

cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm



white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

cover C9•
false ceiling

aperture: Ø60 & depth: min. 40mm



white	21CO 1000
black	21CO 2000


cover 4,5"•
false/concrete ceiling

aperture: Ø70 & depth: min. 40mm



white	21CO 0451
black	21CO 0452
brass	21CO 0453
gunmetal	21CO 0454
bronze	21CO 0457
nickel	21CO 0459

canopy B5
false/concrete ceiling



white	21CP 0501
black	21CP 0502
brass	21CP 0503
gunmetal	21CP 0504
bronze	21CP 0507
nickel	21CP 0509

REQUIRED REMOTE MOUNTED DRIVER for Austere-Elements

DEVICE	DIM.	DRIVER	VOLT
5-6 x	LC **(TRIAC/IGBT)**	D 40WT	230V (110V on demand)
7-25 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 150WD24V•	230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6, C9 and 4,5", min. depth for driver in false ceiling: 280mm
driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

REQUIRED BASE (DRIVER INCL.) for SURFACE MOUNTING Austere-Elements


base B20
110V-230V - driver included in base
+ casambi possible



DEVICE			
2-6 x	1-10 PU DA	white	BCDP 2401
2-6 x	1-10 PU DA	black	BCDP 2402
5-6 x	LC	white	BCT6 2401
5-6 x	LC	black	BCT6 2402


optional: **casambi** | D CAS |

base B32
230V - driver included in base




DEVICE			
3-12 x	NO	white	BNDN 0811
3-12 x	NO	black	BNDN 0822

base B50
230V - driver included in base
+ casambi possible



DEVICE			
3-12 x	1-10 PU	white	BDPU 0811
3-12 x	1-10 PU	black	BDPU 0822
3-12 x	DA PU	white	BDDA 0811
3-12 x	DA PU	black	BDDA 0822

optional: **casambi** | D CAS |



Bilo C in FROSTED


500mA - **required driver see below**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
*__FALSE ceiling=__ aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
*__CONCRETE ceiling=__ aperture: Ø67 - depth: min. 100mm (driver remote)
materials: aluminium & transparant glass + screen-printed inner side
*Required free air area, see **www.trizo21.com/requiredarea - CEILING** - **IP50**

FALSE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BCIF 2000	BCIF 1000	BCIF 7000	BCIF 8000	BCIF 9000
2700K	BCIF 2020	BCIF 1020	BCIF 7020	BCIF 8020	BCIF 9020

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000

CONCRETE ceiling




2300K	BCIC 2002	BCIC 1002	BCIC 7002	BCIC 8002	BCIC 9002
2700K	BCIC 2022	BCIC 1022	BCIC 7022	BCIC 8022	BCIC 9022

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo C in MATT


500mA - **required driver see below**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)
materials: aluminium & sandblasted glass
*Required free air area, see **www.trizo21.com/requiredarea - - CEILING - IP50**

FALSE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BCMF 2000	BCMF 1000	BCMF 7000	BCMF 8000	BCMF 9000
2700K	BCMF 2020	BCMF 1020	BCMF 7020	BCMF 8020	BCMF 9020

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000

CONCRETE ceiling




2300K	BCMC 2002	BCMC 1002	BCMC 7002	BCMC 8002	BCMC 9002
2700K	BCMC 2022	BCMC 1022	BWMC 7022	BCMC 8022	BCMC 9022

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo up FROSTED

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
materials: aluminium & transparant glass + screen-printed inner side
CEILING - IP50


	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	LC	BIUI 0002	BIUI 0001	BIUI 0007	BIUI 0008	BIUI 0009
2700K	LC	BIUI 0022	BIUI 0021	BIUI 0027	BIUI 0028	BIUI 0029



Bilo up MATT

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
materials: aluminium & sandblasted glass
CEILING - IP50


	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	LC	BIUM 0002	BIUM 0001	BIUM 0007	BIUM 0008	BIUM 0009
2700K	LC	BIUM 0022	BIUM 0021	BIUM 0027	BIUM 0028	BIUM 0029



Bily 16 in


350mA - **required driver see below**
1 x LED array 11W **(LED incl.)** - 350mA - 1125lm - 2700K - CRI >97
***FALSE ceiling=** aperture: Ø67 - depth: min. 100mm (driver in ceiling) / depth: min. 100mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 150mm (driver remote)
materials: aluminium & transparant glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP50**

FALSE ceiling



	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
silver LED HOLDER	BIINF 1620	BIINF 1610	BIINF 1670	BIINF 1680	BIINF 1690
gold LED HOLDER	BIINF 1628	BIINF 1618	BIINF 1678	BIINF 1688	BIINF 1698

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
silver LED HOLDER	BIINC 1620	BIINC 1610	BIINC 1670	BIINC 1680	BIINC 1690
gold LED HOLDER	BIINC 1628	BIINC 1618	BIINC 1678	BIINC 1688	BIINC 1698

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bily 16 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 11W **(LED incl.)** - 350mA - 1125lm - 2700K - CRI >97
material: aluminium
CEILING - IP50


	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
silver LED HOLDER	LC	BIUP 1620	BIUP 1610	BIUP 1670	BIUP 1680	BIUP 1690
gold LED HOLDER	LC	BIUP 1628	BIUP 1618	BIUP 1678	BIUP 1688	BIUP 1698



Boulo C in FROSTED


500mA - **required driver see below**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)
materials: transparant glass + screen printed inner side
*Required free air area, see **www.trizo21.com/requiredarea - CEILING** - **IP50**

FALSE ceiling



FALSE ceiling	**2300K**	BLCII 1100	
FALSE ceiling	**2700K**	BLCII 1120	

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




CONCRETE ceiling	**2300K**	BLCII 1102	
CONCRETE ceiling	**2700K**	BLCII 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Boulo C in MATT


500mA - **required driver see below**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
*__FALSE ceiling=__ aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
*__CONCRETE ceiling=__ aperture: Ø67 - depth: min. 100mm (driver remote)
material: sandblasted glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING** - **IP50**

FALSE ceiling




FALSE ceiling	**2300K**	BLCIM 1100	
FALSE ceiling	**2700K**	BLCIM 1120	

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




CONCRETE ceiling	**2300K**	BLCIM 1102	
CONCRETE ceiling	**2700K**	BLCIM 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Bouly 4


350mA - **required driver see below**
1 x 4 LED array 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)
material: transparant glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP50**

FALSE ceiling




FALSE ceiling | **silver LED HOLDER** | BOWW 6010 ◆ |

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




CONCRETE ceiling | **silver LED HOLDER** | BOWW 6012 ◆ |

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 5W	230V
1 x	LC **(TRIAC/IGBT)**	D 3WT	110V-230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-3 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	110V-230V
1-3 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-8 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bouly 16


350mA - **required driver see below**
1 x LED array 11W **(LED incl.)** - 350mA - 1125lm - 2700K - CRI >97
***FALSE ceiling=** aperture: Ø67 - depth: min. 100mm (driver in ceiling) / depth: min. 100mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 150mm (driver remote)
material: transparant glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP50**

FALSE ceiling



FALSE ceiling	**silver LED HOLDER**	BOIN 1600
FALSE ceiling	**gold LED HOLDER**	BOIN 1608

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000

CONCRETE ceiling




CONCRETE ceiling	**silver LED HOLDER**	BOIN 1602
CONCRETE ceiling	**gold LED HOLDER**	BOIN 1680

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 15WT	230V
1 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V


driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bouly W/C

350mA - required driver see below
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
depth: min. 75mm (driver in ceiling/wall)
materials: aluminium & PMMA
WALL & CEILING - IP50




FRAME black	FRAME white	FRAME grey	FRAME chrome
BOWW 1002	BOWW 1001	BOWW 1003	BOWW 1009

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 5W	230V
1 x	LC **(TRIAC/IGBT)**	D 3WT	110V-230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-3 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-3 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-8 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V
		driver remote: does not fit through cutout hole of fixture	

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bouly W/C D+B

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
depth: min. 75mm (driver in ceiling/wall)
materials: aluminium & PMMA
WALL & CEILING - IP50




FRAME black	FRAME white	FRAME grey	FRAME chrome
BOWW 1102	BOWW 1101	BOWW 1103	BOWW 1109



Code 1 GU10


230V - GU10 - 1 x QPAR16 max. 50W or 1 x GU10 LED
material: aluminium
Bulb excluded - CEILING - IP50

VOLT	FRAME black ●	FRAME white ○	FRAME alu	FRAME bronze	FRAME chrome
230V	CODE 2001	CODE 1001			
230V			CODE 3001	CODE 7001	
230V					CODE 9001



OPTIONAL COVER FOR CODE 1

ACDE 2010	ACDE 1010			
		ACDE 3010	ACDE 7010	
				ACDE 9010




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Code 1 LED


230V - **driver included in base -** NO **(non-dimmable) or** LC **(TRIAC/IGBT) dimmable**
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

DIM	FRAME black ●	FRAME white ○	FRAME alu	FRAME bronze	FRAME chrome
NO	CODE 2105◆	CODE 1105◆			
NO			CODE 3105◆	CODE 7105◆	
NO					CODE 9105◆
LC	CODE 2405◆	CODE 1605◆			
LC			CODE 3605◆	CODE 7605◆	
LC					CODE 9605◆



OPTIONAL COVER FOR CODE 1 LED


ACDE 2010	ACDE 1010			
		ACDE 3010	ACDE 7010	
				ACDE 9010



Code 2 GU10

230V - GU10 - 2 x QPAR16 max. 50W or 2 x GU10 LED
material: aluminium
Bulbs excluded - CEILING - IP20

FRAME black	FRAME white	FRAME alu	FRAME bronze	FRAME chrome
CODE 2002	CODE 1002	CODE 3002	CODE 7002	CODE 9002



◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Code 2 LED

230V - **driver included in base -** LC **(TRIAC/IGBT) dimmable**
1 x 8 LED 0,96W **(LED incl.)** - 350mA - 912lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze	FRAME chrome
LC	CODE 2207◆	CODE 1207◆			
LC			CODE 3207◆	CODE 7207◆	
LC					CODE 9207◆



Kwa-Kwa 1F Round


12V - **transformer excluded**
G53 - 1 x R111 HALO max. 75W or R111 LED
material: aluminium
Bulb excluded - CEILING - IP20

FLEX LENGTH	FRAME alu
L 200	21IN 3201
L 400	21IN 3241
L 750	21IN 3271
L 1000	21IN 3261

OPTIONAL COVER KWA-KWA 1F ROUND

21AC 3200





Kwa-Kwa 1F Square


12V - **transformer excluded**
G53 - 1 x R111 HALO max. 75W or R111 LED
material: aluminium
Bulb excluded - CEILING - IP20

FLEX LENGTH	FRAME alu
L 200	21IN 4201
L 400	21IN 4241
L 750	21IN 4271
L 1000	21IN 4261

OPTIONAL COVER KWA-KWA 1F SQUARE




21AC 3203



Kwa-Kwa 1F +B Round

12V - **transformer excluded**
G53 - 1 x R111 HALO max. 75W or R111 LED
material: aluminium
Bulb excluded - CEILING - IP20


FLEX LENGTH	FRAME alu
L 200	21SO 3201
L 400	21SO 3241
L 750	21SO 3271
L 1000	21SO 3251



Kwa-Kwa 1FT Rounded LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 1 x R111 LED max. 60W
material: aluminium
LED bulb excluded - CEILING - IP20


DIM	FLEX LENGTH	FRAME alu
LC	L 200	21SO L3314
LC	L 400	21SO L3343
LC	L 750	21SO L3373
LC	L 1000	21SO L3353



Kwa-Kwa 1FT Rectangular LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 1 x R111 LED max. 60W
material: aluminium
LED bulb excluded - CEILING - IP20


DIM	FLEX LENGTH	FRAME alu
LC	L 200	21SO L3214
LC	L 400	21SO L3243
LC	L 750	21SO L3273
LC	L 1000	21SO L3253



Kwa-Kwa 2FT Rounded LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 2 x R111 LED max. 45W
material: aluminium
LED bulbs excluded - CEILING - IP20


DIM	FLEX LENGTH	FRAME alu
LC	L 200	21SO L3402
LC	L 400	21SO L3442
LC	L 750	21SO L3472
LC	L 1000	21SO L3452



Kwa-Kwa 2FT Rectangular LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 2 x R111 LED max. 45W
material: aluminium
LED bulbs excluded - CEILING - IP20


DIM	FLEX LENGTH	FRAME alu
LC	L 200	21SO L3202
LC	L 400	21SO L3242
LC	L 750	21SO L3272
LC	L 1000	21SO L3252



Kwa-Kwa 4FT Rounded LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 4 x R111 LED max. 45W
material: aluminium
LED bulbs excluded - CEILING - IP20

DIM	FLEX LENGTH	FRAME alu
LC	L 200	21SO L3404
LC	L 400	21SO L3444
LC	L 750	21SO L3474
LC	L 1000	21SO L3454



Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Mini-Pi 1 in

350mA - **required driver see below**
1 x 4 LED array 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 35mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 35mm (driver remote)
material: aluminium
CEILING - IP40

FALSE ceiling



	FRAME black	FRAME white	FRAME alu	FRAME bronze
FALSE ceiling	MIPI 1225◆	MIPI 1115◆	MIPI 1995◆	MIPI 1775◆

CONCRETE ceiling




	FRAME black	FRAME white	FRAME alu	FRAME bronze
CONCRETE ceiling	MIPI 1235◆	MIPI 1125◆	MIPI 1925◆	MIPI 1725◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 5W	230V
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1 x	LC **(TRIAC/IGBT)**	D 10WT	230V
3-4 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-3 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-3 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-8 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V
		driver remote: does not fit through cutout hole of fixture	

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Mini-Pi 1 up

230V - **driver included in base** - NO **(non-dimmable) or** LC **(TRIAC/IGBT) dimmable**
1 X 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze
NO	MIPU 1225◆	MIPU 1115◆	MIPU 1995◆	MIPU 1775◆
LC	MIPU 1525◆	MIPU 1615◆	MIPU 1595◆	MIPU 1575◆




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Mini-Pi 1 up Round

230V - **driver included in base** - NO **(non-dimmable)**
1 X 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze
NO	MIPRU 1225◆	MIPRU 1115◆	MIPRU 1995◆	MIPRU 1775◆



◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Mini-Pi 2 in

350mA - **required driver see below**
2 x 4 LED array 0,96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93
FALSE ceiling= aperture: 2 x Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 35mm (driver remote)
material: aluminium
CEILING - IP40


	FRAME black	FRAME white	FRAME alu	FRAME bronze
FALSE ceiling	MIPI 2227◆	MIPI 2117◆	MIPI 2997◆	MIPI 2777◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 10WT	230V
2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Mini-Pi 2 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
2 x 4 LED 0,96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze
LC	MIPU 2225◆	MIPU 2115◆	MIPU 2995◆	MIPU 2775◆



Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Mini-Pi 3 up

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
or
*110V-230V - **driver included in base** - 1-10 **(1-10V) or** PU **(PUSH-DIM) dimmable**
3 x 4 LED 0,96W **(LED incl.)** - 350mA - 3 x 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze
LC	MIPU 3225◆	MIPU 3115◆	MIPU 3995◆	MIPU 3775◆
1-10 PU *	MIPU 3325◆	MIPU 3315◆	MIPU 3395◆	MIPU 3375◆



Naga

110V-230V - GU10 LED
material: aluminium
LED bulb excluded - CEILING - IP20

	FRAME black	FRAME white	FRAME bronze
black RING black RING	NAGA 2112	NAGA 1112	NAGA 7112
white RING white RING	NAGA 2111	NAGA 1111	NAGA 7111
bronze RING bronze RING	NAGA 2117	NAGA 1117	NAGA 7117
gold RING gold RING	NAGA 2116	NAGA 1116	NAGA 7116

FALSE CEILING



CONCRETE CEILING



Pin-In 1

12V - **transformer excluded**
G53 - 1 x R111 max. 100W or R111 LED
FALSE ceiling= aperture: Ø60 - depth: min. 55mm
CONCRETE ceiling= aperture: Ø60 - depth: min. 20mm
material: aluminium
Bulb excluded - CEILING - IP20

	FRAME black	FRAME white	FRAME alu	FRAME bronze	FRAME chrome
FALSE ceiling	PIIN 2101	PIIN 1101	PIIN 4101		
FALSE ceiling				PIIN 7101	PIIN 9101
CONCRETE ceiling	PIIN 2111	PIIN 1111	PIIN 4111		
CONCRETE ceiling				PIIN 7111	PIIN 9111



Pin-In 2

12V - **transformer excluded**
G53 - 2 x R111 max. 100W or R111 LED
FALSE ceiling= aperture: 2 x Ø60 - depth: min. 55mm
material: aluminium
Bulbs excluded - CEILING - IP20

FRAME black	FRAME white	FRAME alu	FRAME bronze	FRAME chrome
PIIN 2102	PIIN 1102	PIIN 4102	PIIN 7102	PIIN 9102



Pin-Up 1 Round LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 1 x R111 LED max. 60W
material: aluminium
LED bulb excluded - CEILING - IP20

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze	FRAME chrome
LC	PIUP L2050	PIUP L1050	PIUP L3050	PIUP L7050	PIUP L9050



Pin-Up 1 Square LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 1 x R111 LED max. 60W
material: aluminium
LED bulb excluded - CEILING - IP20

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze	FRAME chrome
LC	PIUP L2150	PIUP L1150	PIUP L3150	PIUP L7150	PIUP L9150



Pin-Up 2 LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 2 x R111 LED max. 45W
material: aluminium
LED bulbs excluded - WALL & CEILING - IP20

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze	FRAME chrome
LC	PIUP L2152	PIUP L1152	PIUP L3152		
LC				PIUP L7152	
LC					PIUP L9152



Pin-Up 4 LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 4 x R111 LED max. 45W
material: aluminium
LED bulbs excluded - WALL & CEILING - IP20

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze
LC	PIUP L2154	PIUP L1154	PIUP L3154	PIUP L7154



Pin-Up 6 LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 6 x R111 LED max. 45W
material: aluminium
LED bulbs excluded - WALL & CEILING - IP20

DIM	FRAME black	FRAME white	FRAME alu	FRAME bronze
LC	PIUP L2156	PIUP L1156	PIUP L3156	PIUP L7156



R07 in

12V - **transformer excluded**
BA15d - 1 x QR70 max. 50W **LED version available on demand**
aperture: **L** 104 **W** 106 **H** 105
material: aluminium
Bulb excluded - CEILING - IP20


	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	ARIN 2222	ARIN 2122	ARIN 2212	ARIN 2112		
chrome RING	ARIN 2229	ARIN 2129	ARIN 2219	ARIN 2119		
white RING	ARIN 2221	ARIN 2121	ARIN 2211	ARIN 2111		
black RING					ARIN 2292	ARIN 2192
chrome RING					ARIN 2299	ARIN 2199
white RING					ARIN 2291	ARIN 2191

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX



concrete box: **L** 105 **W** 112 **H** 106
aperture: **L** 108 **W** 115 **H** 108

CONC 0007




R07 Rimless

12V - **transformer excluded - installation kit required**
BA15d - 1 x QR70 max. 50W **LED version available on demand**
material: aluminium
Bulb excluded - CEILING - IP20


	INTERIOR black	INTERIOR white
black RING	ARRI 2222	ARRI 2122
chrome RING	ARRI 2229	ARRI 2129
white RING	ARRI 2221	ARRI 2121

REQUIRED INSTALLATION KIT FOR RIMLESS



installation kit: **L** 165 **W** 165 **H** 111
aperture: **L** 120 **W** 110 **H** 113


PLAS 0007



R07 up

230V - **transformer included in base** - NO **(non-dimmable)**
BA15d - 1 x QR70 max. 50W
material: aluminium
Bulb excluded - CEILING - IP20

	DIM	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white
black RING	NO	ARUP 2222	ARUP 2122	ARUP 2212	ARUP 2112
chrome RING	NO	ARUP 2229	ARUP 2129	ARUP 2219	ARUP 2119
white RING	NO	ARUP 2221	ARUP 2121	ARUP 2211	ARUP 2111



R51 in GU10

230V
GU10 - 1 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or 1 x GU10 LED
aperture: **L** 84 **W** 92 **H** 97 - depth: min. 120mm
material: aluminium
Bulb excluded - CEILING - IP20


	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	MIGU 1222	MIGU 1122	MIGU 1212	MIGU 1112		
chrome RING	MIGU 1229	MIGU 1129	MIGU 1219	MIGU 1119		
white RING	MIGU 1221	MIGU 1121	MIGU 1211	MIGU 1111		
black RING					MIGU 1292	MIGU 1192
chrome RING					MIGU 1299	MIGU 1199
white RING					MIGU 1291	MIGU 1191

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX



concrete box: **L** 87 **W** 97 **H** 112
aperture: **L** 90 **W** 100 **H** 120

COGU 0051



◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

R51 in LED

350mA - **required driver see below**
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
aperture: **L** 84 **W** 92 **H** 66 - depth: min. 90mm
material: aluminium
CEILING - IP40

	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	MIWW 1222◆	MIWW 1122◆	MIWW 1212◆	MIWW 1112◆		
white RING	MIWW 1221◆	MIWW 1121◆	MIWW 1211◆	MIWW 1111◆		
black RING					MIWW 1292◆	MIWW 1192◆
white RING					MIWW 1291◆	MIWW 1191◆

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX



concrete box: **L** 87 **W** 97 **H** 106
aperture: **L** 90 **W** 100 **H** 108


CONC 0051

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 5W	230V
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-3 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-3 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-8 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

R51 Rimless LED

350mA - required driver see below - installation kit required
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

	INTERIOR black	INTERIOR white
black RING	MRWW 1202◆	MRWW 1102◆
white RING	MRWW 1201◆	MRWW 1101◆

REQUIRED INSTALLATION KIT FOR RIMLESS



installation kit: L 145 W 145 H 82
aperture: L 100 W 90 H 84

PLAS 0051

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 5W	230V
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-3 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-3 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-8 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



R51 up GU10

230V
GU10 - 1 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or 1 x GU10 LED max. 20W
material: aluminium
LED bulb excluded - CEILING - IP20

	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white
black RING	MUGU 1222	MUGU 1122	MUGU 1212	MUGU 1112
chrome RING	MUGU 1229	MUGU 1129	MUGU 1219	MUGU 1119
white RING	MUGU 1221	MUGU 1121	MUGU 1211	MUGU 1111




Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

R51 up LED

230V - **driver included in base** - NO **(non-dimmable) or** LC **(TRIAC/IGBT) dimmable**
1 X 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

	DIM	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white
black RING	NO	MUWW 1222◆	MUWW 1122◆	MUWW 1212◆	MUWW 1112◆
white RING	NO	MUWW 1221◆	MUWW 1121◆	MUWW 1211◆	MUWW 1111◆
black RING	LC	MUWW 1522 ◆	MUWW 1622◆	MUWW 1512◆	MUWW 1612◆
white RING	LC	MUWW 1521◆	MUWW 1621◆	MUWW 1511◆	MUWW 1611◆




R52 in GU10

230V
GU10 - 2 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or 2 x GU10 LED
aperture: **L** 159 **W** 92 **H** 97 - depth: min. 120mm
material: aluminium
Bulbs excluded - CEILING - IP20


	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	MIGU 2222	MIGU 2122	MIGU 2212	MIGU 2112		
chrome RING	MIGU 2229	MIGU 2129	MIGU 2219	MIGU 2119		
white RING	MIGU 2221	MIGU 2121	MIGU 2211	MIGU 2111		
black RING					MIGU 2292	MIGU 2192
chrome RING					MIGU 2299	MIGU 2199
white RING					MIGU 2291	MIGU 2191

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX



concrete box: **L** 162 **W** 97 **H** 112
aperture: **L** 165 **W** 100 **H** 120

COGU 0052




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

R52 in LED

230V - required driver see below
2 x 4 LED 0,96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93
aperture: **L** 159 **W** 92 **H** 66 - depth: min. 90mm
material: aluminium
CEILING - IP40

	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	MIWW 2222◆	MIWW 2122◆	MIWW 2212◆	MIWW 2112◆		
white RING	MIWW 2221◆	MIWW 2121◆	MIWW 2211◆	MIWW 2111◆		
black RING					MIWW 2292◆	MIWW 2192◆
white RING					MIWW 2291◆	MIWW 2191◆

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX



concrete box: **L** 162 **W** 97 **H** 106
aperture: **L** 165 **W** 100 **H** 108

CONC 0052

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 10WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-4 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

R52 Rimless LED

350mA - required driver see below - installation kit required
2 x 4 LED 0,96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

	INTERIOR black	INTERIOR white
black RING	MRWW 2202◆	MRWW 2102◆
white RING	MRWW 2201◆	MRWW 2101◆

REQUIRED INSTALLATION KIT FOR RIMLESS



installation kit: L 220 W 145 H 82
aperture: L 175 W 90 H 84

PLAS 0052

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 10WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-4 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



R52 up GU10

230V
GU10 - 2 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or 2 x GU10 LED max. 20W
material: aluminium
LED bulbs excluded - CEILING - IP20

	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white
black RING	MUGU 2222	MUGU 2122	MUGU 2212	MUGU 2112
chrome RING	MUGU 2229	MUGU 2129	MUGU 2219	MUGU 2119
white RING	MUGU 2221	MUGU 2121	MUGU 2211	MUGU 2111




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

R52 up LED

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable or** 1-10 **(1-10V),** PU **(PUSH-DIM) dimmable**
2 X 4 LED 0,96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

	DIM	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white
black RING	LC	MUWW 2222◆	MUWW 2122◆	MUWW 2212◆	MUWW 2112◆
white RING	LC	MUWW 2221◆	MUWW 2121◆	MUWW 2211◆	MUWW 2111◆
black RING	1-10 PU	MUWW 2222P◆	MUWW 2122P◆	MUWW 2212P◆	MUWW 2112P◆
white RING	1-10 PU	MUWW 2221P◆	MUWW 2121P◆	MUWW 2211P◆	MUWW 2111P◆




R54 in GU10

230V
GU10 - 4 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or 4 x GU10 LED
aperture: **L** 309 **W** 92 **H** 97 - depth: min. 120mm
material: aluminium
Bulbs excluded - CEILING - IP20


	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	MIGU 4222	MIGU 4122	MIGU 4212	MIGU 4112		
chrome RING	MIGU 4229	MIGU 4129	MIGU 4219	MIGU 4119		
white RING	MIGU 4221	MIGU 4121	MIGU 4211	MIGU 4111		
black RING					MIGU 4292	MIGU 4192
chrome RING					MIGU 4299	MIGU 4199
white RING					MIGU 4291	MIGU 4191

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX



concrete box: **L** 312 **W** 97 **H** 112
aperture: **L** 315 **W** 100 **H** 120

COGU 0054




Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

R54 in LED

350mA - required driver see below
4 x 4 LED 0,96W **(LED incl.)** - 350mA - 4 x 456lm - 2700K - CRI >93
aperture: **L** 309 **W** 92 **H** 66 - depth: min. 90mm
material: aluminium
CEILING - IP40

	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	MIWW 4222◆	MIWW 4122◆	MIWW 4212◆	MIWW 4112◆		
white RING	MIWW 4221◆	MIWW 4121◆	MIWW 4211◆	MIWW 4111◆		
black RING					MIWW 4292◆	MIWW 4192◆
white RING					MIWW 4291◆	MIWW 4191◆

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX




concrete box: **L** 312 **W** 97 **H** 106
aperture: **L** 315 **W** 100 **H** 108

CONC 0054

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

R54 Rimless LED

350mA - required driver see below - installation kit required
4 x 4 LED 0,96W **(LED incl.)** - 350mA - 4 x 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

	INTERIOR black	INTERIOR white
black RING	MRWW 4202◆	MRWW 4102◆
white RING	MRWW 4201◆	MRWW 4101◆

REQUIRED INSTALLATION KIT FOR RIMLESS



installation kit: L 370 W 145 H 82
aperture: L 325 W 90 H 84

PLAS 0054

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



R54 up GU10

230V
GU10 - 4 x HALO QPAR16 (alu reflector / no cool beam) max. 50W or 4 x GU10 LED max. 20W
material: aluminium
LED bulbs excluded - CEILING - IP20

	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white
black RING	MUGU 4222	MUGU 4122	MUGU 4212	MUGU 4112
chrome RING	MUGU 4229	MUGU 4129	MUGU 4219	MUGU 4119
white RING	MUGU 4221	MUGU 4121	MUGU 4211	MUGU 4111



◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

R54 up LED

230V - **driver included in base** - LC **(TRIAC/IGBT) or** 1-10 **(1-10V),** PU **(PUSH-DIM) dimmable**
4 X 4 LED 0,96W **(LED incl.)** - 350mA - 4 x 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP40

	DIM	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white
black RING	LC	MUWW 4222◆	MUWW 4122◆	MUWW 4212◆	MUWW 4112◆
white RING	LC	MUWW 4221◆	MUWW 4121◆	MUWW 4211◆	MUWW 4111◆
black RING	1-10 PU	MUWW 4222P◆	MUWW 4122P◆	MUWW 4212P◆	MUWW 4112P◆
white RING	1-10 PU	MUWW 4221P◆	MUWW 4121P◆	MUWW 4211P◆	MUWW 4111P◆




R70 in

12V - **transformer excluded**
BA15d - 2 x QR70 max. 50W **LED version available on demand**
aperture: **L** 204 **W** 106 **H** 105
material: aluminium
Bulbs excluded - CEILING - IP20


	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	ARIN 7222	ARIN 7122	ARIN 7212	ARIN 7112		
chrome RING	ARIN 7229	ARIN 7129	ARIN 7219	ARIN 7119		
white RING	ARIN 7221	ARIN 7121	ARIN 7211	ARIN 7111		
black RING					ARIN 7292	ARIN 7192
chrome RING					ARIN 7299	ARIN 7199
white RING					ARIN 7291	ARIN 7191

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX



concrete box: **L** 205 **W** 112 **H** 106
aperture: **L** 208 **W** 115 **H** 108

CONC 0070




R70 Rimless

12V - **transformer excluded - installation kit required**
BA15d - 2 x QR70 max. 50W **LED version available on demand**
material: aluminium
Bulbs excluded - CEILING - IP20

	INTERIOR black	INTERIOR white
black RING	ARRI 7222	ARRI 7122
chrome RING	ARRI 7229	ARRI 7129
white RING	ARRI 7221	ARRI 7121

REQUIRED INSTALLATION KIT FOR RIMLESS



installation kit: **L** 265 **W** 265 **H** 111
aperture: **L** 220 **W** 110 **H** 113

PLAS 0070



R70 up

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
BA15d - 2 x QR70 max. 50W
material: aluminium
Bulbs excluded - CEILING - IP20

	DIM	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white
black RING	LC	ARUP 7222	ARUP 7122	ARUP 7212	ARUP 7112
chrome RING	LC	ARUP 7229	ARUP 7129	ARUP 7219	ARUP 7119
white RING	LC	ARUP 7221	ARUP 7121	ARUP 7211	ARUP 7111



R110 in G53

12V - **transformer excluded**
G53 - 1 x R111 max. 100W or R111 LED
aperture: **L** 149 **W** 151 **H** 80 - depth: min. 120mm
material: aluminium
Bulb excluded - CEILING - IP20

	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	ARIN 0222	ARIN 0122	ARIN 0212	ARIN 0112		
chrome RING	ARIN 0229	ARIN 0129	ARIN 0219	ARIN 0119		
white RING	ARIN 0221	ARIN 0121	ARIN 0211	ARIN 0111		
black RING					ARIN 0292	ARIN 0192
chrome RING					ARIN 0299	ARIN 0199
white RING					ARIN 0291	ARIN 0191

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX



concrete box: **L** 152 **W** 158 **H** 120
aperture: **L** 155 **W** 161 **H** 122

CONC 0110




R110 Rimless

12V - **transformer excluded - installation kit required**
G53 - 1 x R111 max. 100W or R111 LED
material: aluminium
Bulb excluded - CEILING - IP20

	INTERIOR black	INTERIOR white
black RING	ARRI 0222	ARRI 0122
chrome RING	ARRI 0229	ARRI 0129
white RING	ARRI 0221	ARRI 0121

REQUIRED INSTALLATION KIT FOR RIMLESS



installation kit: L 210 W 210 H 84
aperture: L 165 W 155 H 8

PLAS 0110



R110 up G53 LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 1 x R111 LED max. 60W
material: aluminium
LED bulb excluded - CEILING - IP20

	DIM	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white
black RING	LC	ARUP L0222	ARUP L0122	ARUP L0212	ARUP L0112
chrome RING	LC	ARUP L0229	ARUP L0129	ARUP L0219	ARUP L0119
white RING	LC	ARUP L0221	ARUP L0121	ARUP L0211	ARUP L0111




R111 in G53

12V - **transformer excluded**
G53 - 2 x R111 max. 100W or R111 LED
aperture: **L** 289 **W** 151 **H** 80 depth: min. 120mm
material: aluminium
Bulbs excluded - CEILING - IP20

	FRAME black / INTERIOR black	FRAME black / INTERIOR white	FRAME white / INTERIOR black	FRAME white / INTERIOR white	FRAME chrome / INTERIOR black	FRAME chrome / INTERIOR white
black RING	ARIN 1222	ARIN 1122	ARIN 1212	ARIN 1112		
chrome RING	ARIN 1229	ARIN 1129	ARIN 1219	ARIN 1119		
white RING	ARIN 1221	ARIN 1121	ARIN 1211	ARIN 1111		
black RING					ARIN 1292	ARIN 1192
chrome RING					ARIN 1299	ARIN 1199
white RING					ARIN 1291	ARIN 1191

ACCESSORY FOR CONCRETE CEILING: CONCRETE BOX



concrete box: **L** 292 **W** 158 **H** 120
aperture: **L** 295 **W** 161 **H** 122

CONC 0111




R111 Rimless

12V - **transformer excluded - installation kit required**
G53 - 2 x R111 max. 100W or R111 LED
material: aluminium
Bulbs excluded - CEILING - IP20

	INTERIOR black	INTERIOR white
black RING	ARRI 1222	ARRI 1122
chrome RING	ARRI 1229	ARRI 1129
white RING	ARRI 1221	ARRI 1121

REQUIRED INSTALLATION KIT FOR RIMLESS



installation kit: **L** 350 **W** 210 **H** 84
aperture: **L** 305 **W** 155 **H** 86

PLAS 0111



R111 up G53 LED

230V - **transformer included in base** - LC **(TRIAC/IGBT) dimmable**
G53 - 2 x R111 LED max. 45W
material: aluminium
LED bulbs excluded - CEILING - IP20

	DIM	FRAME black ● INTERIOR black ●	FRAME black ● INTERIOR white ○	FRAME white ○ INTERIOR black ●	FRAME white ○ INTERIOR white ○
black RING ●	LC	ARUP L1222	ARUP L1122	ARUP L1212	ARUP L1112
chrome RING ◐	LC	ARUP L1229	ARUP L1129	ARUP L1219	ARUP L1119
white RING ○	LC	ARUP L1221	ARUP L1121	ARUP L1211	ARUP L1111

Wall



2THIRTY

2Thirty-W1 98
2Thirty-W1 plug 98
2Thirty-W1 in 99
2Thirty-W1 in 350mA 99
2Thirty-WH2 100
2Thirty-WV2 100



AUDE-WALL

Aude-Wall L built-in 101
Aude-Wall L plug 102



AUDETTE

Audette W1 in Rounded 103
Audette W2 in Rounded 104
Audette WD1 up Rounded 105
Audette WD1S up Rounded 105
Audette-Duo W1 in Rounded 106
Audette-Duo W2 in Rounded 107
Audette-Duo WD1 up Rounded 108
Audette-Varié W1 in Rounded 109
Audette-Varié W2 in Rounded 110
Audette-Varié WD1 up Rounded 110



AUDY

Audy-Wall 1S 111
Audy-Wall 1S Duo 112
Audy-Wall 2S 113
Audy-Wall 2S Duo 114



AUSTERE

Austere-Wall built-in 115
Austere-Wall plug 115
Austere-Wall push built-in 116
Austere-Wall push plug 116



BILO


Bilo W in FROSTED 117
Bilo W in MATT 118

Wall



BOULO

Boulo W in FROSTED 119
Boulo W in MATT 120



BOULY

Bouly W/C 121
Bouly W/C D+B 121



CODE

Code W G9 122
Code W LED 123



SCAR-LEATHER

Scar-Leather 1FD built-in 124
Scar-Leather 1FDS built-in 125
Scar-Leather 1FD built-up 126
Scar-Leather 1FDS built-up 127



SCAR-LED

Scar-Led 1FD built-in 45 128
Scar-Led 1FD built-in 60 128
Scar-Led 1FDS built-in 60 129
Scar-Led 1FD built-in 95 129
Scar-Led 1FDS built-in 95 130
Scar-Led 1FD built-up 130
Scar-Led 1FDS built-up 130
Scar-Led 1FDS built-up plug 131



SCAR-LITE

Scar-Lite 1FD built-in 131
Scar-Lite 1FDS built-in 132
Scar-Lite 1FDS built-up 132
Scar-Lite USB built-up 133
Scar-Lite 1FDS built-up plug 133



SIRENS


Sirens W diffuser glass 134
Sirens W mirror 134
Sirens W frosted glass
big mirror + edge mirror 135
Sirens W frosted glass
small mirror + edge mirror 135
Sirens W frosted glass + edge mirror 135




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

2Thirty-W1

230V (110V **on demand**)
1 x LED module 10W **(LED incl.)** - 230V - 1000lm - 2700K - CRI >90 - **TRIAC dimmable**
materials: brass, aluminium
WALL - IP50 □




	BASE & BODY black ROD black SWIVEL black RING black	BASE & BODY black ROD black SWIVEL black RING bronze	BASE & BODY black ROD black SWIVEL black RING gold	BASE & BODY black ROD black SWIVEL black RING alu
	● ● ● ●	● ● ● ●	● ● ● ●	● ● ● ●
	THW 12223◆	THW 17223◆	THW 18223◆	THW 19223◆
+ honeycomb	THW 12223H◆	THW 17223H◆	THW 18223H◆	THW 19223H◆




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

2Thirty-W1 plug

230V - **ON/OFF on armature** or 110V* - **ON/OFF on armature**
1 x LED module 10W **(LED incl.)** - 230V - 1000lm - 2700K - CRI >90
materials: brass, aluminium
WALL - IP50 □




		BASE & BODY black ROD black SWIVEL black RING black	BASE & BODY black ROD black SWIVEL black RING bronze	BASE & BODY black ROD black SWIVEL black RING gold	BASE & BODY black ROD black SWIVEL black RING alu
		● ● ● ●	● ● ● ●	● ● ● ●	● ● ● ●
	EU plug	THWP EU 12 ◆	THWP EU 17 ◆	THWP EU 18 ◆	THWP EU 19 ◆
	UK plug	THWP UK 12 ◆	THWP UK 17 ◆	THWP UK 18 ◆	THWP UK 19 ◆
	US plug*	THWP US 12 ◆	THWP US 17 ◆	THWP US 18 ◆	THWP US 19 ◆
	AU plug	THWP AU 12 ◆	THWP AU 17 ◆	THWP AU 18 ◆	THWP AU 19 ◆
+ honeycomb	**EU plug**	THWP EU 12H ◆	THWP EU 17H ◆	THWP EU 18H ◆	THWP EU 19H ◆
+ honeycomb	**UK plug**	THWP UK 12H ◆	THWP UK 17H ◆	THWP UK 18H ◆	THWP UK 19H ◆
+ honeycomb	**US plug***	THWP US 12H ◆	THWP US 17H ◆	THWP US 18H ◆	THWP US 19H ◆
+ honeycomb	**AU plug**	THWP AU 12H ◆	THWP AU 17H ◆	THWP AU 18H ◆	THWP AU 19H ◆



Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

2Thirty-W1 in

230V (110V **on demand**)
1 x LED module 10W **(LED incl.)** - 230V - 1000lm - 2700K - CRI >90 - **TRIAC dimmable**
materials: brass, aluminium
WALL - IP50




	BASE & BODY black ROD black SWIVEL black RING black	BASE & BODY black ROD black SWIVEL black RING bronze	BASE & BODY black ROD black SWIVEL black RING gold	BASE & BODY black ROD black SWIVEL black RING alu
	● ● ● ●	● ● ● ●	● ● ● ●	● ● ● ●
	TWIN 12223◆	TWIN 17223◆	TWIN 18223◆	TWIN 19223◆
+ honeycomb	TWIN 12223H◆	TWIN 17223H◆	TWIN 18223H◆	TWIN 19223H◆



Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

2Thirty-W1 in 350mA

350mA - required remote mounted driver see below - **PUSH-DIM on armature**
1 x LED array 11,8W **(LED incl.)** - 350mA - 1241lm - 2700K - CRI >97 - **dimmable**
materials: brass, aluminium
WALL - IP50




	BASE & BODY black ROD black SWIVEL black RING black	BASE & BODY black ROD black SWIVEL black RING bronze	BASE & BODY black ROD black SWIVEL black RING gold	BASE & BODY black ROD black SWIVEL black RING alu
	● ● ● ●	● ● ● ●	● ● ● ●	● ● ● ●
	TW3N 12223◆	TW3N 17223◆	TW3N 18223◆	TW3N 19223◆
+ honeycomb	TW3N 12223H◆	TW3N 17223H◆	TW3N 18223H◆	TW3N 19223H◆

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)**	D 15WPLV	110V-230V
		driver remote: does not fit through cutout hole of fixture	

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Choose beam left lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°


Choose beam right lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty-WH2

230V (110V **on demand**)
2 x LED module 10W **(LED incl.)** - 230V - 2 x 1000lm - 2700K - CRI >90 - **TRIAC dimmable**
materials: brass, aluminium
WALL - IP50



	BASE & BODY black	ROD black	SWIVEL black	RING black	BASE & BODY black	ROD black	SWIVEL black	RING bronze	BASE & BODY black	ROD black	SWIVEL black	RING gold	BASE & BODY black	ROD black	SWIVEL black	RING alu
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	THH 22223 ◄►				THH 27223 ◄►				THH 28223 ◄►				THH 29223 ◄►			
+ honeycomb	THH 22223H ◄►				THH 27223H ◄►				THH 28223H ◄►				THH 29223H ◄►			

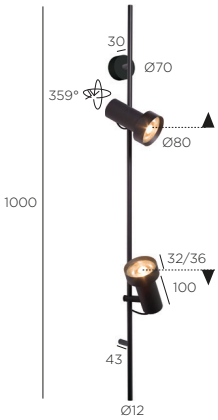


Choose beam upper lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°


Choose beam lower lightsource:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty-WV2

230V (110V **on demand**)
2 x LED module 10W **(LED incl.)** - 230V - 2 x 1000lm - 2700K - CRI >90 - **TRIAC dimmable**
materials: brass, aluminium
WALL - IP50



	BASE & BODY black	ROD black	SWIVEL black	RING black	BASE & BODY black	ROD black	SWIVEL black	RING bronze	BASE & BODY black	ROD black	SWIVEL black	RING gold	BASE & BODY black	ROD black	SWIVEL black	RING alu
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	THR 22223 ▲▼				THR 27223 ▲▼				THR 28223 ▲▼				THR 29223 ▲▼			
+ honeycomb	THR 22223H ▲▼				THR 27223H ▲▼				THR 28223H ▲▼				THR 29223H ▲▼			



◆ Choose beam:
M=medium 23° or
W=wide 40°

Aude-Wall L

500mA - **required remote mounted driver see below**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
material: brass
WALL - IP50


		FRAME brass	FRAME gunmetal	FRAME bronze	FRAME nickel
	2700K	ADWL 1273◆			
	2700K		ADWL 1274◆	ADWL 1277◆	ADWL 1279◆
	3000K	ADWL 1303◆			
	3000K		ADWL 1304◆	ADWL 1307◆	ADWL 1309◆
+ honeycomb	**2700K**	ADWL 1273H◆			
+ honeycomb	**2700K**		ADWL 1274H◆	ADWL 1277H◆	ADWL 1279H◆
+ honeycomb	**3000K**	ADWL 1303H◆			
+ honeycomb	**3000K**		ADWL 1304H◆	ADWL 1307H◆	ADWL 1309H◆

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-4 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

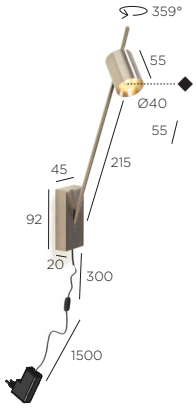

Aude-Wall L plug

100V-240V - **plugdriver with** PU **(PUSH-DIM) button on cable**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
material: brass
WALL - IP50


			DIM	FRAME brass	FRAME gunmetal	FRAME bronze	FRAME nickel
EU plug	**2700K**		PU	ADWL 1273EU◆			
EU plug	**2700K**		PU		ADWL 1274EU◆	ADWL 1277EU◆	ADWL 1279EU◆
UK plug	**2700K**		PU	ADWL 1273UK◆			
UK plug	**2700K**		PU		ADWL 1274UK◆	ADWL 1277UK◆	ADWL 1279UK◆
US plug	**2700K**		PU	ADWL 1273US◆			
US plug	**2700K**		PU		ADWL 1274US◆	ADWL 1277US◆	ADWL 1279US◆
AU plug	**2700K**		PU	ADWL 1273AU◆			
AU plug	**2700K**		PU		ADWL 1274AU◆	ADWL 1277AU◆	ADWL 1279AU◆
EU plug	**3000K**		PU	ADWL 1303EU◆			
EU plug	**3000K**		PU		ADWL 1304EU◆	ADWL 1307EU◆	ADWL 1309EU◆
UK plug	**3000K**		PU	ADWL 1303UK◆			
UK plug	**3000K**		PU		ADWL 1304UK◆	ADWL 1307UK◆	ADWL 1309UK◆
US plug	**3000K**		PU	ADWL 1303US◆			
US plug	**3000K**		PU		ADWL 1304US◆	ADWL 1307US◆	ADWL 1309US◆
AU plug	**3000K**		PU	ADWL 1303AU◆			
AU plug	**3000K**		PU		ADWL 1304AU◆	ADWL 1307AU◆	ADWL 1309AU◆
+ honeycomb	**EU plug**	**2700K**	PU	ADWL 1273HEU◆			
+ honeycomb	**EU plug**	**2700K**	PU		ADWL 1274HEU◆	ADWL 1277HEU◆	ADWL 1279HEU◆
+ honeycomb	**UK plug**	**2700K**	PU	ADWL 1273HUK◆			
+ honeycomb	**UK plug**	**2700K**	PU		ADWL 1274HUK◆	ADWL 1277HUK◆	ADWL 1279HUK◆
+ honeycomb	**US plug**	**2700K**	PU	ADWL 1273HUS◆			
+ honeycomb	**US plug**	**2700K**	PU		ADWL 1274HUS◆	ADWL 1277HUS◆	ADWL 1279HUS◆
+ honeycomb	**AU plug**	**2700K**	PU	ADWL 1273HAU◆			
+ honeycomb	**AU plug**	**2700K**	PU		ADWL 1274HAU◆	ADWL 1277HAU◆	ADWL 1279HAU◆
+ honeycomb	**EU plug**	**3000K**	PU	ADWL 1303HEU◆			
+ honeycomb	**EU plug**	**3000K**	PU		ADWL 1304HEU◆	ADWL 1307HEU◆	ADWL 1309HEU◆
+ honeycomb	**UK plug**	**3000K**	PU	ADWL 1303HUK◆			
+ honeycomb	**UK plug**	**3000K**	PU		ADWL 1304HUK◆	ADWL 1307HUK◆	ADWL 1309HUK◆
+ honeycomb	**US plug**	**3000K**	PU	ADWL 1303HUS◆			
+ honeycomb	**US plug**	**3000K**	PU		ADWL 1304HUS◆	ADWL 1307HUS◆	ADWL 1309HUS◆
+ honeycomb	**AU plug**	**3000K**	PU	ADWL 1303HAU◆			
+ honeycomb	**AU plug**	**3000K**	PU		ADWL 1304HAU◆	ADWL 1307HAU◆	ADWL 1309HAU◆



Choose beam:
M=medium 23° or
W=wide 40°

Audette W1 in Rounded

500mA - **required remote mounted driver see below**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
WALL - IP50



		COVER brass	SWIVEL brass	BODY brass	RING brass	COVER black	SWIVEL black	BODY black	RING black	COVER white	SWIVEL white	BODY white	RING white	COVER gunmetal	SWIVEL gunmetal	BODY gunmetal	RING gunmetal	COVER bronze	SWIVEL bronze	BODY bronze	RING bronze	COVER nickel	SWIVEL nickel	BODY nickel	RING nickel
	2700K	AWBI 23333◆																							
	2700K					AWBI 22222◆				AWBI 21111◆															
	2700K													AWBI 24444◆				AWBI 27777◆				AWBI 29999◆			
	3000K	AWBI 33333◆																							
	3000K					AWBI 32222◆				AWBI 31111◆															
	3000K													AWBI 34444◆				AWBI 37777◆				AWBI 39999◆			
+ honeycomb	2700K	AWBI 23333H◆																							
+ honeycomb	2700K					AWBI 22222H◆				AWBI 21111H◆															
+ honeycomb	2700K													AWBI 24444H◆				AWBI 27777H◆				AWBI 29999H◆			
+ honeycomb	3000K	AWBI 33333H◆																							
+ honeycomb	3000K					AWBI 32222H◆				AWBI 31111H◆															
+ honeycomb	3000K													AWBI 34444H◆				AWBI 37777H◆				AWBI 39999H◆			

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-4 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette W2 in Rounded

500mA - **required remote mounted driver see below**
2 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95
materials: brass, aluminium
WALL - IP50




		COVER brass	SWIVEL brass	BODY brass	RING brass	COVER black	SWIVEL black	BODY black	RING black	COVER white	SWIVEL white	BODY white	RING white	COVER gunmetal	SWIVEL gunmetal	BODY gunmetal	RING gunmetal	COVER bronze	SWIVEL bronze	BODY bronze	RING bronze	COVER nickel	SWIVEL nickel	BODY nickel	RING nickel
	2700K	AWBD 23333◆																							
	2700K					AWBD 22222◆				AWBD 21111◆															
	2700K													AWBD 24444◆				AWBD 27777◆				AWBD 29999◆			
	3000K	AWBD 33333◆																							
	3000K					AWBD 32222◆				AWBD 31111◆															
	3000K													AWBD 34444◆				AWBD 37777◆				AWBD 39999◆			
+ honeycomb	**2700K**	AWBD 23333H◆																							
+ honeycomb	**2700K**					AWBD 22222H◆				AWBD 21111H◆															
+ honeycomb	**2700K**													AWBD 24444H◆				AWBD 27777H◆				AWBD 29999H◆			
+ honeycomb	**3000K**	AWBD 33333H◆																							
+ honeycomb	**3000K**					AWBD 32222H◆				AWBD 31111H◆															
+ honeycomb	**3000K**													AWBD 34444H◆				AWBD 37777H◆				AWBD 39999H◆			

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Choose beam:
M=medium 23° or
W=wide 40°

Audette WD1 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
WALL - IP50




		DIM	BASE brass / SWIVEL brass / BODY brass / RING brass	BASE black / SWIVEL black / BODY black / RING black	BASE white / SWIVEL white / BODY white / RING white	BASE gunmetal / SWIVEL gunmetal / BODY gunmetal / RING gunmetal	BASE bronze / SWIVEL bronze / BODY bronze / RING bronze	BASE nickel / SWIVEL nickel / BODY nickel / RING nickel
	2700K	LC	AWBU 23333◆					
	2700K	LC		AWBU 22222◆	AWBU 21111◆			
	2700K	LC				AWBU 24444◆	AWBU 27777◆	AWBU 29999◆
	3000K	LC	AWBU 33333◆					
	3000K	LC		AWBU 32222◆	AWBU 31111◆			
	3000K	LC				AWBU 34444◆	AWBU 37777◆	AWBU 39999◆
+ honeycomb	2700K	LC	AWBU 23333H◆					
+ honeycomb	2700K	LC		AWBU 22222H◆	AWBU 21111H◆			
+ honeycomb	2700K	LC				AWBU 24444H◆	AWBU 27777H◆	AWBU 29999H◆
+ honeycomb	3000K	LC	AWBU 33333H◆					
+ honeycomb	3000K	LC		AWBU 32222H◆	AWBU 31111H◆			
+ honeycomb	3000K	LC				AWBU 34444H◆	AWBU 37777H◆	AWBU 39999H◆




Choose beam:
M=medium 23° or
W=wide 40°

Audette WD1S up Rounded

230V - **driver included in base** - NO **ON/OFF armature**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
WALL - IP50




		DIM	BASE brass / SWIVEL brass / BODY brass / RING brass	BASE black / SWIVEL black / BODY black / RING black	BASE white / SWIVEL white / BODY white / RING white	BASE gunmetal / SWIVEL gunmetal / BODY gunmetal / RING gunmetal	BASE bronze / SWIVEL bronze / BODY bronze / RING bronze	BASE nickel / SWIVEL nickel / BODY nickel / RING nickel
	2700K	NO	AWBS 23333◆					
	2700K	NO		AWBS 22222◆	AWBS 21111◆			
	2700K	NO				AWBS 24444◆	AWBS 27777◆	AWBS 29999◆
	3000K	NO	AWBS 33333◆					
	3000K	NO		AWBS 32222◆	AWBS 31111◆			
	3000K	NO				AWBS 34444◆	AWBS 37777◆	AWBS 39999◆
+ honeycomb	2700K	NO	AWBS 23333H◆					
+ honeycomb	2700K	NO		AWBS 22222H◆	AWBS 21111H◆			
+ honeycomb	2700K	NO				AWBS 24444H◆	AWBS 27777H◆	AWBS 29999H◆
+ honeycomb	3000K	NO	AWBS 33333H◆					
+ honeycomb	3000K	NO		AWBS 32222H◆	AWBS 31111H◆			
+ honeycomb	3000K	NO				AWBS 34444H◆	AWBS 37777H◆	AWBS 39999H◆



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette-Duo W1 in Rounded

500mA - **required remote mounted driver see below**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
WALL - IP50



		COVER brass ● SWIVEL brass ● BODY brass ● RING black	COVER brass ○ SWIVEL brass ○ BODY brass ○ RING white	COVER black ● SWIVEL black ● BODY black ● RING brass ○	COVER white ○ SWIVEL white ○ BODY white ○ RING brass ○	COVER black ● SWIVEL brass ○ BODY brass ○ RING black ●	COVER white ○ SWIVEL brass ○ BODY brass ○ RING white ○
	2700K	AWBI 23332◆	AWBI 23331◆			AWBI 22332◆	AWBI 21331◆
	2700K			AWBI 22223◆	AWBI 21113◆		
	3000K	AWBI 33332◆	AWBI 33331◆			AWBI 32332◆	AWBI 31331◆
	3000K			AWBI 32223◆	AWBI 31113◆		
+ honeycomb	**2700K**	AWBI 23332H◆	AWBI 23331H◆			AWBI 22332H◆	AWBI 21331H◆
+ honeycomb	**2700K**			AWBI 22223H◆	AWBI 21113H◆		
+ honeycomb	**3000K**	AWBI 33332H◆	AWBI 33331H◆			AWBI 32332H◆	AWBI 31331H◆
+ honeycomb	**3000K**			AWBI 32223H◆	AWBI 31113H◆		


REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-4 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**


gunmetal, bronze and **nickel** combinations on demand



Choose beam:
M=medium 23° or
W=wide 40°

Audette-Duo W2 in Rounded

500mA - **required remote mounted driver see below**
2 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95
materials: brass, aluminium
WALL - IP50



		COVER brass SWIVEL brass BODY brass RING black	COVER brass SWIVEL brass BODY brass RING white	COVER black SWIVEL black BODY black RING brass	COVER white SWIVEL white BODY white RING brass	COVER black SWIVEL brass BODY brass RING black	COVER white SWIVEL brass BODY brass RING white
	2700K	AWBD 23332◆	AWBD 23331◆			AWBD 22332◆	AWBD 21331◆
	2700K			AWBD 22223◆	AWBD 21113◆		
	3000K	AWBD 33332◆	AWBD 33331◆			AWBD 32332◆	AWBD 31331◆
	3000K			AWBD 32223◆	AWBD 31113◆		
+ honeycomb	**2700K**	AWBD 23332H◆	AWBD 23331H◆			AWBD 22332H◆	AWBD 21331H◆
+ honeycomb	**2700K**			AWBD 22223H◆	AWBD 21113H◆		
+ honeycomb	**3000K**	AWBD 33332H◆	AWBD 33331H◆			AWBD 32332H◆	AWBD 31331H◆
+ honeycomb	**3000K**			AWBD 32223H◆	AWBD 31113H◆		


REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**


gunmetal, bronze and **nickel** combinations on demand



◆ Choose beam:
M=medium 23° or
W=wide 40°


Audette-Duo WD1 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
WALL - IP50



		DIM	BASE brass / SWIVEL brass / BODY brass / RING black	BASE brass / SWIVEL brass / BODY brass / RING white	BASE black / SWIVEL black / BODY black / RING brass	BASE white / SWIVEL white / BODY white / RING brass	BASE black / SWIVEL brass / BODY brass / RING black	BASE white / SWIVEL brass / BODY brass / RING white
	2700K	LC	AWBU 23332◆	AWBU 23331◆				
	2700K	LC			AWBU 22223◆	AWBU 21113◆		
	2700K	LC					AWBU 22332◆	AWBU 21331◆
	3000K	LC	AWBU 33332◆	AWBU 33331◆				
	3000K	LC			AWBU 32223◆	AWBU 31113◆		
	3000K	LC					AWBU 32332◆	AWBU 31331◆
+ honeycomb	**2700K**	LC	AWBU 23332H◆	AWBU 23331H◆				
+ honeycomb	**2700K**	LC			AWBU 22223H◆	AWBU 21113H◆		
+ honeycomb	**2700K**	LC					AWBU 22332H◆	AWBU 21331H◆
+ honeycomb	**3000K**	LC	AWBU 33332H◆	AWBU 33331H◆				
+ honeycomb	**3000K**	LC			AWBU 32223H◆	AWBU 31113H◆		
+ honeycomb	**3000K**	LC					AWBU 32332H◆	AWBU 31331H◆


gunmetal, bronze and **nickel** combinations on demand



Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié W1 in Rounded

500mA - **required remote mounted driver see below**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
WALL - IP50




		COVER black	SWIVEL brass	BODY black	RING black	COVER white	SWIVEL brass	BODY white	RING white
	2700K	AWBI 22322◆				AWBI 21311◆			
	3000K	AWBI 32322◆				AWBI 31311◆			
+ honeycomb	**2700K**	AWBI 22322H◆				AWBI 21311H◆			
+ honeycomb	**3000K**	AWBI 32322H◆				AWBI 31311H◆			

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-4 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié W2 in Rounded

500mA - **required remote mounted driver see below**
2 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95
materials: brass, aluminium
WALL - IP50



		COVER black	SWIVEL brass	BODY black	RING black	COVER white	SWIVEL brass	BODY white	RING white
2700K		AWBD 22322◆				AWBD 21311◆			
3000K		AWBD 32322◆				AWBD 31311◆			
+ honeycomb	**2700K**	AWBD 22322H◆				AWBD 21311H◆			
+ honeycomb	**3000K**	AWBD 32322H◆				AWBD 31311H◆			

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié WD1 up Rounded

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
WALL - IP50



		DIM	BASE black	SWIVEL brass	BODY black	RING black	BASE white	SWIVEL brass	BODY white	RING white
2700K		LC	AWBU 22322◆				AWBU 21311◆			
3000K		LC	AWBU 32322◆				AWBU 31311◆			
+ honeycomb	**2700K**	LC	AWBU 22322H◆				AWBU 21311H◆			
+ honeycomb	**3000K**	LC	AWBU 32322H◆				AWBU 31311H◆			




◆ Choose beam:
M=medium 23° or
W=wide 40°

! driver remote mounting excl.

Audy-Wall 1S

500mA - required remote mounted driver see below
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
WALL - IP50




	FRAME brass / RING brass	FRAME black / RING black	FRAME white / RING white	FRAME gunmetal / RING gunmetal	FRAME bronze / RING bronze	FRAME nickel / RING nickel
2700K	ATWS 1273◆	ATWS 1272◆	ATWS 1271◆			
2700K				ATWS 1274◆	ATWS 1277◆	ATWS 1279◆
3000K	ATWS 1303◆	ATWS 1302◆	ATWS 1301◆			
3000K				ATWS 1304◆	ATWS 1307◆	ATWS 1309◆

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-4 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Choose beam:
M=medium 23° or
W=wide 40°

! driver remote mounting excl.

Audy-Wall 1S Duo

500mA - required remote mounted driver see below
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
materials: brass, aluminium
WALL - IP50




		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K	brass RING		ATWS 1223◆	ATWS 1213◆			
2700K	black RING	ATWS 1232◆					
2700K	white RING	ATWS 1231◆					
2700K	gunmetal RING	ATWS 1234◆					
2700K	bronze RING	ATWS 1237◆					
2700K	brass RING				ATWS 1243◆	ATWS 1773◆	
2700K	nickel RING				ATWS 1749◆		
2700K	gunmetal RING						ATWS 1794◆
3000K	brass RING		ATWS 1323◆	ATWS 1313◆			
3000K	black RING	ATWS 1332◆					
3000K	white RING	ATWS 1331◆					
3000K	gunmetal RING	ATWS 1334◆					
3000K	bronze RING	ATWS 1337◆					
3000K	brass RING				ATWS 1343◆	ATWS 1373◆	
3000K	nickel RING				ATWS 1349◆		
3000K	gunmetal RING						ATWS 1394◆

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-4 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




▲ Choose beam upper lightsource:
M=medium 23° or W=wide 40°

▼ Choose beam lower lightsource:
M=medium 23° or W=wide 40°

! **driver remote mounting excl.**

Audy-Wall 2S

500mA - **required remote mounted driver see below**
2 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95
materials: brass, aluminium
WALL - IP50




	FRAME brass / RING brass	FRAME black / RING black	FRAME white / RING white	FRAME gunmetal / RING gunmetal	FRAME bronze / RING bronze	FRAME nickel / RING nickel
2700K	ATWD 2273 ▲▼	ATWD 2272 ▲▼	ATWD 2271 ▲▼			
2700K				ATWD 2274 ▲▼	ATWD 2277 ▲▼	ATWD 2279 ▲▼
3000K	ATWD 2303 ▲▼	ATWD 2302 ▲▼	ATWD 2301 ▲▼			
3000K				ATWD 2304 ▲▼	ATWD 2307 ▲▼	ATWD 2309 ▲▼

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-4 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




! driver remote mounting excl.

▲ Choose beam upper lightsource:
M=medium 23° or W=wide 40°

▼ Choose beam lower lightsource:
M=medium 23° or W=wide 40°

Audy-Wall 2S Duo

500mA - **required remote mounted driver see below**
2 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (2 x 487lm) or 3000K (2 x 517lm) - CRI >95
materials: brass, aluminium
WALL - IP50



		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K	brass RING		ATWD 2223 ▲▼	ATWD 2213 ▲▼			
2700K	black RING	ATWD 2232 ▲▼					
2700K	white RING	ATWD 2231 ▲▼					
2700K	gunmetal RING	ATWD 2234 ▲▼					
2700K	bronze RING	ATWD 2237 ▲▼					
2700K	brass RING				ATWD 2243 ▲▼	ATWD 2773 ▲▼	
2700K	nickel RING				ATWD 2249 ▲▼		
2700K	gunmetal RING						ATWD 2794 ▲▼


		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
3000K	brass RING		ATWD 2323 ▲▼	ATWD 2313 ▲▼			
3000K	black RING	ATWD 2332 ▲▼					
3000K	white RING	ATWD 2331 ▲▼					
3000K	gunmetal RING	ATWD 2334 ▲▼					
3000K	bronze RING	ATWD 2337 ▲▼					
3000K	brass RING				ATWD 2343 ▲▼	ATWD 2373 ▲▼	
3000K	nickel RING				ATWD 2349 ▲▼		
3000K	gunmetal RING						ATWD 2394 ▲▼

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-4 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

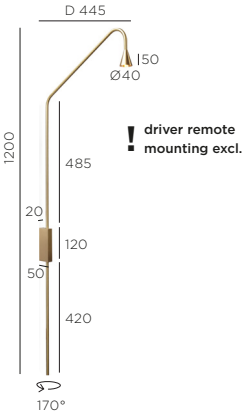

Austere-Wall built-in

350mA - **required remote mounted driver see below**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
material: brass
WALL - IP50


FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
HVWB 1003	HVWB 1002	HVWB 1001	HVWB 1004	HVWB 1007	HVWB 1009

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

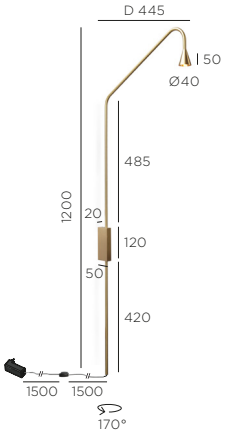

Austere-Wall plug

100V-240V - **plugdriver with** PU **(PUSH-DIM) button dimmer on cable**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
material: brass
WALL - IP50

	DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
EU plug	PU	HVWA 1003	HVWA 1002	HVWA 1001			
EU plug	PU				HVWA 1004	HVWA 1007	HVWA 1009
UK plug	PU	HVWA 1003UK	HVWA 1002UK	HVWA 1001UK			
UK plug	PU				HVWA 1004UK	HVWA 1007UK	HVWA 1009UK
US plug	PU	HVWA 1003US	HVWA 1002US	HVWA 1001US			
US plug	PU				HVWA 1004US	HVWA 1007US	HVWA 1009US
AU plug	PU	HVWA 1003AU	HVWA 1002AU	HVWA 1001AU			
AU plug	PU				HVWA 1004AU	HVWA 1007AU	HVWA 1009AU

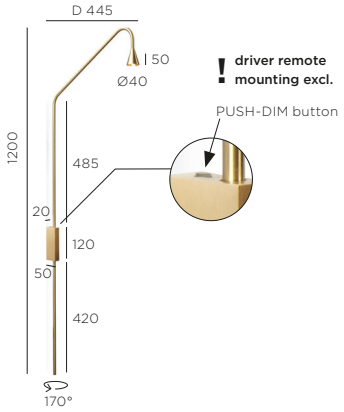

Austere-Wall push built-in


350mA - required remote mounted driver see below - PU **(PUSH-DIM) button on base**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
material: brass
WALL - IP50

DIM		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
PU		HVWT 1003	HVWT 1002	HVWT 1001			
PU					HVWT 1004	HVWT 1007	HVWT 1009

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)**	D 15WPLV	110V-230V
		driver remote: does not fit through cutout hole of fixture	


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

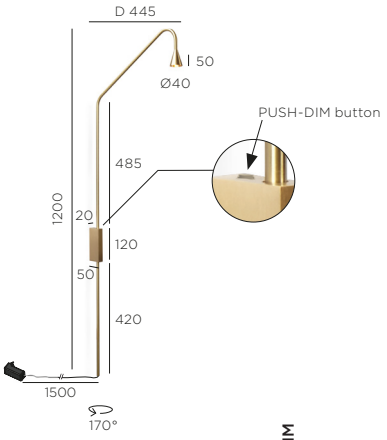

Austere-Wall push plug

100V-240V - **plugdriver** - PU **(PUSH-DIM) button on base**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
material: brass
WALL - IP50


	DIM		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
EU plug	PU		HVWT 1003EU	HVWT 1002EU	HVWT 1001EU			
EU plug	PU					HVWT 1004EU	HVWT 1007EU	HVWT 1009EU
UK plug	PU		HVWT 1003UK	HVWT 1002UK	HVWT 1001UK			
UK plug	PU					HVWT 1004UK	HVWT 1007UK	HVWT 1009UK
US plug	PU		HVWT 1003US	HVWT 1002US	HVWT 1001US			
US plug	PU					HVWT 1004US	HVWT 1007US	HVWT 1009US
AU plug	PU		HVWT 1003AU	HVWT 1002AU	HVWT 1001AU			
AU plug	PU					HVWT 1004AU	HVWT 1007AU	HVWT 1009AU



Bilo W in FROSTED


350mA - **required driver see below**
1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90
*__FALSE wall=__ aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)
*__CONCRETE wall=__ aperture: Ø67 - depth: min. 100mm (driver remote)
materials: aluminium & transparant glass + screen printed inner side
*Required free air area, see **www.trizo21.com/requiredarea - WALL - IP50**

FALSE wall



	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BWIF 2000	BWIF 1000	BWIF 7000	BWIF 8000	BWIF 9000
2700K	BWIF 2020	BWIF 1020	BWIF 7020	BWIF 8020	BWIF 9020

ACCESSORY FOR WALL: PLASTER KIT



Ø200 — aperture: Ø122 | PLBO 2000

CONCRETE wall




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BWIC 2002	BWIC 1002	BWIC 7002	BWIC 8002	BWIC 9002
2700K	BWIC 2022	BWIC 1022	BWIC 7022	BWIC 8022	BWIC 9022

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo W in MATT


350mA - required driver see below
1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90
*__FALSE wall=__ aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)
*__CONCRETE wall=__ aperture: Ø67 - depth: min. 100mm (driver remote)
materials: aluminium & sandblasted glass
*Required free air area, see **www.trizo21.com/requiredarea - WALL - IP50**

FALSE wall



	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BWMF 2000	BWMF 1000	BWMF 7000	BWMF 8000	BWMF 9000
2700K	BWMF 2020	BWMF 1020	BWMF 7020	BWMF 8020	BWMF 9020

ACCESSORY FOR WALL: PLASTER KIT



Ø200 — aperture: Ø122 | PLBO 2000

CONCRETE wall




2300K	BWMC 2002	BWMC 1002	BWMC 7002	BWMC 8002	BWMC 9002
2700K	BWMC 2022	BWMC 1022	BWMC 7022	BWMC 8022	BWMC 9022

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Boulo W in FROSTED


350mA - **required driver see below**
1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90
*__FALSE wall=__ aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)
*__CONCRETE wall=__ aperture: Ø67 - depth: min. 100mm (driver remote)
materials: transparant glass + screen printed inner side
*Required free air area, see **www.trizo21.com/requiredarea - WALL** - **IP50**

FALSE wall




FALSE wall	**2300K**	BLWII 1100	
FALSE wall	**2700K**	BLWII 1120	

ACCESSORY FOR WALL: PLASTER KIT



Ø200 — aperture: Ø122 | PLBO 2000 | €75

CONCRETE wall




CONCRETE wall	**2300K**	BLWII 1102	
CONCRETE wall	**2700K**	BLWII 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Boulo W in MATT


350mA - **required driver see below**
1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90
*__FALSE wall=__ aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)
*__CONCRETE wall=__ aperture: Ø67 - depth: min. 100mm (driver remote)
material: sandblasted glass
*Required free air area, see **www.trizo21.com/requiredarea - WALL** - **IP50**

FALSE wall



FALSE wall	**2300K**	BLWIM 1100	
FALSE wall	**2700K**	BLWIM 1120	


ACCESSORY FOR WALL: PLASTER KIT



Ø200

aperture: Ø122 | PLBO 2000 |

CONCRETE wall



CONCRETE wall	**2300K**	BLWIM 1102	
CONCRETE wall	**2700K**	BLWIM 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V


driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bouly W/C

350mA - required driver see below
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
depth: min. 75mm (driver in ceiling/wall)
materials: aluminium & PMMA
WALL & CEILING - IP50



FRAME black	FRAME white	FRAME grey	FRAME chrome
BOWW 1002	BOWW 1001	BOWW 1003	BOWW 1009

REQUIRED DRIVER


DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 5W	230V
1 x	LC **(TRIAC/IGBT)**	D 3WT	110V-230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-3 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-3 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-8 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V
		driver remote: does not fit through cutout hole of fixture	

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Bouly W/C D+B

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
depth: min. 75mm (driver in ceiling/wall)
materials: aluminium & PMMA
WALL & CEILING - IP50



FRAME black	FRAME white	FRAME grey	FRAME chrome
BOWW 1102	BOWW 1101	BOWW 1103	BOWW 1109



Code W G9


230V G9 - 1 x HALO QT14 max. 60W or 1 x G9 LED (max. Ø19, max. L 62mm)
material: aluminium
Bulb excluded - WALL - IP50

	FRAME black	FRAME white	FRAME alu	FRAME bronze	FRAME chrome
230V - G9 HALO	CODE 2005	CODE 1005			
230V - G9 HALO			CODE 3005	CODE 7005	
230V - G9 HALO					CODE 9005
230V - G9 LED	CODE L2005	CODE L1005			
230V - G9 LED			CODE L3005	CODE L7005	
230V - G9 LED					CODE L9005

OPTIONAL COVER FOR CODE W



ACDE 2005	ACDE 1005			
		ACDE 3005	ACDE 7005	
				ACDE 9005



Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

! **driver remote mounting excl. driver does not fit through cutout hole of fixture**

Code W LED

350mA - **required remote mounted driver see below**

1 lighting side: 1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93

2 lighting sides: 2 x 4 LED 0,96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93

material: aluminium

WALL - IP50

	FRAME black	FRAME white	FRAME alu	FRAME bronze	FRAME chrome
1 side	CODE 2555◆	CODE 1555◆			
2 sides	CODE 2666◆	CODE 1666◆			
1 side			CODE 3555◆	CODE 7555◆	
2 sides			CODE 3666◆	CODE 7666◆	
1 side					CODE 9555◆
2 sides					CODE 9666◆

OPTIONAL COVER FOR CODE W LED



ACDE 2005	ACDE 1005			
		ACDE 3005	ACDE 7005	
				ACDE 9005


REQUIRED REMOTE MOUNTED DRIVER

DEVICE		DIM.	DRIVER	VOLT
1 x	1 side	LC **(TRIAC/IGBT)**	D 3WT«	230V
1 x	1 side	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP«	230V
2 x	1 side	LC **(TRIAC/IGBT)**	D 10WT«	230V
1-3 x	1 side	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP«	110V-230V
1-3 x	1 side	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU«	230V
1-3 x	1 side	DA **(DALI)**	D 15WDA EU-US«	110V-230V
2-8 x	1 side	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V
1 x	2 sides	LC **(TRIAC/IGBT)**	D 10WT«	230V
1 x	2 sides	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP«	110V-230V
1 x	2 sides	DA **(DALI)**	D 15WDA«	110V-230V
1-4 x	2 sides	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

«driver fits behind optional cover for CODE W LED

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Scar-Leather 1FD built-in


110V-230V - **remote driver included: driver does not fit through cutout hole of fixture** - NO **(non-dimmable)**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
or
230V - **remote driver included: driver does not fit through cutout hole of fixture** - 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
materials: brass, leather
WALL - **IP50**

	FLEX LENGTH	DIM	LEATHER tabacco / FRAME brass	LEATHER saddle / FRAME brass	LEATHER ivory / FRAME brass	LEATHER oak / FRAME brass
no dim	L 500	NO	SCLEBI 5330 TAB	SCLEBI 5330 SAD	SCLEBI 5330 IVO	SCLEBI 5330 OAK
dim	L 500	1-10 PU	SCLEBI 5330P TAB	SCLEBI 5330P SAD	SCLEBI 5330P IVO	SCLEBI 5330P OAK
dim	L 500	DA	SCLEBI 5330D TAB	SCLEBI 5330D SAD	SCLEBI 5330D IVO	SCLEBI 5330D OAK

	FLEX LENGTH	DIM	LEATHER tabacco / FRAME gunmetal	LEATHER saddle / FRAME gunmetal	LEATHER ivory / FRAME gunmetal	LEATHER oak / FRAME gunmetal
no dim	L 500	NO	SCLEBI 5440 TAB	SCLEBI 5440 SAD	SCLEBI 5440 IVO	SCLEBI 5440 OAK
dim	L 500	1-10 PU	SCLEBI 5440P TAB	SCLEBI 5440P SAD	SCLEBI 5440P IVO	SCLEBI 5440P OAK
dim	L 500	DA	SCLEBI 5440D TAB	SCLEBI 5440D SAD	SCLEBI 5440D IVO	SCLEBI 5440D OAK

	FLEX LENGTH	DIM	LEATHER tabacco / FRAME bronze	LEATHER saddle / FRAME bronze	LEATHER ivory / FRAME bronze	LEATHER oak / FRAME bronze
no dim	L 500	NO	SCLEBI 5770 TAB	SCLEBI 5770 SAD	SCLEBI 5770 IVO	SCLEBI 5770 OAK
dim	L 500	1-10 PU	SCLEBI 5770P TAB	SCLEBI 5770P SAD	SCLEBI 5770P IVO	SCLEBI 5770P OAK
dim	L 500	DA	SCLEBI 5770D TAB	SCLEBI 5770D SAD	SCLEBI 5770D IVO	SCLEBI 5770D OAK

	FLEX LENGTH	DIM	LEATHER tabacco / FRAME nickel	LEATHER saddle / FRAME nickel	LEATHER ivory / FRAME nickel	LEATHER oak / FRAME nickel
no dim	L 500	NO	SCLEBI 5990 TAB	SCLEBI 5990 SAD	SCLEBI 5990 IVO	SCLEBI 5990 OAK
dim	L 500	1-10 PU	SCLEBI 5990P TAB	SCLEBI 5990P SAD	SCLEBI 5990P IVO	SCLEBI 5990P OAK
dim	L 500	DA	SCLEBI 5990D TAB	SCLEBI 5990D SAD	SCLEBI 5990D IVO	SCLEBI 5990D OAK



Scar-Leather 1FDS built-in


230V - **remote driver included: driver does not fit through cutout hole of fixture** - PU **(PUSH-DIM) on armature**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
materials: brass, leather
WALL - **IP50**

FLEX LENGTH	DIM	LEATHER tabacco / FRAME brass	LEATHER saddle / FRAME brass	LEATHER ivory / FRAME brass	LEATHER oak / FRAME brass
dim	L 500	PU	SCLEBI 5331P TAB	SCLEBI 5331P SAD	SCLEBI 5331P IVO	SCLEBI 5331P OAK

FLEX LENGTH	DIM	LEATHER tabacco / FRAME gunmetal	LEATHER saddle / FRAME gunmetal	LEATHER ivory / FRAME gunmetal	LEATHER oak / FRAME gunmetal
dim	L 500	PU	SCLEBI 5441P TAB	SCLEBI 5441P SAD	SCLEBI 5441P IVO	SCLEBI 5441P OAK

FLEX LENGTH	DIM	LEATHER tabacco / FRAME bronze	LEATHER saddle / FRAME bronze	LEATHER ivory / FRAME bronze	LEATHER oak / FRAME bronze
dim	L 500	PU	SCLEBI 5771P TAB	SCLEBI 5771P SAD	SCLEBI 5771P IVO	SCLEBI 5771P OAK

FLEX LENGTH	DIM	LEATHER tabacco / FRAME nickel	LEATHER saddle / FRAME nickel	LEATHER ivory / FRAME nickel	LEATHER oak / FRAME nickel
dim	L 500	PU	SCLEBI 5991P TAB	SCLEBI 5991P SAD	SCLEBI 5991P IVO	SCLEBI 5991P OAK



Scar-Leather 1FD built-up


230V - **driver included in base** - NO **(non-dimmable)**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
materials: brass, leather
WALL - **IP50**

FLEX LENGTH	DIM	LEATHER tabacco / FRAME brass	LEATHER saddle / FRAME brass	LEATHER ivory / FRAME brass	LEATHER oak / FRAME brass
no dim	L 500	NO	SCLEBU 5330 TAB	SCLEBU 5330 SAD	SCLEBU 5330 IVO	SCLEBU 5330 OAK

FLEX LENGTH	DIM	LEATHER tabacco / FRAME gunmetal	LEATHER saddle / FRAME gunmetal	LEATHER ivory / FRAME gunmetal	LEATHER oak / FRAME gunmetal
no dim	L 500	NO	SCLEBU 5440 TAB	SCLEBU 5440 SAD	SCLEBU 5440 IVO	SCLEBU 5440 OAK

FLEX LENGTH	DIM	LEATHER tabacco / FRAME bronze	LEATHER saddle / FRAME bronze	LEATHER ivory / FRAME bronze	LEATHER oak / FRAME bronze
no dim	L 500	NO	SCLEBU 5770 TAB	SCLEBU 5770 SAD	SCLEBU 5770 IVO	SCLEBU 5770 OAK

FLEX LENGTH	DIM	LEATHER tabacco / FRAME nickel	LEATHER saddle / FRAME nickel	LEATHER ivory / FRAME nickel	LEATHER oak / FRAME nickel
no dim	L 500	NO	SCLEBU 5990 TAB	SCLEBU 5990 SAD	SCLEBU 5990 IVO	SCLEBU 5990 OAK



Scar-Leather 1FDS built-up


230V - **driver included in base** - NO **ON/OFF armature**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
materials: brass, leather
WALL - **IP50**

FLEX LENGTH	DIM	LEATHER tabacco / FRAME brass	LEATHER saddle / FRAME brass	LEATHER ivory / FRAME brass	LEATHER oak / FRAME brass
no dim	L 500	NO	SCLEBU 5331 TAB	SCLEBU 5331 SAD	SCLEBU 5331 IVO	SCLEBU 5331 OAK

FLEX LENGTH	DIM	LEATHER tabacco / FRAME gunmetal	LEATHER saddle / FRAME gunmetal	LEATHER ivory / FRAME gunmetal	LEATHER oak / FRAME gunmetal
no dim	L 500	NO	SCLEBU 5441 TAB	SCLEBU 5441 SAD	SCLEBU 5441 IVO	SCLEBU 5441 OAK

FLEX LENGTH	DIM	LEATHER tabacco / FRAME bronze	LEATHER saddle / FRAME bronze	LEATHER ivory / FRAME bronze	LEATHER oak / FRAME bronze
no dim	L 500	NO	SCLEBU 5771 TAB	SCLEBU 5771 SAD	SCLEBU 5771 IVO	SCLEBU 5771 OAK

FLEX LENGTH	DIM	LEATHER tabacco / FRAME nickel	LEATHER saddle / FRAME nickel	LEATHER ivory / FRAME nickel	LEATHER oak / FRAME nickel
no dim	L 500	NO	SCLEBU 5991 TAB	SCLEBU 5991 SAD	SCLEBU 5991 IVO	SCLEBU 5991 OAK




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Scar-Led 1FD built-in 45

110V-230V - **remote driver included: driver does not fit through cutout hole of fixture** - NO **(non-dimmable)**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
or
230V - **remote driver included: driver does not fit through cutout hole of fixture** - 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
materials: aluminium, silicon
WALL - IP50

	FLEX LENGTH	DIM	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX black silicon / FRAME alu	FLEX alu / FRAME alu	FLEX bronze / FRAME bronze
no dim	L 200	NO	SCAR 4281◆	SCAR 4271◆	SCAR 4201◆	SCAR 4251◆	SCAR 4231◆
no dim	L 400	NO	SCAR 4481◆	SCAR 4471◆	SCAR 4401◆	SCAR 4451◆	SCAR 4431◆
no dim	L 750	NO	SCAR 4781◆	SCAR 4771◆	SCAR 4701◆	SCAR 6711◆	SCAR 6731◆
dim	L 200	1-10 PU	SCAR 4281P◆	SCAR 4271P◆	SCAR 4201P◆	SCAR 4251P◆	SCAR 4231P◆
dim	L 400	1-10 PU	SCAR 4481P◆	SCAR 4471P◆	SCAR 4401P◆	SCAR 4451P◆	SCAR 4431P◆
dim	L 750	1-10 PU	SCAR 4781P◆	SCAR 4771P◆	SCAR 4701P◆	SCAR 6711P◆	SCAR 6731P◆
dim	L 200	DA	SCAR 4281D◆	SCAR 4271D◆	SCAR 4201D◆	SCAR 4251D◆	SCAR 4231D◆
dim	L 400	DA	SCAR 4481D◆	SCAR 4471D◆	SCAR 4401D◆	SCAR 4451D◆	SCAR 4431D◆
dim	L 750	DA	SCAR 4781D◆	SCAR 4771D◆	SCAR 4701D◆	SCAR 6711D◆	SCAR 6731D◆




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Scar-Led 1FD built-in 60

110V-230V - **remote driver included: driver fits through cutout hole of fixture** - NO **(non-dimmable)**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
aperture: 25 x 45mm - depth for driver behind fixture: min. 55mm
or
230V - **remote driver included: driver fits through cutout hole of fixture, except DALI does not fit** - 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
aperture: 25 x 55mm - depth for driver behind fixture: min. 72 mm
materials: aluminium, silicon
WALL - IP50

	FLEX LENGTH	DIM	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX black silicon / FRAME alu	FLEX alu / FRAME alu	FLEX bronze / FRAME bronze
no dim	L 200	NO	SCAR 7281◆	SCAR 7271◆	SCAR 7201◆	SCAR 7251◆	SCAR 7231◆
no dim	L 400	NO	SCAR 7481◆	SCAR 7471◆	SCAR 7401◆	SCAR 7451◆	SCAR 7431◆
no dim	L 750	NO	SCAR 7781◆	SCAR 7771◆	SCAR 7701◆	SCAR 7751◆	SCAR 7731◆
dim	L 200	1-10 PU	SCAR 7281P◆	SCAR 7271P◆	SCAR 7201P◆	SCAR 7251P◆	SCAR 7231P◆
dim	L 400	1-10 PU	SCAR 7481P◆	SCAR 7471P◆	SCAR 7401P◆	SCAR 7451P◆	SCAR 7431P◆
dim	L 750	1-10 PU	SCAR 7781P◆	SCAR 7771P◆	SCAR 7701P◆	SCAR 7751P◆	SCAR 7731P◆
dim	L 200	DA	SCAR 7281D◆	SCAR 7271D◆	SCAR 7201D◆	SCAR 7251D◆	SCAR 7231D◆
dim	L 400	DA	SCAR 7481D◆	SCAR 7471D◆	SCAR 7401D◆	SCAR 7451D◆	SCAR 7431D◆
dim	L 750	DA	SCAR 7781D◆	SCAR 7771D◆	SCAR 7701D◆	SCAR 7751D◆	SCAR 7731D◆




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Scar-Led 1FDS built-in 60

110V-230V - **remote driver included: driver fits through cutout hole of fixture** - NO **ON/OFF armature**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
aperture: 25 x 45mm - depth for driver behind fixture: min. 55mm
or
230V - **remote driver included: driver fits through cutout hole of fixture** - PU **(PUSH-DIM) on armature**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
aperture: 25 x 55mm - depth for driver behind fixture: min. 72mm
materials: aluminium, silicon
WALL - IP50

	FLEX LENGTH	DIM	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX black silicon / FRAME alu	FLEX alu / FRAME alu	FLEX bronze / FRAME bronze
no dim	L 200	NO	SCAR 7291◆	SCAR 7261◆	SCAR 7211◆	SCAR 7252◆	SCAR 7241◆
no dim	L 400	NO	SCAR 7491◆	SCAR 7461◆	SCAR 7411◆	SCAR 7452◆	SCAR 7441◆
no dim	L 750	NO	SCAR 7791◆	SCAR 7761◆	SCAR 7711◆	SCAR 7752◆	SCAR 7741◆
dim	L 200	PU	SCAR 7291P◆	SCAR 7261P◆	SCAR 7211P◆	SCAR 7252P◆	SCAR 7241P◆
dim	L 400	PU	SCAR 7491P◆	SCAR 7461P◆	SCAR 7411P◆	SCAR 7452P◆	SCAR 7441P◆
dim	L 750	PU	SCAR 7791P◆	SCAR 7761P◆	SCAR 7711P◆	SCAR 7752P◆	SCAR 7741P◆




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Scar-Led 1FD built-in 95

110V-230V - **remote driver included: driver fits through cutout hole of fixture** - NO **(non-dimmable)**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
aperture: 25 x 45mm - depth for driver behind fixture: min. 55mm
or
230V - **remote driver included: driver fits through cutout hole of fixture** - 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
aperture: 25 x 55mm - depth for driver behind fixture: min. 72mm
materials: aluminium, silicon
WALL - IP50

	FLEX LENGTH	DIM	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX black silicon / FRAME alu	FLEX alu / FRAME alu	FLEX bronze / FRAME bronze
no dim	L 200	NO	SCAR 8281◆	SCAR 8271◆	SCAR 8211◆	SCAR 8251◆	SCAR 8231◆
no dim	L 400	NO	SCAR 8481◆	SCAR 8471◆	SCAR 8411◆	SCAR 8451◆	SCAR 8431◆
no dim	L 750	NO	SCAR 8781◆	SCAR 8771◆	SCAR 8711◆	SCAR 8751◆	SCAR 8731◆
dim	L 200	1-10 PU	SCAR 8281P◆	SCAR 8271P◆	SCAR 8211P◆	SCAR 8251P◆	SCAR 8231P◆
dim	L 400	1-10 PU	SCAR 8481P◆	SCAR 8471P◆	SCAR 8411P◆	SCAR 8451P◆	SCAR 8431P◆
dim	L 750	1-10 PU	SCAR 8781P◆	SCAR 8771P◆	SCAR 8711P◆	SCAR 8751P◆	SCAR 8731P◆
dim	L 200	DA	SCAR 8281D◆	SCAR 8271D◆	SCAR 8211D◆	SCAR 8251D◆	SCAR 8231D◆
dim	L 400	DA	SCAR 8481D◆	SCAR 8471D◆	SCAR 8411D◆	SCAR 8451D◆	SCAR 8431D◆
dim	L 750	DA	SCAR 8781D◆	SCAR 8771D◆	SCAR 8711D◆	SCAR 8751D◆	SCAR 8731D◆




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Scar-Led 1FDS built-in 95

110V-230V - **remote driver included: driver fits through cutout hole of fixture** - NO **ON/OFF armature**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
aperture: 25 x 45mm - depth for driver behind fixture: min. 55mm
or
230V - **remote driver included: driver fits through cutout hole of fixture** - PU **(PUSH-DIM) on armature**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
aperture: 25 x 55mm - depth for driver behind fixture: min. 72mm
materials: aluminium, silicon
WALL - IP50

FLEX LENGTH	DIM	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX black silicon / FRAME alu	FLEX alu / FRAME alu	FLEX bronze / FRAME bronze
no dim L 200	NO	SCAR 9281◆	SCAR 9271◆	SCAR 9211◆	SCAR 9251◆	SCAR 9231◆
no dim L 400	NO	SCAR 9481◆	SCAR 9471◆	SCAR 9411◆	SCAR 9451◆	SCAR 9431◆
no dim L 750	NO	SCAR 9781◆	SCAR 9771◆	SCAR 9711◆	SCAR 9751◆	SCAR 9731◆
dim L 200	1-10 PU	SCAR 9281P◆	SCAR 9271P◆	SCAR 9211P◆	SCAR 9251P◆	SCAR 9231P◆
dim L 400	1-10 PU	SCAR 9481P◆	SCAR 9471P◆	SCAR 9411P◆	SCAR 9451P◆	SCAR 9431P◆
dim L 750	1-10 PU	SCAR 9781P◆	SCAR 9771P◆	SCAR 9711P◆	SCAR 9751P◆	SCAR 9731P◆




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Scar-Led 1FD built-up

110V-230V - **driver included in base** - NO **(non-dimmable)**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
materials: aluminium, silicon
WALL - IP50

FLEX LENGTH	DIM	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX black silicon / FRAME alu	FLEX alu / FRAME alu	FLEX bronze / FRAME bronze
no dim L 200	NO	SCAR 4831◆	SCAR 4731◆	SCAR 4331◆	SCAR 4531◆	SCAR 4031◆
no dim L 400	NO	SCAR 4861◆	SCAR 4761◆	SCAR 4361◆	SCAR 4561◆	SCAR 4061◆
no dim L 750	NO	SCAR 4811◆	SCAR 4711◆	SCAR 4311◆	SCAR 4511◆	SCAR 4011◆




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Scar-Led 1FDS built-up

110V-230V - **driver included in base** - NO **ON/OFF armature**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
materials: aluminium, silicon
WALL - IP50

FLEX LENGTH	DIM	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX black silicon / FRAME alu	FLEX alu / FRAME alu	FLEX bronze / FRAME bronze
no dim L 200	NO	SCAR 4835◆	SCAR 4735◆	SCAR 4335◆	SCAR 4535◆	SCAR 4035◆
no dim L 400	NO	SCAR 4865◆	SCAR 4765◆	SCAR 4365◆	SCAR 4565◆	SCAR 4065◆
no dim L 750	NO	SCAR 4875◆	SCAR 4775◆	SCAR 4375◆	SCAR 4575◆	SCAR 4075◆




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Scar-Led 1FDS built-up plug

110V-230V - **driver included in base** - **EU-plug** - NO **ON/OFF on armature**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
materials: aluminium, silicon
WALL - IP50

	FLEX LENGTH	DIM		FLEX black silicon ● / FRAME black ●	FLEX white silicon ○ / FRAME white ○	FLEX black silicon ● / FRAME alu ◐	FLEX alu ◐ / FRAME alu ◐	FLEX bronze ● / FRAME bronze ●	
no dim	L 200	NO	I	SCAR 4835EU◆	SCAR 4735EU◆	SCAR 4335EU◆	SCAR 4535EU◆	SCAR 4035EU◆	I
no dim	L 400	NO	I	SCAR 4865EU◆	SCAR 4765EU◆	SCAR 4365EU◆	SCAR 4565EU◆	SCAR 4065EU◆	I
no dim	L 750	NO	I	SCAR 4875EU◆	SCAR 4775EU◆	SCAR 4375EU◆	SCAR 4575EU◆	SCAR 4075EU◆	I



Scar-Lite 1FD built-in

110V-230V - **remote driver included: driver fits through cutout hole of fixture** - NO **(non-dimmable)**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
aperture: 25 x 45mm - depth for driver behind fixture: min. 55mm
or
230V - **remote driver included: driver fits through cutout hole of fixture** - 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
aperture: 25 x 55mm - depth for driver behind fixture: min. 72mm
materials: aluminium, silicon
WALL - IP50


	FLEX LENGTH	DIM		FLEX black silicon ● / FRAME black ●	FLEX white silicon ○ / FRAME white ○	FLEX bronze ● / FRAME bronze ●	
no dim	L 500	NO	I	SCLI 7581	SCLI 7571	SCLI 7531	I
dim	L 500	1-10 PU	I	SCLI 7581P	SCLI 7571P	SCLI 7531P	I
dim	L 500	DA	I	SCLI 7581D	SCLI 7571D	SCLI 7531D	I



Scar-Lite 1FDS built-in

110V-230V - **remote driver included: driver fits through cutout hole of fixture** - NO **ON/OFF on armature**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
aperture: 25 x 45mm - depth for driver behind fixture: min. 55mm
or
230V - **remote driver included: driver fits through cutout hole of fixture** - PU **(PUSH-DIM) on armature**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
aperture: 25 x 55mm - depth for driver behind fixture: min. 72mm
materials: aluminium, silicon
WALL - IP50


	FLEX LENGTH	DIM		FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX bronze / FRAME bronze	
no dim	L 500	NO	I	SCLI 7591	SCLI 7561	SCLI 7501	I
dim	L 500	PU	I	SCLI 7591P	SCLI 7561P	SCLI 7501P	I



Scar-Lite 1FDS built-up

110V-230V - **driver in base** - NO **ON/OFF on armature**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
or
230V - **driver in base** - PU **(PUSH-DIM) on armature**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
materials: aluminium, silicon
WALL - IP50


	FLEX LENGTH	DIM		FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX bronze / FRAME bronze	
no dim	L 500	NO	I	SCLI 3502	SCLI 3501	SCLI 3507	I
dim	L 500	PU	I	SCLI 5002	SCLI 5001	SCLI 5007	I



Scar-Lite 1FDS USB built-up

110V-230V - **driver in base**- PU **(PUSH-DIM) on armature**
USB charger 5V incl. - compatible with tablets/smartphones and other USB chargeable devices
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
materials: aluminium, silicon
WALL - IP40


	FLEX LENGTH	DIM	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX bronze / FRAME bronze
no dim	L 500	PU	SCLIU 5002	SCLIU 5001	SCLIU 5007



Scar-Lite 1FDS built-up plug

110V-230V - **driver in base - EU-plug** - NO **ON/OFF on armature**
1 x LED 0,96W **(LED incl.)** - 350mA - 114lm - 2700K - CRI >93
or
230V - **driver in base - EU-plug** - PU **(PUSH-DIM) on armature**
1 x LED 1,38W **(LED incl.)** - 500mA - 157lm - 2700K - CRI >93
materials: aluminium, silicon
WALL - IP50


	FLEX LENGTH	DIM	FLEX black silicon / FRAME black	FLEX white silicon / FRAME white	FLEX bronze / FRAME bronze
no dim	L 500	NO	SCLI 3502EU	SCLI 3501EU	SCLI 3507EU
dim	L 500	PU	SCLI 5002EU	SCLI 5001EU	SCLI 5007EU



Sirens W diffuser glass

110V-230V
E27 - only energy saving bulbs (LED or FLUO)
bulb size for **Ø210: max. Ø45mm L 115mm,** for **Ø265: max. Ø60mm L 175mm**
materials: copper, diffuser glass
LED or FLUO bulb excluded - WALL - IP50

	FRAME black	FRAME white	FRAME copper
Ø210	SIPR 2112	SIPR 2111	
Ø265	SIPR 2612	SIPR 2611	
Ø210			SIPR 2117
Ø265			SIPR 2617



Sirens W mirror

WALL
materials: copper, mirror glass


	FRAME black	FRAME white	FRAME copper
Ø161	SIPR 1602	SIPR 1601	
Ø210	SIPR 2102	SIPR 2101	
Ø265	SIPR 2602	SIPR 2601	
Ø161			SIPR 1607
Ø210			SIPR 2107
Ø265			SIPR 2607



Sirens W frosted glass big mirror + edge mirror

110V-230V
E27 - only energy saving bulbs (LED or FLUO)
bulb size for **Ø210: max. Ø45mm L 115mm,** for **Ø265: max. Ø60mm L 175mm**
materials: copper, frosted glass, mirror glass
LED or FLUO bulb excluded - WALL - IP50


	FRAME black	FRAME white	FRAME copper
Ø210	SIPR 2122	SIPR 2121	
Ø265	SIPR 2622	SIPR 2621	
Ø210			SIPR 2127
Ø265			SIPR 2627



Sirens W frosted glass small mirror + edge mirror

110V-230V
E27 - only energy saving bulbs (LED or FLUO)
bulb size for **Ø210: max. Ø45mm L 115mm,** for **Ø265: max. Ø60mm L 175mm**
materials: copper, frosted glass, mirror glass
LED or FLUO bulb excluded - WALL - IP50

	FRAME black	FRAME white	FRAME copper
Ø210	SIPR 2132	SIPR 2131	
Ø265	SIPR 2632	SIPR 2631	
Ø210			SIPR 2137
Ø265			SIPR 2637



Sirens W frosted glass edge mirror

110V-230V
E27 - only energy saving bulbs (LED or FLUO)
bulb size for **Ø210: max. Ø45mm L 115mm,** for **Ø265: max. Ø60mm L 175mm**
materials: copper, frosted glass, mirror glass
LED or FLUO bulb excluded - WALL - IP50

	FRAME black	FRAME white	FRAME copper
Ø210	SIPR 2142	SIPR 2141	
Ø265	SIPR 2642	SIPR 2641	
Ø210			SIPR 2147
Ø265			SIPR 2647

Suspension




AUDY-SOLITAIRE

Audy-Solitaire RF 138
Audy-Solitaire RF D+B 139
Audy-Solitaire RL 140
Audy-Solitaire RL D+B 141




AUSTERE-CHANDELIER 2Y

Design your own CHANDELIER 142
Austere-Chandelier 2Y RF 75 remote 150
Austere-Chandelier 2Y RF 100 remote 151
Austere-Chandelier 2Y RS 16 remote 152
Austere-Chandelier 2Y RL 79 remote 153
Austere-Chandelier 2Y RS 16 surface 154
Austere-Chandelier 2Y RL 79 surface 155

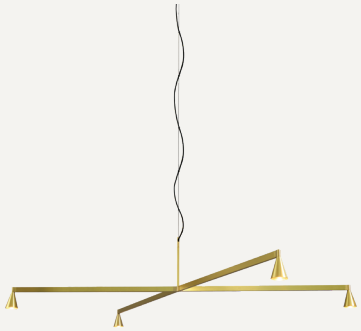


AUSTERE-CHANDELIER 1X

Design your own CHANDELIER 142
Austere-Chandelier 1X RF 75 remote 162
Austere-Chandelier 1X RF 100 remote 163
Austere-Chandelier 1X RS 16 remote 164
Austere-Chandelier 1X RL 79 remote 165
Austere-Chandelier 1X RS 16 surface 166
Austere-Chandelier 1X RL 79 surface 167




AUSTERE-CHANDELIER 1Y

Design your own CHANDELIER 142
Austere-Chandelier 1Y RF 75 remote 144
Austere-Chandelier 1Y RF 100 remote 145
Austere-Chandelier 1Y RS 16 remote 146
Austere-Chandelier 1Y RL 79 remote 147
Austere-Chandelier 1Y RS 16 surface 148
Austere-Chandelier 1Y RL 79 surface 149

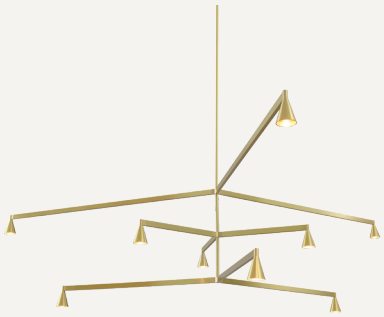

AUSTERE-CHANDELIER 3Y


Design your own CHANDELIER 142
Austere-Chandelier 3Y RF 75 remote 156
Austere-Chandelier 3Y RF 100 remote 157
Austere-Chandelier 3Y RS 16 remote 158
Austere-Chandelier 3Y RL 79 remote 159
Austere-Chandelier 3Y RS 16 surface 160
Austere-Chandelier 3Y RL 79 surface 161

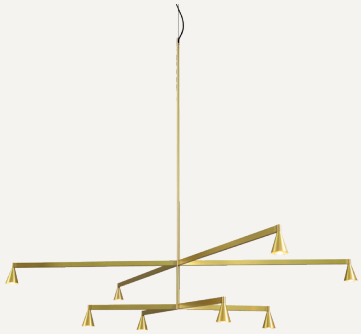

AUSTERE-CHANDELIER 2X

Design your own CHANDELIER 142
Austere-Chandelier 2X RF 75 remote 168
Austere-Chandelier 2X RF 100 remote 169
Austere-Chandelier 2X RS 16 remote 170
Austere-Chandelier 2X RL 79 remote 171
Austere-Chandelier 2X RS 16 surface 172
Austere-Chandelier 2X RL 79 surface 173

Suspension

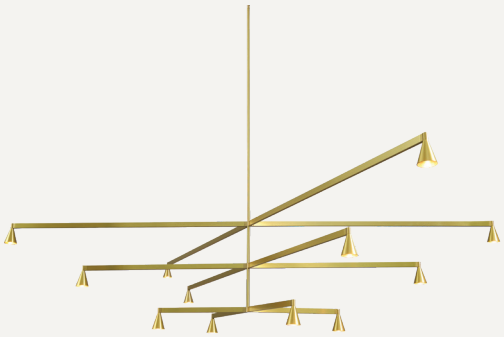

AUSTERE-CHANDELIER 3X

Design your own CHANDELIER	**142**
Austere-Chandelier 3X RF 75 remote	**174**
Austere-Chandelier 3X RF 100 remote	**175**
Austere-Chandelier 3X RS 16 remote	**176**
Austere-Chandelier 3X RL 79 remote	**177**
Austere-Chandelier 3X RS 16 surface	**178**
Austere-Chandelier 3X RL 79 surface	**179**



AUSTERE-SOLITAIRE

Austere-Solitaire RF	**183**
Austere-Solitaire RF D+B	**183**
Austere-Solitaire RL	**184**
Austere-Solitaire RL D+B	**184**



I-TRO

I-Tro	**194**
I-Tro D+B	**194**




N-TRO

N-Tro	**195**
N-Tro D+B	**195**



AUSTERE-SUSPENSION 1+

Design your own SUSPENSION	**186**
Austere-Suspension 1+ RF 75 remote	**188**
Austere-Suspension 1+ RF 100 remote	**189**
Austere-Suspension 1+ RS 16 remote	**190**
Austere-Suspension 1+ RL 79 remote	**191**
Austere-Suspension 1+ RS 16 surface	**192**
Austere-Suspension 1+ RL 79 surface	**193**




AUSTERE-D

Austere-D1 3 RF 75	**180**
Austere-D1 3 RF 100	**180**
Austere-D2 5 RF 75	**181**
Austere-D2 5 RF 100	**181**
Austere-D1 3 RL 79	**182**
Austere-D2 5 RL 79	**182**



SIRENS SU

Sirens SU diffuser glass	**196**
Sirens SU mirror	**196**
Sirens SU frosted glass big mirror + edge mirror	**196**
Sirens SU frosted glass small mirror + edge mirror	**197**
Sirens SU frosted glass edge mirror	**197**



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audy-Solitaire RF


RF= fixed vertical rod 988mm (possibility to shorten with tube cutter)
350mA - **required driver see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
material: brass
SUSPENSION - IP40

FALSE ceiling



		COVER brass / FRAME brass	COVER black / FRAME black	COVER white / FRAME white	COVER gunmetal / FRAME gunmetal	COVER bronze / FRAME bronze	COVER nickel / FRAME nickel
	2700K	AUSF 1203◆					
	2700K		AUSF 1202◆	AUSF 1201◆			
	2700K				AUSF 1204◆	AUSF 1207◆	AUSF 1209◆
	3000K	AUSF 1303◆					
	3000K		AUSF 1302◆	AUSF 1301◆			
	3000K				AUSF 1304◆	AUSF 1307◆	AUSF 1309◆
+ honeycomb	2700K	AUSF 1203H◆					
+ honeycomb	2700K		AUSF 1202H◆	AUSF 1201H◆			
+ honeycomb	2700K				AUSF 1204H◆	AUSF 1207H◆	AUSF 1209H◆
+ honeycomb	3000K	AUSF 1303H◆					
+ honeycomb	3000K		AUSF 1302H◆	AUSF 1301H◆			
+ honeycomb	3000K				AUSF 1304H◆	AUSF 1307H◆	AUSF 1309H◆

CONCRETE ceiling




		COVER brass / FRAME brass	COVER black / FRAME black	COVER white / FRAME white	COVER gunmetal / FRAME gunmetal	COVER bronze / FRAME bronze	COVER nickel / FRAME nickel
	2700K	AUSC 1203◆					
	2700K		AUSC 1202◆	AUSC 1201◆			
	2700K				AUSC 1204◆	AUSC 1207◆	AUSC 1209◆
	3000K	AUSC 1303◆					
	3000K		AUSC 1302◆	AUSC 1301◆			
	3000K				AUSC 1304◆	AUSC 1307◆	AUSC 1309◆
+ honeycomb	2700K	AUSC 1203H◆					
+ honeycomb	2700K		AUSC 1202H◆	AUSC 1201H◆			
+ honeycomb	2700K				AUSC 1204H◆	AUSC 1207H◆	AUSC 1209H◆
+ honeycomb	3000K	AUSC 1303H◆					
+ honeycomb	3000K		AUSC 1302H◆	AUSC 1301H◆			
+ honeycomb	3000K				AUSC 1304H◆	AUSC 1307H◆	AUSC 1309H◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆ Choose beam:
M=medium 23° or
W=wide 40°

Audy-Solitaire RF D+B

RF= fixed vertical rod 988mm (possibility to shorten with tube cutter)
230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
material: brass
SUSPENSION - IP40


	DIM		COVER brass / FRAME brass	COVER black / FRAME black	COVER white / FRAME white	COVER gunmetal / FRAME gunmetal	COVER bronze / FRAME bronze	COVER nickel / FRAME nickel
	LC	**2700K**	AUSBD 1213◆					
	LC	**2700K**		AUSBD 1212◆	AUSBD 1211◆			
	LC	**2700K**				AUSBD 1214◆	AUSBD 1217◆	AUSBD 1219◆
	LC	**3000K**	AUSBD 1313◆					
	LC	**3000K**		AUSBD 1312◆	AUSBD 1311◆			
	LC	**3000K**				AUSBD 1314◆	AUSBD 1317◆	AUSBD 1319◆
+ honeycomb	LC	**2700K**	AUSBD 1213H◆					
+ honeycomb	LC	**2700K**		AUSBD 1212H◆	AUSBD 1211H◆			
+ honeycomb	LC	**2700K**				AUSBD 1214H◆	AUSBD 1217H◆	AUSBD 1219H◆
+ honeycomb	LC	**3000K**	AUSBD 1313H◆					
+ honeycomb	LC	**3000K**		AUSBD 1312H◆	AUSBD 1311H◆			
+ honeycomb	LC	**3000K**				AUSBD 1314H◆	AUSBD 1317H◆	AUSBD 1319H◆



Choose beam:
M=medium 23° or
W=wide 40°

Audy-Solitaire RL

RL= long vertical rod 750mm + powercord - Longer lengths available **on demand**
350mA - **required driver see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
material: brass
SUSPENSION - IP40


POWERCORD LENGTH		COVER brass / POWERCORD black / FRAME brass	COVER black / POWERCORD black / FRAME black	COVER white / POWERCORD white / FRAME white	COVER gunmetal / POWERCORD black / FRAME gunmetal	COVER bronze / POWERCORD black / FRAME bronze	COVER nickel / POWERCORD black / FRAME nickel
FALSE ceiling							
 50							
L 1000	2700K	AUCA 1232◆					
L 1000	2700K		AUCA 1222◆	AUCA 1211◆			
L 1000	2700K				AUCA 1242◆	AUCA 1272◆	AUCA 1292◆
L 1000	3000K	AUCA 1332◆					
L 1000	3000K		AUCA 1322◆	AUCA 1311◆			
L 1000	3000K				AUCA 1342◆	AUCA 1372◆	AUCA 1392◆
+ honeycomb	L 1000	2700K	AUCA 1232H◆				
+ honeycomb	L 1000	2700K		AUCA 1222H◆	AUCA 1211H◆		
+ honeycomb	L 1000	2700K				AUCA 1242H◆	AUCA 1272H◆	AUCA 1292H◆
+ honeycomb	L 1000	3000K	AUCA 1332H◆				
+ honeycomb	L 1000	3000K		AUCA 1322H◆	AUCA 1311H◆		
+ honeycomb	L 1000	3000K				AUCA 1342H◆	AUCA 1372H◆	AUCA 1392H◆
CONCRETE ceiling							
 40							
L 1000	2700K	AUCC 1232◆					
L 1000	2700K		AUCC 1222◆	AUCC 1211◆			
L 1000	2700K				AUCC 1242◆	AUCC 1272◆	AUCC 1292◆
L 1000	3000K	AUCC 1332◆					
L 1000	3000K		AUCC 1322◆	AUCC 1311◆			
L 1000	3000K				AUCC 1342◆	AUCC 1372◆	AUCC 1392◆
+ honeycomb	L 1000	2700K	AUCC 1232H◆				
+ honeycomb	L 1000	2700K		AUCC 1222H◆	AUCC 1211H◆		
+ honeycomb	L 1000	2700K				AUCC 1242H◆	AUCC 1272H◆	AUCC 1292H◆
+ honeycomb	L 1000	3000K	AUCC 1332H◆				
+ honeycomb	L 1000	3000K		AUCC 1322H◆	AUCC 1311H◆		
+ honeycomb	L 1000	3000K				AUCC 1342H◆	AUCC 1372H◆	AUCC 1392H◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audy-Solitaire RL D+B


RL= long vertical rod 750 mm + powercord - Longer lengths available **on demand**
230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
material: brass
SUSPENSION - IP40

	POWERCORD LENGTH	DIM		COVER brass / POWERCORD black / FRAME brass	COVER black / POWERCORD black / FRAME black	COVER white / POWERCORD white / FRAME white	COVER gunmetal / POWERCORD black / FRAME gunmetal	COVER bronze / POWERCORD black / FRAME bronze	COVER nickel / POWERCORD black / FRAME nickel
	L 1000	LC	2700K	AUCBD 1213◆					
	L 1000	LC	2700K		AUCBD 1212◆	AUCBD 1211◆			
	L 1000	LC	2700K				AUCBD 1214◆	AUCBD 1217◆	AUCBD 1219◆
	L 1000	LC	3000K	AUCBD 1313◆					
	L 1000	LC	3000K		AUCBD 1312◆	AUCBD 1311◆			
	L 1000	LC	3000K				AUCBD 1314◆	AUCBD 1317◆	AUCBD 1319◆
+ honeycomb	L 1000	LC	2700K	AUCBD 1213H◆					
+ honeycomb	L 1000	LC	2700K		AUCBD 1212H◆	AUCBD 1211H◆			
+ honeycomb	L 1000	LC	2700K				AUCBD 1214H◆	AUCBD 1217H◆	AUCBD 1219H◆
+ honeycomb	L 1000	LC	3000K	AUCBD 1313H◆					
+ honeycomb	L 1000	LC	3000K		AUCBD 1312H◆	AUCBD 1311H◆			
+ honeycomb	L 1000	LC	3000K				AUCBD 1314H◆	AUCBD 1317H◆	AUCBD 1319H◆


DESIGN YOUR OWN AUSTERE-CHANDELIER - REMOTE MOUNTING

I. Choose the shape of the chandelier: Y or X

chandelier: **Y**

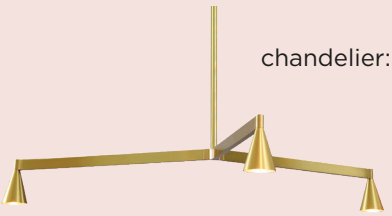

chandelier: **X**

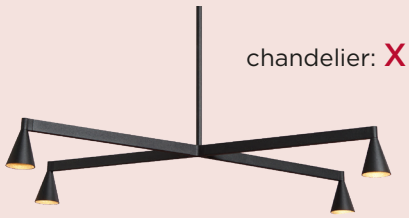

II. Choose the levels of the chandelier: 1 level, 2 levels or 3 levels



III. Choose the arm length per level: 250mm, 500mm or 750mm (Each arm on the same level has the same length)

arm **250mm**




Y chandelier: 3 x 250mm = **Ø590mm**
X chandelier: 4 x 250mm = **L 516mm W 316mm**

arm **500mm**



Y chandelier: 3 x 500mm = **Ø1090mm**
X chandelier: 4 x 500mm = **L 949mm W 565mm**


arm **750mm**



Y chandelier: 3 x 750mm = **Ø1590mm**
X chandelier: 4 x 750mm = **L 1382mm W 815mm**

IV. Choose the colors and the vertical ROD: RS 16, RL 79, RF 75 or RF 100

rod short: RS 16





rod long: RL 79





rod fixed: RF 75






*Total height depends on the chosen mounting option; see **NOTE** on product page.

Shorter vertical rod available **on demand** at additional cost.

rod fixed: RF 100





*Total height depends on the chosen mounting option; see **NOTE** on product page.

Shorter vertical rod available **on demand** at additional cost.


V. Choose your cover or canopy for 'REMOTE MOUNTING' driver:



cover C6

false/concrete* ceiling

aperture: Ø45




False ceiling: **RS 16**, **RL 79**, **RF 75** & **RF 100**
Concrete ceiling: **RS 16** & **RL 79**
* **DRIVER remote**



cover C8

concrete ceiling

aperture: Ø30 & depth: min. 50




For **RF 75** & **RF 100**
DRIVER remote



canopy B10

false/concrete ceiling




For **RS 16**, **RL 79**, **RF 75** & **RF 100**
DRIVER remote



canopy B11

false/concrete ceiling




For **RS 16** & **RL 79**
DRIVER remote

on demand



canopy B5

false/concrete ceiling



For **RS 16**, **RL 79**, **RF 75** & **RF 100**
DRIVER remote

on demand



cover 4,5 inch

false/concrete* ceiling

aperture: Ø70



False ceiling: **RS 16**, **RL 79**, **RF 75** & **RF 100**
Concrete ceiling: **RS 16** & **RL 79**
* **DRIVER remote**


VI. Choose your 'REMOTE MOUNTING' driver:

driver: **TRIAC/IGBT** dimmable (**Only for 1Y, 2Y**)
driver: **1-10V** dimmable
driver: **PUSH-DIM** dimmable
driver: **DALI** dimmable


DESIGN YOUR OWN AUSTERE-CHANDELIER - SURFACE MOUNTING

I. Choose the shape of the chandelier: Y or X


chandelier: **Y**

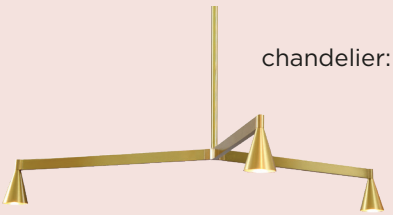

chandelier: **X**

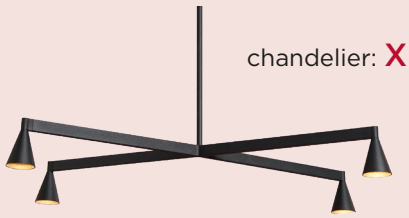

II. Choose the levels of the chandelier: 1 level, 2 levels or 3 levels

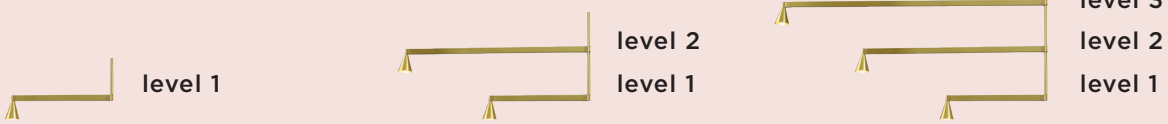

III. Choose the arm length per level: 250mm, 500mm or 750mm (Each arm on the same level has the same length)

arm **250mm**




Y chandelier: 3 x 250mm = **Ø590 mm**
X chandelier: 4 x 250mm = **L 516mm W 316mm**

arm **500mm**



Y chandelier: 3 x 500mm = **Ø1090mm**
X chandelier: 4 x 500mm = **L 949mm W 565mm**


arm **750mm**



Y chandelier: 3 x 750mm = **Ø1590mm**
X chandelier: 4 x 750mm = **L 1382mm W 815mm**


IV. Choose the colors and the vertical ROD: RS 16 or RL 79

rod short: **RS 16**





rod long: **RL 79**






V. Choose your base (driver incl.) for 'SURFACE MOUNTING':




base B20




dimmable driver incl. in base
(1-10V / PUSH-DIM / DALI / TRIAC)
+ casambi possible
Only for 1Y, 2Y, 1X
Max. 6 light-elements




base B21




dimmable driver incl. in base
(1-10V / PUSH-DIM / DALI / TRIAC)
+ casambi possible
Only for 1Y, 2Y, 1X
Max. 6 light-elements




base B32



non-dimmable driver incl. in base



base B50



dimmable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible


REMOTE MOUNTED DRIVER

Austere-Chandelier 1Y RF 75

RF= fixed vertical rod 750mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
3 x LED array 6W **(LED incl.)** - 350mA - 3 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 1Y RF 75 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 75** with cover C6 will be **778mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 75** with cover C8 will be **806mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999

NOTE: the total length of the chandelier: **RF 75** with canopy B10 will be **906mm**


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1Y RF 75

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 25WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 30WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
3x 250mm 3x 250mm	1Y RF7 2023	1Y RF7 2022	1Y RF7 2024	1Y RF7 2027	1Y RF7 2029
3x 500mm 3x 500mm	1Y RF7 5023	1Y RF7 5022	1Y RF7 5024	1Y RF7 5027	1Y RF7 5029
3x 750mm 3x 750mm	1Y RF7 7023	1Y RF7 7022	1Y RF7 7024	1Y RF7 7027	1Y RF7 7029


REMOTE MOUNTED DRIVER

Austere-Chandelier 1Y RF 100

RF= fixed vertical rod 1000mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
3 x LED array 6W **(LED incl.)** - 350mA - 3 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 1Y RF 100 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 100** with cover C6 will be **1028mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 100** with cover C8 will be **1056mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999

NOTE: the total length of the chandelier: **RF 100** with canopy B10 will be **1156mm**


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1Y RF 100

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 25WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 30WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
3x 250mm	1Y RF10 2023	1Y RF10 2022			
3x 250mm			1Y RF10 2024	1Y RF10 2027	1Y RF10 2029
3x 500mm	1Y RF10 5023	1Y RF10 5022			
3x 500mm			1Y RF10 5024	1Y RF10 5027	1Y RF10 5029
3x 750mm	1Y RF10 7023	1Y RF10 7022			
3x 750mm			1Y RF10 7024	1Y RF10 7027	1Y RF10 7029

REMOTE MOUNTED DRIVER

Austere-Chandelier 1Y RS 16

RS= short vertical rod 160mm + powercord & steelcable 2000mm

350mA - **required cover/canopy + required remote mounted driver see below**

3 x LED array 6W **(LED incl.)** - 350mA - 3 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 1Y RS 16 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**


REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1Y RS 16

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 25WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 30WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:

3 x 250mm = Ø590mm

3 x 500mm = Ø1090mm

3 x 750mm = Ø1590mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	1Y RS 2023	1Y RS 2022	1Y RS 2013				
3x 250mm				1Y RS 2024	1Y RS 2027	1Y RS 2029	1Y RS 2019
3x 500mm	1Y RS 5023	1Y RS 5022	1Y RS 5013				
3x 500mm				1Y RS 5024	1Y RS 5027	1Y RS 5029	1Y RS 5019
3x 750mm	1Y RS 7023	1Y RS 7022	1Y RS 7013				
3x 750mm				1Y RS 7024	1Y RS 7027	1Y RS 7029	1Y RS 7019

REMOTE MOUNTED DRIVER


Austere-Chandelier 1Y RL 79

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - **required cover/canopy + required remote mounted driver see below**
3 x LED array 6W **(LED incl.)** - 350mA - 3 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 1Y RL 79 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1Y RL 79

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 25WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 30WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	1Y RL 2023	1Y RL 2022	1Y RL 2013				
3x 250mm				1Y RL 2024	1Y RL 2027	1Y RL 2029	1Y RL 2019
3x 500mm	1Y RL 5023	1Y RL 5022	1Y RL 5013				
3x 500mm				1Y RL 5024	1Y RL 5027	1Y RL 5029	1Y RL 5019
3x 750mm	1Y RL 7023	1Y RL 7022	1Y RL 7013				
3x 750mm				1Y RL 7024	1Y RL 7027	1Y RL 7029	1Y RL 7019

SURFACE MOUNTED DRIVER


Austere-Chandelier 1Y RS 16 D+B

RS= short vertical rod 160mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
3 x LED array 6W **(LED incl.)** - 350mA - 3 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for **Austere-**Chandelier 1Y RS 16 with **SURFACE MOUNTED DRIVER**

base B20

110V-230V - driver included in base
+ casambi possible



1-10 PU DA	white	BCDP 2401
1-10 PU DA	black	BCDP 2402
LC	white	BCT3 2401
LC	black	BCT3 2402

optional: **casambi** | D CAS |

base B21

110V-230V - driver included in base
+ casambi possible




1-10 PU DA	white	BCDP 2411
1-10 PU DA	black	BCDP 2422
LC	white	BCT3 2411
LC	black	BCT3 2422

optional: **casambi** | D CAS |

base B32


230V - driver included in base



NO	white	BNDN 0811
NO	black	BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811
1-10 PU	black	BDPU 0822
DA PU	white	BDDA 0811
DA PU	black	BDDA 0822

optional: **casambi** | D CAS |



Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL	FRAME brass, POWERCORD black, STEELCABLE black	FRAME black, POWERCORD black, STEELCABLE black	FRAME brass, POWERCORD white, STEELCABLE silver	FRAME gunmetal, POWERCORD black, STEELCABLE black	FRAME bronze, POWERCORD black, STEELCABLE black	FRAME nickel, POWERCORD black, STEELCABLE black	FRAME nickel, POWERCORD white, STEELCABLE silver
3x 250mm	1Y RS 2023	1Y RS 2022	1Y RS 2013				
3x 250mm				1Y RS 2024	1Y RS 2027	1Y RS 2029	1Y RS 2019
3x 500mm	1Y RS 5023	1Y RS 5022	1Y RS 5013				
3x 500mm				1Y RS 5024	1Y RS 5027	1Y RS 5029	1Y RS 5019
3x 750mm	1Y RS 7023	1Y RS 7022	1Y RS 7013				
3x 750mm				1Y RS 7024	1Y RS 7027	1Y RS 7029	1Y RS 7019

SURFACE MOUNTED DRIVER


Austere-Chandelier 1Y RL 79 D+B

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
3 x LED array 6W **(LED incl.)** - 350mA - 3 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 1Y RL 79 with SURFACE MOUNTED DRIVER

base B20

110V-230V - driver included in base
+ casambi possible



1-10 PU DA	white	BCDP 2401
1-10 PU DA	black	BCDP 2402
LC	white	BCT3 2401
LC	black	BCT3 2402

optional: **casambi** | D CAS |

base B21

110V-230V - driver included in base
+ casambi possible




1-10 PU DA	white	BCDP 2411
1-10 PU DA	black	BCDP 2422
LC	white	BCT3 2411
LC	black	BCT3 2422

optional: **casambi** | D CAS |

base B32


230V - driver included in base



NO	white	BNDN 0811
NO	black	BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811
1-10 PU	black	BDPU 0822
DA PU	white	BDDA 0811
DA PU	black	BDDA 0822

optional: **casambi** | D CAS |



Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	1Y RL 2023	1Y RL 2022	1Y RL 2013				
3x 250mm				1Y RL 2024	1Y RL 2027	1Y RL 2029	1Y RL 2019
3x 500mm	1Y RL 5023	1Y RL 5022	1Y RL 5013				
3x 500mm				1Y RL 5024	1Y RL 5027	1Y RL 5029	1Y RL 5019
3x 750mm	1Y RL 7023	1Y RL 7022	1Y RL 7013				
3x 750mm				1Y RL 7024	1Y RL 7027	1Y RL 7029	1Y RL 7019


REMOTE MOUNTED DRIVER

Austere-Chandelier 2Y RF 75

RF= fixed vertical rod 750mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 2Y RF 75 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 75** with cover C6 will be **914mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 75** with cover C8 will be **942mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999

NOTE: the total length of the chandelier: **RF 75** with canopy B10 will be **1042mm**


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2Y RF 75

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 40WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

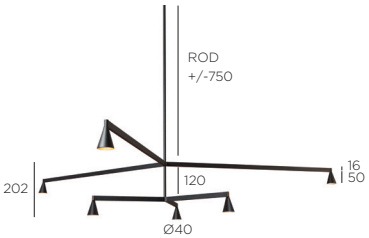

Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
3x 250mm	&	3x 250mm	2Y RF7 2223	2Y RF7 2222			
3x 250mm	&	3x 250mm			2Y RF7 2224	2Y RF7 2227	2Y RF7 2229
3x 250mm	&	3x 500mm	2Y RF7 2523	2Y RF7 2522			
3x 250mm	&	3x 500mm			2Y RF7 2524	2Y RF7 2527	2Y RF7 2529
3x 500mm	&	3x 500mm	2Y RF7 5523	2Y RF7 5522			
3x 500mm	&	3x 500mm			2Y RF7 5524	2Y RF7 5527	2Y RF7 5529
3x 500mm	&	3x 750mm	2Y RF7 5723	2Y RF7 5722			
3x 500mm	&	3x 750mm			2Y RF7 5724	2Y RF7 5727	2Y RF7 5729
3x 750mm	&	3x 750mm	2Y RF7 7723	2Y RF7 7722			
3x 750mm	&	3x 750mm			2Y RF7 7724	2Y RF7 7727	2Y RF7 7729

REMOTE MOUNTED DRIVER

Austere-Chandelier 2Y RF 100

RF= fixed vertical rod 1000mm - Shorter RF ROD available **on demand**

350mA - required cover/canopy + required remote mounted driver **see below**


6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93

material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 2Y RF 100 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 100** with cover C6 will be **1164mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 100** with cover C8 will be **1192mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999

NOTE: the total length of the chandelier: **RF 100** with canopy B10 will be **1292mm**

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**


REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2Y RF 100

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 40WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:

3 x 250mm = Ø590mm

3 x 500mm = Ø1090mm

3 x 750mm = Ø1590mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
3x 250mm	&	3x 250mm	2Y RF10 2223	2Y RF10 2222			
3x 250mm	&	3x 250mm			2Y RF10 2224	2Y RF10 2227	2Y RF10 2229
3x 250mm	&	3x 500mm	2Y RF10 2523	2Y RF10 2522			
3x 250mm	&	3x 500mm			2Y RF10 2524	2Y RF10 2527	2Y RF10 2529
3x 500mm	&	3x 500mm	2Y RF10 5523	2Y RF10 5522			
3x 500mm	&	3x 500mm			2Y RF10 5524	2Y RF10 5527	2Y RF10 5529
3x 500mm	&	3x 750mm	2Y RF10 5723	2Y RF10 5722			
3x 500mm	&	3x 750mm			2Y RF10 5724	2Y RF10 5727	2Y RF10 5729
3x 750mm	&	3x 750mm	2Y RF10 7723	2Y RF10 7722			
3x 750mm	&	3x 750mm			2Y RF10 7724	2Y RF10 7727	2Y RF10 7729

REMOTE MOUNTED DRIVER

Austere-Chandelier 2Y RS 16

RS= short vertical rod 160mm + powercord & steelcable 2000mm

350mA - required cover/canopy + required remote mounted driver **see below**

6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 2Y RS 16 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**


REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2Y RS 16

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 40WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

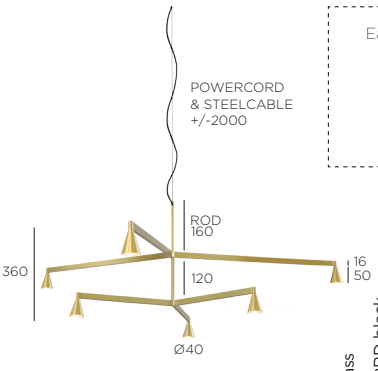

Each arm on the same level has the same length:

3 x 250mm = Ø590mm

3 x 500mm = Ø1090mm

3 x 750mm = Ø1590mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	&	3x 250mm	2Y RS 2223	2Y RS 2222	2Y RS 2213	2Y RS 2224	2Y RS 2227	2Y RS 2229	2Y RS 2219
3x 250mm	&	3x 250mm							
3x 250mm	&	3x 500mm	2Y RS 2523	2Y RS 2522	2Y RS 2513	2Y RS 2524	2Y RS 2527	2Y RS 2529	2Y RS 2519
3x 250mm	&	3x 500mm							
3x 500mm	&	3x 500mm	2Y RS 5523	2Y RS 5522	2Y RS 5513	2Y RS 5524	2Y RS 5527	2Y RS 5529	2Y RS 5519
3x 500mm	&	3x 500mm							
3x 500mm	&	3x 750mm	2Y RS 5723	2Y RS 5722	2Y RS 5713	2Y RS 5724	2Y RS 5727	2Y RS 5729	2Y RS 5719
3x 500mm	&	3x 750mm							
3x 750mm	&	3x 750mm	2Y RS 7723	2Y RS 7722	2Y RS 7713	2Y RS 7724	2Y RS 7727	2Y RS 7729	2Y RS 7719
3x 750mm	&	3x 750mm							

REMOTE MOUNTED DRIVER


Austere-Chandelier 2Y RL 79

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - **required cover/canopy + required remote mounted driver see below**
6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 2Y RL 79 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2Y RL 79

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 40WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 142

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	&	3x 250mm	2Y RL 2223	2Y RL 2222	2Y RL 2213				
3x 250mm	&	3x 250mm				2Y RL 2224	2Y RL 2227	2Y RL 2229	2Y RL 2219
3x 250mm	&	3x 500mm	2Y RL 2523	2Y RL 2522	2Y RL 2513				
3x 250mm	&	3x 500mm				2Y RL 2524	2Y RL 2527	2Y RL 2529	2Y RL 2519
3x 500mm	&	3x 500mm	2Y RL 5523	2Y RL 5522	2Y RL 5513				
3x 500mm	&	3x 500mm				2Y RL 5524	2Y RL 5527	2Y RL 5529	2Y RL 5519
3x 500mm	&	3x 750mm	2Y RL 5723	2Y RL 5722	2Y RL 5713				
3x 500mm	&	3x 750mm				2Y RL 5724	2Y RL 5727	2Y RL 5729	2Y RL 5719
3x 750mm	&	3x 750mm	2Y RL 7723	2Y RL 7722	2Y RL 7713				
3x 750mm	&	3x 750mm				2Y RL 7724	2Y RL 7727	2Y RL 7729	2Y RL 7719

SURFACE MOUNTED DRIVER


Austere-Chandelier 2Y RS 16 D+B

RS= short vertical rod 160mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 2Y RS 16 with SURFACE MOUNTED DRIVER

base B20

110V-230V - driver included in base
+ casambi possible



1-10 PU DA	white	BCDP 2401
1-10 PU DA	black	BCDP 2402
LC	white	BCT6 2401
LC	black	BCT6 2402

optional: **casambi** | D CAS |

base B21

110V-230V - driver included in base
+ casambi possible




1-10 PU DA	white	BCDP 2411
1-10 PU DA	black	BCDP 2422
LC	white	BCT6 2411
LC	black	BCT6 2422

optional: **casambi** | D CAS |

base B32


230V - driver included in base



NO	white	BNDN 0811
NO	black	BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811
1-10 PU	black	BDPU 0822
DA PU	white	BDDA 0811
DA PU	black	BDDA 0822

optional: **casambi** | D CAS |

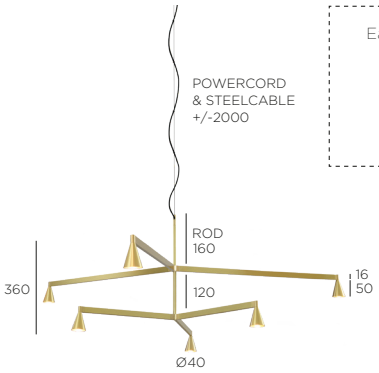

Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	&	3x 250mm	2Y RS 2223	2Y RS 2222	2Y RS 2213	2Y RS 2224	2Y RS 2227	2Y RS 2229	2Y RS 2219
3x 250mm	&	3x 250mm							
3x 250mm	&	3x 500mm	2Y RS 2523	2Y RS 2522	2Y RS 2513	2Y RS 2524	2Y RS 2527	2Y RS 2529	2Y RS 2519
3x 250mm	&	3x 500mm							
3x 500mm	&	3x 500mm	2Y RS 5523	2Y RS 5522	2Y RS 5513	2Y RS 5524	2Y RS 5527	2Y RS 5529	2Y RS 5519
3x 500mm	&	3x 500mm							
3x 500mm	&	3x 750mm	2Y RS 5723	2Y RS 5722	2Y RS 5713	2Y RS 5724	2Y RS 5727	2Y RS 5729	2Y RS 5719
3x 500mm	&	3x 750mm							
3x 750mm	&	3x 750mm	2Y RS 7723	2Y RS 7722	2Y RS 7713	2Y RS 7724	2Y RS 7727	2Y RS 7729	2Y RS 7719
3x 750mm	&	3x 750mm							

SURFACE MOUNTED DRIVER


Austere-Chandelier 2Y RL 79 D+B

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 2Y RL 79 with SURFACE MOUNTED DRIVER

base B20

110V-230V - driver included in base
+ casambi possible



1-10 PU DA	white	BCDP 2401
1-10 PU DA	black	BCDP 2402
LC	white	BCT6 2401
LC	black	BCT6 2402

optional: **casambi** | D CAS |

base B21

110V-230V - driver included in base
+ casambi possible




1-10 PU DA	white	BCDP 2411
1-10 PU DA	black	BCDP 2422
LC	white	BCT6 2411
LC	black	BCT6 2422

optional: **casambi** | D CAS |

base B32


230V - driver included in base



NO	white	BNDN 0811
NO	black	BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811
1-10 PU	black	BDPU 0822
DA PU	white	BDDA 0811
DA PU	black	BDDA 0822

optional: **casambi** | D CAS |



Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	&	3x 250mm	2Y RL 2223	2Y RL 2222	2Y RL 2213				
3x 250mm	&	3x 250mm				2Y RL 2224	2Y RL 2227	2Y RL 2229	2Y RL 2219
3x 250mm	&	3x 500mm	2Y RL 2523	2Y RL 2522	2Y RL 2513				
3x 250mm	&	3x 500mm				2Y RL 2524	2Y RL 2527	2Y RL 2529	2Y RL 2519
3x 500mm	&	3x 500mm	2Y RL 5523	2Y RL 5522	2Y RL 5513				
3x 500mm	&	3x 500mm				2Y RL 5524	2Y RL 5527	2Y RL 5529	2Y RL 5519
3x 500mm	&	3x 750mm	2Y RL 5723	2Y RL 5722	2Y RL 5713				
3x 500mm	&	3x 750mm				2Y RL 5724	2Y RL 5727	2Y RL 5729	2Y RL 5719
3x 750mm	&	3x 750mm	2Y RL 7723	2Y RL 7722	2Y RL 7713				
3x 750mm	&	3x 750mm				2Y RL 7724	2Y RL 7727	2Y RL 7729	2Y RL 7719


REMOTE MOUNTED DRIVER

Austere-Chandelier 3Y RF 75

RF= fixed vertical rod 750mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
9 x LED array 6W **(LED incl.)** - 350mA - 9 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 3Y RF 75 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 75** with cover C6 will be **1050mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 75** with cover C8 will be **1078mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999

NOTE: the total length of the chandelier: **RF 75** with canopy B10 will be **1178mm**


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3Y RF 75

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

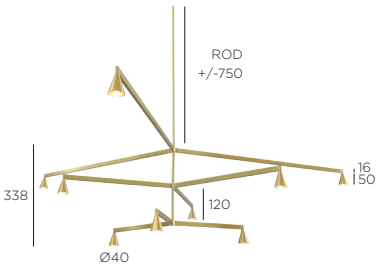

Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL		LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
3x 250mm	&	3x 250mm	&	3x 500mm	3Y RF7 22523	3Y RF7 22522			
3x 250mm	&	3x 250mm	&	3x 500mm			3Y RF7 22524	3Y RF7 22527	3Y RF7 22529
3x 250mm	&	3x 500mm	&	3x 500mm	3Y RF7 25523	3Y RF7 25522			
3x 250mm	&	3x 500mm	&	3x 500mm			3Y RF7 25524	3Y RF7 25527	3Y RF7 25529
3x 250mm	&	3x 500mm	&	3x 750mm	3Y RF7 25723	3Y RF7 25722			
3x 250mm	&	3x 500mm	&	3x 750mm			3Y RF7 25724	3Y RF7 25727	3Y RF7 25729
3x 500mm	&	3x 500mm	&	3x 750mm	3Y RF7 55723	3Y RF7 55722			
3x 500mm	&	3x 500mm	&	3x 750mm			3Y RF7 55724	3Y RF7 55727	3Y RF7 55729
3x 500mm	&	3x 750mm	&	3x 750mm	3Y RF7 57723	3Y RF7 57722			
3x 500mm	&	3x 750mm	&	3x 750mm			3Y RF7 57724	3Y RF7 57727	3Y RF7 57729


REMOTE MOUNTED DRIVER

Austere-Chandelier 3Y RF 100

RF= fixed vertical rod 1000mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
9 x LED array 6W **(LED incl.)** - 350mA - 9 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 3Y RF 100 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 100** with cover C6 will be **1300mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 100** with cover C8 will be **1328mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999


NOTE: the total length of the chandelier: **RF 100** with canopy B10 will be **1428mm**

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3Y RF 100

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

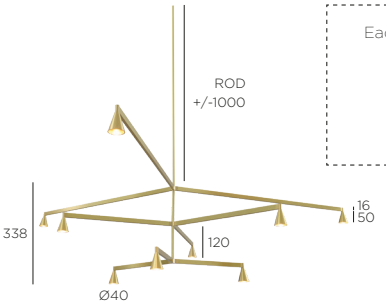

Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	LENGTH / LEVEL	LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
3x 250mm &	3x 250mm &	3x 500mm	3Y RF10 22523	3Y RF10 22522			
3x 250mm &	3x 250mm &	3x 500mm			3Y RF10 22524	3Y RF10 22527	3Y RF10 22529
3x 250mm &	3x 500mm &	3x 500mm	3Y RF10 25523	3Y RF10 25522			
3x 250mm &	3x 500mm &	3x 500mm			3Y RF10 25524	3Y RF10 25527	3Y RF10 25529
3x 250mm &	3x 500mm &	3x 750mm	3Y RF10 25723	3Y RF10 25722			
3x 250mm &	3x 500mm &	3x 750mm			3Y RF10 25724	3Y RF10 25727	3Y RF10 25729
3x 500mm &	3x 500mm &	3x 750mm	3Y RF10 55723	3Y RF10 55722			
3x 500mm &	3x 500mm &	3x 750mm			3Y RF10 55724	3Y RF10 55727	3Y RF10 55729
3x 500mm &	3x 750mm &	3x 750mm	3Y RF10 57723	3Y RF10 57722			
3x 500mm &	3x 750mm &	3x 750mm			3Y RF10 57724	3Y RF10 57727	3Y RF10 57729

REMOTE MOUNTED DRIVER

Austere-Chandelier 3Y RS 16

RS= short vertical rod 160mm + powercord & steelcable 2000mm

350mA - required cover/canopy + required remote mounted driver **see below**

9 x LED array 6W **(LED incl.)** - 350mA - 9 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 3Y RS 16 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: **Ø45** & depth: min. **40mm**



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: **Ø45** & depth: min. **40mm**




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3Y RS 16

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:

3 x 250mm = Ø590mm

3 x 500mm = Ø1090mm

3 x 750mm = Ø1590mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	LENGTH / LEVEL	LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	& 3x 250mm	& 3x 500mm	3Y RS 22523	3Y RS 22522	3Y RS 22513				
3x 250mm	& 3x 250mm	& 3x 500mm				3Y RS 22524	3Y RS 22527	3Y RS 22529	3Y RS 22519
3x 250mm	& 3x 500mm	& 3x 500mm	3Y RS 25523	3Y RS 25522	3Y RS 25513				
3x 250mm	& 3x 500mm	& 3x 500mm				3Y RS 25524	3Y RS 25527	3Y RS 25529	3Y RS 25519
3x 250mm	& 3x 500mm	& 3x 750mm	3Y RS 25723	3Y RS 25722	3Y RS 25713				
3x 250mm	& 3x 500mm	& 3x 750mm				3Y RS 25724	3Y RS 25727	3Y RS 25729	3Y RS 25719
3x 500mm	& 3x 500mm	& 3x 750mm	3Y RS 55723	3Y RS 55722	3Y RS 55713				
3x 500mm	& 3x 500mm	& 3x 750mm				3Y RS 55724	3Y RS 55727	3Y RS 55729	3Y RS 55719
3x 500mm	& 3x 750mm	& 3x 750mm	3Y RS 57723	3Y RS 57722	3Y RS 57713				
3x 500mm	& 3x 750mm	& 3x 750mm				3Y RS 57724	3Y RS 57727	3Y RS 57729	3Y RS 57719

REMOTE MOUNTED DRIVER

Austere-Chandelier 3Y RL 79

RL= long vertical rod 790mm + powercord & steelcable 2000mm

350mA - required cover/canopy + required remote mounted driver **see below**

9 x LED array 6W **(LED incl.)** - 350mA - 9 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 3Y RL 79 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3Y RL 79

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:

3 x 250mm = Ø590mm

3 x 500mm = Ø1090mm

3 x 750mm = Ø1590mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	LENGTH / LEVEL	LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	& 3x 250mm	& 3x 500mm	3Y RL 22523	3Y RL 22522	3Y RL 22513				
3x 250mm	& 3x 250mm	& 3x 500mm				3Y RL 22524	3Y RL 22527	3Y RL 22529	3Y RL 22519
3x 250mm	& 3x 500mm	& 3x 500mm	3Y RL 25523	3Y RL 25522	3Y RL 25513				
3x 250mm	& 3x 500mm	& 3x 500mm				3Y RL 25524	3Y RL 25527	3Y RL 25529	3Y RL 25519
3x 250mm	& 3x 500mm	& 3x 750mm	3Y RL 25723	3Y RL 25722	3Y RL 25713				
3x 250mm	& 3x 500mm	& 3x 750mm				3Y RL 25724	3Y RL 25727	3Y RL 25729	3Y RL 25719
3x 500mm	& 3x 500mm	& 3x 750mm	3Y RL 55723	3Y RL 55722	3Y RL 55713				
3x 500mm	& 3x 500mm	& 3x 750mm				3Y RL 55724	3Y RL 55727	3Y RL 55729	3Y RL 55719
3x 500mm	& 3x 750mm	& 3x 750mm	3Y RL 57723	3Y RL 57722	3Y RL 57713				
3x 500mm	& 3x 750mm	& 3x 750mm				3Y RL 57724	3Y RL 57727	3Y RL 57729	3Y RL 57719

SURFACE MOUNTED DRIVER


Austere-Chandelier 3Y RS 16 D+B

RS= short vertical rod 160mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
9 x LED array 6W **(LED incl.)** - 350mA - 9 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for **Austere**-Chandelier 3Y RS 16 with **SURFACE MOUNTED DRIVER**

base B32


230V - driver included in base



NO	white	BNDN 0811	€480
NO	black	BNDN 0822	€480


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811	
1-10 PU	black	BDPU 0822	
DA PU	white	BDDA 0811	
DA PU	black	BDDA 0822	

optional: **casambi** | D CAS |



Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL	LENGTH / LEVEL	LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	& 3x 250mm	& 3x 500mm	3Y RS 22523	3Y RS 22522	3Y RS 22513				
3x 250mm	& 3x 250mm	& 3x 500mm				3Y RS 22524	3Y RS 22527	3Y RS 22529	3Y RS 22519
3x 250mm	& 3x 500mm	& 3x 500mm	3Y RS 25523	3Y RS 25522	3Y RS 25513				
3x 250mm	& 3x 500mm	& 3x 500mm				3Y RS 25524	3Y RS 25527	3Y RS 25529	3Y RS 25519
3x 250mm	& 3x 500mm	& 3x 750mm	3Y RS 25723	3Y RS 25722	3Y RS 25713				
3x 250mm	& 3x 500mm	& 3x 750mm				3Y RS 25724	3Y RS 25727	3Y RS 25729	3Y RS 25719
3x 500mm	& 3x 500mm	& 3x 750mm	3Y RS 55723	3Y RS 55722	3Y RS 55713				
3x 500mm	& 3x 500mm	& 3x 750mm				3Y RS 55724	3Y RS 55727	3Y RS 55729	3Y RS 55719
3x 500mm	& 3x 750mm	& 3x 750mm	3Y RS 57723	3Y RS 57722	3Y RS 57713				
3x 500mm	& 3x 750mm	& 3x 750mm				3Y RS 57724	3Y RS 57727	3Y RS 57729	3Y RS 57719

SURFACE MOUNTED DRIVER


Austere-Chandelier 3Y RL 79 D+B

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
9 x LED array 6W **(LED incl.)** - 350mA - 9 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for **Austere**-Chandelier 3Y RL 79 with **SURFACE MOUNTED DRIVER**

base B32


230V - driver included in base



NO	white	BNDN 0811	€480
NO	black	BNDN 0822	€480


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811	
1-10 PU	black	BDPU 0822	
DA PU	white	BDDA 0811	
DA PU	black	BDDA 0822	

optional: **casambi** | D CAS |



Each arm on the same level has the same length:
3 x 250mm = Ø590mm
3 x 500mm = Ø1090mm
3 x 750mm = Ø1590mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL	LENGTH / LEVEL	LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
3x 250mm	& 3x 250mm	& 3x 500mm	3Y RL 22523	3Y RL 22522	3Y RL 22513				
3x 250mm	& 3x 250mm	& 3x 500mm				3Y RL 22524	3Y RL 22527	3Y RL 22529	3Y RL 22519
3x 250mm	& 3x 500mm	& 3x 500mm	3Y RL 25523	3Y RL 25522	3Y RL 25513				
3x 250mm	& 3x 500mm	& 3x 500mm				3Y RL 25524	3Y RL 25527	3Y RL 25529	3Y RL 25519
3x 250mm	& 3x 500mm	& 3x 750mm	3Y RL 25723	3Y RL 25722	3Y RL 25713				
3x 250mm	& 3x 500mm	& 3x 750mm				3Y RL 25724	3Y RL 25727	3Y RL 25729	3Y RL 25719
3x 500mm	& 3x 500mm	& 3x 750mm	3Y RL 55723	3Y RL 55722	3Y RL 55713				
3x 500mm	& 3x 500mm	& 3x 750mm				3Y RL 55724	3Y RL 55727	3Y RL 55729	3Y RL 55719
3x 500mm	& 3x 750mm	& 3x 750mm	3Y RL 57723	3Y RL 57722	3Y RL 57713				
3x 500mm	& 3x 750mm	& 3x 750mm				3Y RL 57724	3Y RL 57727	3Y RL 57729	3Y RL 57719


REMOTE MOUNTED DRIVER

Austere-Chandelier 1X RF 75

RF= fixed vertical rod 750mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
4 x LED array 6W **(LED incl.)** - 350mA - 4 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 1X RF 75 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 75** with cover C6 will be **778mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 75** with cover C8 will be **806mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999

NOTE: the total length of the chandelier: **RF 75** with canopy B10 will be **906mm**


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1X RF 75

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 30WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

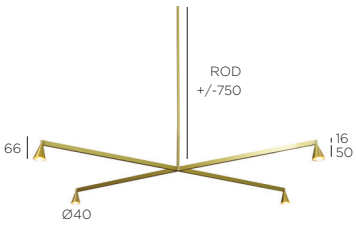

Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
4x 250mm 4x 250mm	1X RF7 2023	1X RF7 2022	1X RF7 2024	1X RF7 2027	1X RF7 2029
4x 500mm 4x 500mm	1X RF7 5023	1X RF7 5022	1X RF7 5024	1X RF7 5027	1X RF7 5029
4x 750mm 4x 750mm	1X RF7 7023	1X RF7 7022	1X RF7 7024	1X RF7 7027	1X RF7 7029

REMOTE MOUNTED DRIVER

Austere-Chandelier 1X RF 100

RF= fixed vertical rod 1000mm - Shorter RF ROD available **on demand**

350mA - required cover/canopy + required remote mounted driver **see below**


4 x LED array 6W **(LED incl.)** - 350mA - 4 x 634lm - 2700K - CRI >93

material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 1X RF 100 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 100** with cover C6 will be **1028mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 100** with cover C8 will be **1056mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999

NOTE: the total length of the chandelier: **RF 100** with canopy B10 will be **1156mm**

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**


REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1X RF 100

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 30WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

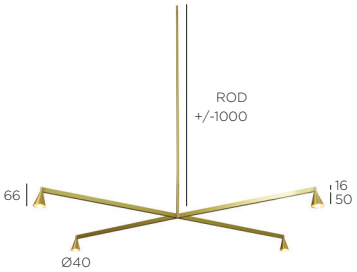

Each arm on the same level has the same length:

4 x 250mm = L 516mm W 316mm

4 x 500mm = L 949mm W 565mm

4 x 750mm = L 1382mm W 815mm

possibilities & dimensions SEE P. 142

LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
4x 250mm 4x 250mm	1X RF10 2023	1X RF10 2022	1X RF10 2024	1X RF10 2027	1X RF10 2029
4x 500mm 4x 500mm	1X RF10 5023	1X RF10 5022	1X RF10 5024	1X RF10 5027	1X RF10 5029
4x 750mm 4x 750mm	1X RF10 7023	1X RF10 7022	1X RF10 7024	1X RF10 7027	1X RF10 7029

REMOTE MOUNTED DRIVER

Austere-Chandelier 1X RS 16

RS= short vertical rod 160mm + powercord & steelcable 2000mm

350mA - **required cover/canopy + required remote mounted driver see below**

4 x LED array 6W **(LED incl.)** - 350mA - 4 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 1X RS 16 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**


REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1X RS 16

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 30WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:

4 x 250mm = L 516mm W 316mm

4 x 500mm = L 949mm W 565mm

4 x 750mm = L 1382mm W 815mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	1X RS 2023	1X RS 2022	1X RS 2013				
4x 250mm				1X RS 2024	1X RS 2027	1X RS 2029	1X RS 2019
4x 500mm	1X RS 5023	1X RS 5022	1X RS 5013				
4x 500mm				1X RS 5024	1X RS 5027	1X RS 5029	1X RS 5019
4x 750mm	1X RS 7023	1X RS 7022	1X RS 7013				
4x 750mm				1X RS 7024	1X RS 7027	1X RS 7029	1X RS 7019

REMOTE MOUNTED DRIVER

Austere-Chandelier 1X RL 79

RL= long vertical rod 790mm + powercord & steelcable 2000mm

350mA - **required cover/canopy + required remote mounted driver see below**

4 x LED array 6W **(LED incl.)** - 350mA - 4 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 1X RL 79 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**


REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1X RL 79

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 30WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

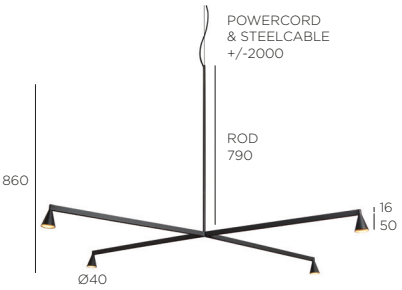

Each arm on the same level has the same length:

4 x 250mm = L 516mm W 316mm

4 x 500mm = L 949mm W 565mm

4 x 750mm = L 1382mm W 815mm

possibilities & dimensions SEE P. 142

LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	1X RL 2023	1X RL 2022	1X RL 2013				
4x 250mm				1X RL 2024	1X RL 2027	1X RL 2029	1X RL 2019
4x 500mm	1X RL 5023	1X RL 5022	1X RL 5013				
4x 500mm				1X RL 5024	1X RL 5027	1X RL 5029	1X RL 5019
4x 750mm	1X RL 7023	1X RL 7022	1X RL 7013				
4x 750mm				1X RL 7024	1X RL 7027	1X RL 7029	1X RL 7019

SURFACE MOUNTED DRIVER


Austere-Chandelier 1X RS 16 D+B

RS= short vertical rod 160mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
4 x LED array 6W **(LED incl.)** - 350mA - 4 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for **Austere**-Chandelier 1X RS 16 with **SURFACE MOUNTED DRIVER**

base B20

110V-230V - driver included in base
+ casambi possible



1-10 PU DA	white	BCDP 2401
1-10 PU DA	black	BCDP 2402

optional: **casambi** | D CAS |

base B21

110V-230V - driver included in base
+ casambi possible




1-10 PU DA	white	BCDP 2411
1-10 PU DA	black	BCDP 2422

optional: **casambi** | D CAS |

base B32


230V - driver included in base



NO	white	BNDN 0811
NO	black	BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811
1-10 PU	black	BDPU 0822
DA PU	white	BDDA 0811
DA PU	black	BDDA 0822

optional: **casambi** | D CAS |



Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	1X RS 2023	1X RS 2022	1X RS 2013				
4x 250mm				1X RS 2024	1X RS 2027	1X RS 2029	1X RS 2019
4x 500mm	1X RS 5023	1X RS 5022	1X RS 5013				
4x 500mm				1X RS 5024	1X RS 5027	1X RS 5029	1X RS 5019
4x 750mm	1X RS 7023	1X RS 7022	1X RS 7013				
4x 750mm				1X RS 7024	1X RS 7027	1X RS 7029	1X RS 7019

SURFACE MOUNTED DRIVER


Austere-Chandelier 1X RL 79 D+B

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
4 x LED array 6W **(LED incl.)** - 350mA - 4 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 1X RL 79 with SURFACE MOUNTED DRIVER

base B20

110V-230V - driver included in base
+ casambi possible



1-10 PU DA	white	BCDP 2401
1-10 PU DA	black	BCDP 2402

optional: **casambi** | D CAS |

base B21

110V-230V - driver included in base
+ casambi possible




1-10 PU DA	white	BCDP 2411
1-10 PU DA	black	BCDP 2422

optional: **casambi** | D CAS |

base B32


230V - driver included in base



NO	white	BNDN 0811
NO	black	BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811
1-10 PU	black	BDPU 0822
DA PU	white	BDDA 0811
DA PU	black	BDDA 0822

optional: **casambi** | D CAS |

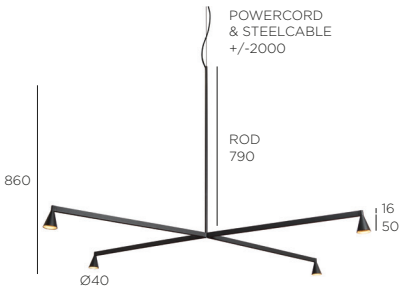

Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm 4x 250mm	1X RL 2023	1X RL 2022	1X RL 2013	1X RL 2024	1X RL 2027	1X RL 2029	1X RL 2019
4x 500mm 4x 500mm	1X RL 5023	1X RL 5022	1X RL 5013	1X RL 5024	1X RL 5027	1X RL 5029	1X RL 5019
4x 750mm 4x 750mm	1X RL 7023	1X RL 7022	1X RL 7013	1X RL 7024	1X RL 7027	1X RL 7029	1X RL 7019


REMOTE MOUNTED DRIVER

Austere-Chandelier 2X RF 75

RF= fixed vertical rod 750mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 2X RF 75 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 75** with cover C6 will be **914mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 75** with cover C8 will be **942mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999


NOTE: the total length of the chandelier: **RF 75** with canopy B10 will be **1042mm**

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2X RF 75

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

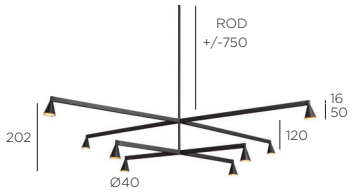

Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
4x 250mm	&	4x 500mm	2X RF7 2523	2X RF7 2522			
4x 250mm	&	4x 500mm			2X RF7 2524	2X RF7 2527	2X RF7 2529
4x 500mm	&	4x 750mm	2X RF7 5723	2X RF7 5722			
4x 500mm	&	4x 750mm			2X RF7 5724	2X RF7 5727	2X RF7 5729

REMOTE MOUNTED DRIVER

Austere-Chandelier 2X RF 100

RF= fixed vertical rod 1000mm - Shorter RF ROD available **on demand**

350mA - **required cover/canopy + required remote mounted driver see below**

8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 2X RF 100 with REMOTE MOUNTED DRIVER

cover C6•

false ceiling




white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 100** with cover C6 will be **1164mm**

cover C8

concrete ceiling




white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 100** with cover C8 will be **1192mm**

canopy B10

false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999

NOTE: the total length of the chandelier: **RF 100** with canopy B10 will be **1292mm**


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2X RF 100

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

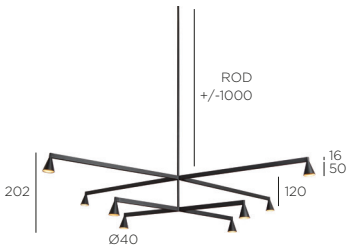

Each arm on the same level has the same length:

4 x 250mm = L 516mm W 316mm

4 x 500mm = L 949mm W 565mm

4 x 750mm = L 1382mm W 815mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
4x 250mm	&	4x 500mm	2X RF10 2523	2X RF10 2522			
4x 250mm	&	4x 500mm			2X RF10 2524	2X RF10 2527	2X RF10 2529
4x 500mm	&	4x 750mm	2X RF10 5723	2X RF10 5722			
4x 500mm	&	4x 750mm			2X RF10 5724	2X RF10 5727	2X RF10 5729

REMOTE MOUNTED DRIVER

Austere-Chandelier 2X RS 16

RS= short vertical rod 160mm + powercord & steelcable 2000mm

350mA - **required cover/canopy + required remote mounted driver see below**

8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 2X RS 16 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2X RS 16

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:

4 x 250mm = L 516mm W 316mm

4 x 500mm = L 949mm W 565mm

4 x 750mm = L 1382mm W 815mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	&	4x 500mm	2X RS 2523	2X RS 2522	2X RS 2513				
4x 250mm	&	4x 500mm				2X RS 2524	2X RS 2527	2X RS 2529	2X RS 2519
4x 500mm	&	4x 750mm	2X RS 5723	2X RS 5722	2X RS 5713				
4x 500mm	&	4x 750mm				2X RS 5724	2X RS 5727	2X RS 5729	2X RS 5719

REMOTE MOUNTED DRIVER

Austere-Chandelier 2X RL 79

RL= long vertical rod 790mm + powercord & steelcable 2000mm

350mA - **required cover/canopy + required remote mounted driver see below**

8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 2X RL 79 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2X RL 79

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Each arm on the same level has the same length:

4 x 250mm = L 516mm W 316mm

4 x 500mm = L 949mm W 565mm

4 x 750mm = L 1382mm W 815mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	&	4x 500mm	2X RL 2523	2X RL 2522	2X RL 2513				
4x 250mm	&	4x 500mm				2X RL 2524	2X RL 2527	2X RL 2529	2X RL 2519
4x 500mm	&	4x 750mm	2X RL 5723	2X RL 5722	2X RL 5713				
4x 500mm	&	4x 750mm				2X RL 5724	2X RL 5727	2X RL 5729	2X RL 5719

SURFACE MOUNTED DRIVER


Austere-Chandelier 2X RS 16 D+B

RS= short vertical rod 160mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for **Austere**-Chandelier 2X RS 16 with **SURFACE MOUNTED DRIVER**

base B32


230V - driver included in base



NO white BNDN 0811
NO black BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU white BDPU 0811
1-10 PU black BDPU 0822
DA PU white BDDA 0811
DA PU black BDDA 0822

optional: **casambi** | D CAS |



Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	&	4x 500mm	2X RS 2523	2X RS 2522	2X RS 2513				
4x 250mm	&	4x 500mm				2X RS 2524	2X RS 2527	2X RS 2529	2X RS 2519
4x 500mm	&	4x 750mm	2X RS 5723	2X RS 5722	2X RS 5713				
4x 500mm	&	4x 750mm				2X RS 5724	2X RS 5727	2X RS 5729	2X RS 5719

SURFACE MOUNTED DRIVER


Austere-Chandelier 2X RL 79 D+B

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 2X RL 79 with SURFACE MOUNTED DRIVER

base B32


230V - driver included in base



NO white BNDN 0811
NO black BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU white BDPU 0811
1-10 PU black BDPU 0822
DA PU white BDDA 0811
DA PU black BDDA 0822

optional: **casambi** | D CAS |



Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL		LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	&	4x 500mm	2X RL 2523	2X RL 2522	2X RL 2513				
4x 250mm	&	4x 500mm				2X RL 2524	2X RL 2527	2X RL 2529	2X RL 2519
4x 500mm	&	4x 750mm	2X RL 5723	2X RL 5722	2X RL 5713				
4x 500mm	&	4x 750mm				2X RL 5724	2X RL 5727	2X RL 5729	2X RL 5719


REMOTE MOUNTED DRIVER

Austere-Chandelier 3X RF 75

RF= fixed vertical rod 750mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
12 x LED array 6W **(LED incl.)** - 350mA - 12 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 3X RF 75 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 75** with cover C6 will be **1050mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 75** with cover C8 will be **1078mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999


NOTE: the total length of the chandelier: **RF 75** with canopy B10 will be **1178mm**

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3X RF 75

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 150WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

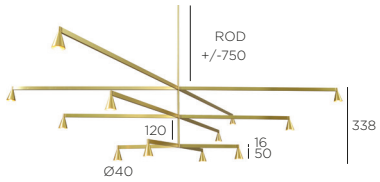

Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	LENGTH / LEVEL	LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
4x 250mm &	4x 500mm &	4x 750mm	3X RF7 25723	3X RF7 25722	3X RF7 25724	3X RF7 25727	3X RF7 25729
4x 250mm &	4x 500mm &	4x 750mm					


REMOTE MOUNTED DRIVER

Austere-Chandelier 3X RF 100

RF= fixed vertical rod 1000mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
12 x LED array 6W **(LED incl.)** - 350mA - 12 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 3X RF 100 with REMOTE MOUNTED DRIVER


cover C6•
false ceiling



white	21CO 1100
black	21CO 2200
brass	21CO 3300
gunmetal	21CO 4400
bronze	21CO 7700
nickel	21CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier: **RF 100** with cover C6 will be **1300mm**


cover C8
concrete ceiling



white	21CO 8001
black	21CO 8002
brass	21CO 8003
gunmetal	21CO 8004
bronze	21CO 8007
nickel	21CO 8009

NOTE: the total length of the chandelier: **RF 100** with cover C8 will be **1328mm**

canopy B10
false/concrete ceiling



white	21CP 1111
black	21CP 2222
brass	21CP 3333
gunmetal	21CP 4444
bronze	21CP 7777
nickel	21CP 9999


NOTE: the total length of the chandelier: **RF 100** with canopy B10 will be **1428mm**

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3X RF 100

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 150WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

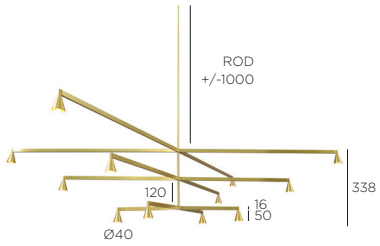

Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	LENGTH / LEVEL	LENGTH / LEVEL	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
4x 250mm &	4x 500mm &	4x 750mm	3X RF10 25723	3X RF10 25722			
4x 250mm &	4x 500mm &	4x 750mm			3X RF10 25724	3X RF10 25727	3X RF10 25729

REMOTE MOUNTED DRIVER

Austere-Chandelier 3X RS 16

RS= short vertical rod 160mm + powercord & steelcable 2000mm

350mA - required cover/canopy + required remote mounted driver **see below**

12 x LED array 6W **(LED incl.)** - 350mA - 12 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 3X RS 16 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: **Ø45** & depth: min. **40mm**



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: **Ø45** & depth: min. **40mm**




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3X RS 16

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 150WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

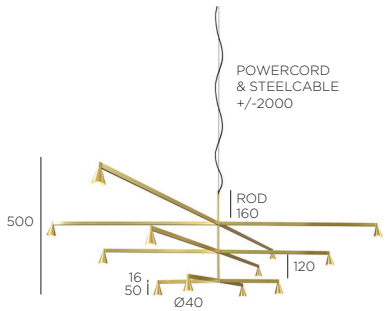

Each arm on the same level has the same length:

4 x 250mm = L 516mm W 316mm

4 x 500mm = L 949mm W 565mm

4 x 750mm = L 1382mm W 815mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	LENGTH / LEVEL	LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	& 4x 500mm	& 4x 750mm	3X RS 25723	3X RS 25722	3X RS 25713				
4x 250mm	& 4x 500mm	& 4x 750mm				3X RS 25724	3X RS 25727	3X RS 25729	3X RS 25719

REMOTE MOUNTED DRIVER

Austere-Chandelier 3X RL 79

RL= long vertical rod 790mm + powercord & steelcable 2000mm

350mA - **required cover/canopy + required remote mounted driver see below**

12 x LED array 6W **(LED incl.)** - 350mA - 12 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Chandelier 3X RL 79 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: **Ø45** & depth: min. **40mm**



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: **Ø45** & depth: min. **40mm**




white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

canopy B11
false/concrete ceiling



white	21CP 1011
black	21CP 2022
brass	21CP 3033
gunmetal	21CP 4044
bronze	21CP 7077
nickel	21CP 9099


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3X RL 79

DEVICE	DIM.	DRIVER	VOLT
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 150WD24V•	230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

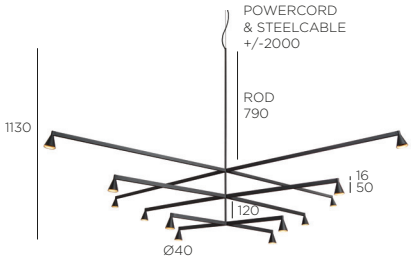

Each arm on the same level has the same length:

4 x 250mm = L 516mm W 316mm

4 x 500mm = L 949mm W 565mm

4 x 750mm = L 1382mm W 815mm

possibilities & dimensions SEE P. 142

+

LENGTH / LEVEL	FRAME brass · POWERCORD black · STEELCABLE black	FRAME black · POWERCORD black · STEELCABLE black	FRAME brass · POWERCORD white · STEELCABLE silver	FRAME gunmetal · POWERCORD black · STEELCABLE black	FRAME bronze · POWERCORD black · STEELCABLE black	FRAME nickel · POWERCORD black · STEELCABLE black	FRAME nickel · POWERCORD white · STEELCABLE silver
4x 250mm & 4x 500mm & 4x 750mm	3X RL 25723	3X RL 25722	3X RL 25713				
4x 250mm & 4x 500mm & 4x 750mm				3X RL 25724	3X RL 25727	3X RL 25729	3X RL 25719

SURFACE MOUNTED DRIVER


Austere-Chandelier 3X RS 16 D+B

RS= short vertical rod 160mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
12 x LED array 6W **(LED incl.)** - 350mA - 12 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for **Austere**-Chandelier 3X RS 16 with **SURFACE MOUNTED DRIVER**

base B32


230V - driver included in base



NO white BNDN 0811
NO black BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU white BDPU 0811
1-10 PU black BDPU 0822
DA PU white BDDA 0811
DA PU black BDDA 0822

optional: **casambi** | D CAS |

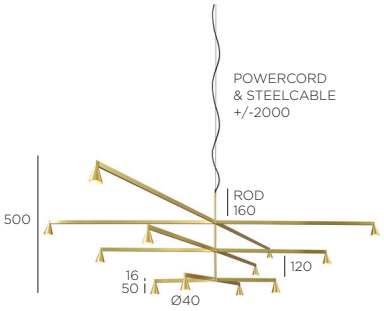

Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL			FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	& 4x 500mm	& 4x 750mm	3X RS 25723	3X RS 25722	3X RS 25713				
4x 250mm	& 4x 500mm	& 4x 750mm				3X RS 25724	3X RS 25727	3X RS 25729	3X RS 25719

SURFACE MOUNTED DRIVER


Austere-Chandelier 3X RL 79 D+B

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
12 x LED array 6W **(LED incl.)** - 350mA - 12 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED BASE (DRIVER INCL.) for **Austere**-Chandelier 3X RS 79 with **SURFACE MOUNTED DRIVER**

base B32


230V - driver included in base



NO	white	BNDN 0811
NO	black	BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811
1-10 PU	black	BDPU 0822
DA PU	white	BDDA 0811
DA PU	black	BDDA 0822


optional: **casambi** | D CAS |

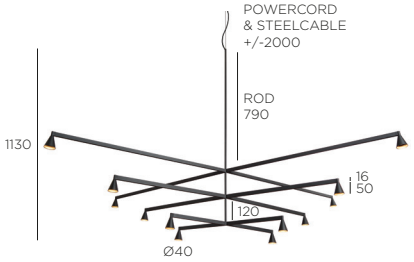

Each arm on the same level has the same length:
4 x 250mm = L 516mm W 316mm
4 x 500mm = L 949mm W 565mm
4 x 750mm = L 1382mm W 815mm
possibilities & dimensions SEE P. 143

+

LENGTH / LEVEL	LENGTH / LEVEL	LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver	FRAME gunmetal POWERCORD black STEELCABLE black	FRAME bronze POWERCORD black STEELCABLE black	FRAME nickel POWERCORD black STEELCABLE black	FRAME nickel POWERCORD white STEELCABLE silver
4x 250mm	& 4x 500mm	& 4x 750mm	3X RL 25723	3X RL 25722	3X RL 25713				
4x 250mm	& 4x 500mm	& 4x 750mm				3X RL 25724	3X RL 25727	3X RL 25729	3X RL 25719




Position of the light fixture
in the base can be adjusted

Austere-D1 3 RF 75

RF= fixed vertical rod 750mm - Shorter RF ROD available **on demand**
230V - **driver in base** - LC **(TRIAC/IGBT) or** 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
3 x LED array 6W **(LED incl.)** - 350mA - 3 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

	DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
black BASE	LC	AFLC 31273	AFLC 31272	AFLC 31271			
white BASE	LC	AFLC 31173	AFLC 31172	AFLC 31171			
black BASE	LC				AFLC 31274	AFLC 31277	AFLC 31279
white BASE	LC				AFLC 31174	AFLC 31177	AFLC 31179
black BASE	1-10 PU	AFPU 31273	AFPU 31272	AFPU 31271			
white BASE	1-10 PU	AFPU 31173	AFPU 31172	AFPU 31171			
black BASE	1-10 PU				AFPU 31274	AFPU 31277	AFPU 31279
white BASE	1-10 PU				AFPU 31174	AFPU 31177	AFPU 31179
black BASE	PU DA	AFDA 31273	AFDA 31272	AFDA 31271			
white BASE	PU DA	AFDA 31173	AFDA 31172	AFDA 31171			
black BASE	PU DA				AFDA 31274	AFDA 31277	AFDA 31279
white BASE	PU DA				AFDA 31174	AFDA 31177	AFDA 31179




Position of the light fixture
in the base can be adjusted

Austere-D1 3 RF 100

RF= fixed vertical rod 1000mm - Shorter RF ROD available **on demand**
230V - **driver in base** - LC **(TRIAC/IGBT) or** 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
3 x LED array 6W **(LED incl.)** - 350mA - 3 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

	DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
black BASE	LC	AFLC 31293	AFLC 31292	AFLC 31291			
white BASE	LC	AFLC 31193	AFLC 31192	AFLC 31191			
black BASE	LC				AFLC 31294	AFLC 31297	AFLC 31299
white BASE	LC				AFLC 31194	AFLC 31197	AFLC 31199
black BASE	1-10 PU	AFPU 31293	AFPU 31292	AFPU 31291			
white BASE	1-10 PU	AFPU 31193	AFPU 31192	AFPU 31191			
black BASE	1-10 PU				AFPU 31294	AFPU 31297	AFPU 31299
white BASE	1-10 PU				AFPU 31194	AFPU 31197	AFPU 31199
black BASE	PU DA	AFDA 31293	AFDA 31292	AFDA 31291			
white BASE	PU DA	AFDA 31193	AFDA 31192	AFDA 31191			
black BASE	PU DA				AFDA 31294	AFDA 31297	AFDA 31299
white BASE	PU DA				AFDA 31194	AFDA 31197	AFDA 31199




Position of the light fixture
in the base can be adjusted

Austere-D2 5 RF 75

RF= fixed vertical rod 750mm - Shorter RF ROD available **on demand**
230V - **driver in base** - LC **(TRIAC/IGBT) or** 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
5 x LED array 6W **(LED incl.)** - 350mA - 5 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

	DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
black BASE	LC	AFLC 52273	AFLC 52272	AFLC 52271			
white BASE	LC	AFLC 52173	AFLC 52172	AFLC 52171			
black BASE	LC				AFLC 52274	AFLC 52277	AFLC 52279
white BASE	LC				AFLC 52174	AFLC 52177	AFLC 52179
black BASE	1-10 PU	AFPU 52273	AFPU 52272	AFPU 52271			
white BASE	1-10 PU	AFPU 52173	AFPU 52172	AFPU 52171			
black BASE	1-10 PU				AFPU 52274	AFPU 52277	AFPU 52279
white BASE	1-10 PU				AFPU 52174	AFPU 52177	AFPU 52179
black BASE	PU DA	AFDA 52273	AFDA 52272	AFDA 52271			
white BASE	PU DA	AFDA 52173	AFDA 52172	AFDA 52171			
black BASE	PU DA				AFDA 52274	AFDA 52277	AFDA 52279
white BASE	PU DA				AFDA 52174	AFDA 52177	AFDA 52179



Position of the light fixture
in the base can be adjusted

Austere-D2 5 RF 100

RF= fixed vertical rod 1000mm - Shorter RF ROD available **on demand**
230V - **driver in base** - LC **(TRIAC/IGBT) or** 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
5 x LED array 6W **(LED incl.)** - 350mA - 5 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

	DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
black BASE	LC	AFLC 52293	AFLC 52292	AFLC 52291			
white BASE	LC	AFLC 52193	AFLC 52192	AFLC 52191			
black BASE	LC				AFLC 52294	AFLC 52297	AFLC 52299
white BASE	LC				AFLC 52194	AFLC 52197	AFLC 52199
black BASE	1-10 PU	AFPU 52293	AFPU 52292	AFPU 52291			
white BASE	1-10 PU	AFPU 52193	AFPU 52192	AFPU 52191			
black BASE	1-10 PU				AFPU 52294	AFPU 52297	AFPU 52299
white BASE	1-10 PU				AFPU 52194	AFPU 52197	AFPU 52199
black BASE	PU DA	AFDA 52293	AFDA 52292	AFDA 52291			
white BASE	PU DA	AFDA 52193	AFDA 52192	AFDA 52191			
black BASE	PU DA				AFDA 52294	AFDA 52297	AFDA 52299
white BASE	PU DA				AFDA 52194	AFDA 52197	AFDA 52199




Position of the light fixture
in the base can be adjusted

Austere-D1 3 RL 79

RL= long vertical rod 750mm + powercord 1000mm - Longer lengths available **on demand**
230V - **driver in base** - LC **(TRIAC/IGBT) or** 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
3 x LED array 6W **(LED incl.)** - 350mA - 3 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

	DIM	POWERCORD LENGTH	FRAME brass / POWERCORD black	FRAME black / POWERCORD black	FRAME white / POWERCORD white	FRAME gunmetal / POWERCORD black	FRAME bronze / POWERCORD black	FRAME nickel / POWERCORD black
black BASE	LC	L 1000	ALLC 31213	ALLC 31212	ALLC 31211			
white BASE	LC	L 1000	ALLC 31113	ALLC 31112	ALLC 31111			
black BASE	LC	L 1000				ALLC 31214	ALLC 31217	ALLC 31219
white BASE	LC	L 1000				ALLC 31114	ALLC 31117	ALLC 31119
black BASE	1-10 PU	L 1000	ALPU 31213	ALPU 31212	ALPU 31211			
white BASE	1-10 PU	L 1000	ALPU 31113	ALPU 31112	ALPU 31111			
black BASE	1-10 PU	L 1000				ALPU 31214	ALPU 31217	ALPU 31219
white BASE	1-10 PU	L 1000				ALPU 31114	ALPU 31117	ALPU 31119
black BASE	PU DA	L 1000	ALDA 31213	ALDA 31212	ALDA 31211			
white BASE	PU DA	L 1000	ALDA 31113	ALDA 31112	ALDA 31111			
black BASE	PU DA	L 1000				ALDA 31214	ALDA 31217	ALDA 31219
white BASE	PU DA	L 1000				ALDA 31114	ALDA 31117	ALDA 31119

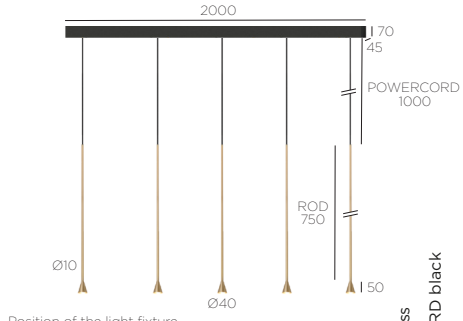


Position of the light fixture
in the base can be adjusted

Austere-D2 5 RL 79


RL= long vertical rod 790mm + powercord 1000mm - Longer lengths available **on demand**
230V - **driver in base** - LC **(TRIAC/IGBT) or** 1-10 **(1-10V) or** PU **(PUSH-DIM) or** DA **(DALI) dimmable**
5 x LED array 6W **(LED incl.)** - 350mA - 5 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

	DIM	POWERCORD LENGTH	FRAME brass / POWERCORD black	FRAME black / POWERCORD black	FRAME white / POWERCORD white	FRAME gunmetal / POWERCORD black	FRAME bronze / POWERCORD black	FRAME nickel / POWERCORD black
black BASE	LC	L 1000	ALLC 52213	ALLC 52212	ALLC 52211			
white BASE	LC	L 1000	ALLC 52113	ALLC 52112	ALLC 52111			
black BASE	LC	L 1000				ALLC 52214	ALLC 52217	ALLC 52219
white BASE	LC	L 1000				ALLC 52114	ALLC 52117	ALLC 52119
black BASE	1-10 PU	L 1000	ALPU 52213	ALPU 52212	ALPU 52211			
white BASE	1-10 PU	L 1000	ALPU 52113	ALPU 52112	ALPU 52111			
black BASE	1-10 PU	L 1000				ALPU 52214	ALPU 52217	ALPU 52219
white BASE	1-10 PU	L 1000				ALPU 52114	ALPU 52117	ALPU 52119
black BASE	PU DA	L 1000	ALDA 52213	ALDA 52212	ALDA 52211			
white BASE	PU DA	L 1000	ALDA 52113	ALDA 52112	ALDA 52111			
black BASE	PU DA	L 1000				ALDA 52214	ALDA 52217	ALDA 52219
white BASE	PU DA	L 1000				ALDA 52114	ALDA 52117	ALDA 52119



Austere-Solitaire RF

RF= fixed vertical rod 988mm (possibility to shorten with tube cutter)
350mA - **required driver see below**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
material: brass
SUSPENSION - IP50


	COVER brass / FRAME brass	COVER black / FRAME black	COVER white / FRAME white	COVER gunmetal / FRAME gunmetal	COVER bronze / FRAME bronze	COVER nickel / FRAME nickel
FALSE ceiling 	HVSU 1003	HVSU 1002	HVSU 1001	HVSU 1004	HVSU 1007	HVSU 1009
CONCRETE ceiling 	HVSC 1003	HVSC 1002	HVSC 1001	HVSC 1004	HVSC 1007	HVSC 1009

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Austere-Solitaire RF D+B

RF= fixed vertical rod 988mm (possibility to shorten with tube cutter)
230V - **driver in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

DIM	FRAME brass / CANOPY brass	FRAME black / CANOPY black	FRAME white / CANOPY white	FRAME gunmetal / CANOPY gunmetal	FRAME bronze / CANOPY bronze	FRAME nickel / CANOPY nickel
LC LC	HVSBD 1113	HVSBD 1112	HVSBD 1111	HVSBD 1114	HVSBD 1117	HVSBD 1119



Austere-Solitaire RL

RL= long vertical rod 750 mm + powercord - Longer lengths available **on demand**
350mA - **required driver see below**
1 x LED array 6W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >93
FALSE ceiling= aperture: Ø45 - depth: min. 70mm (driver in ceiling) / depth: min. 50mm (driver remote)
CONCRETE ceiling= aperture: Ø45 - depth: min. 40mm (driver remote)
material: brass
SUSPENSION - IP50


	POWERCORD LENGTH	COVER brass POWERCORD black FRAME brass	COVER black POWERCORD black FRAME black	COVER white POWERCORD white FRAME white	COVER gunmetal POWERCORD black FRAME gunmetal	COVER bronze POWERCORD black FRAME bronze	COVER nickel POWERCORD black FRAME nickel
FALSE ceiling 	L 1000	HVCA 3013	HVCA 3012	HVCA 3011			
	L 2000	HVCA 3023	HVCA 3022	HVCA 3021			
	L 1000				HVCA 3014	HVCA 3017	HVCA 3019
	L 2000				HVCA 3024	HVCA 3027	HVCA 3029
CONCRETE ceiling 	L 1000	HVCC 3013	HVCC 3012	HVCC 3011			
	L 2000	HVCC 3023	HVCC 3022	HVCC 3021			
	L 1000				HVCC 3014	HVCC 3017	HVCC 3019
	L 2000				HVCC 3024	HVCC 3027	HVCC 3029

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Austere-Solitaire RL D+B

RL= long vertical rod of 750 mm + powercord - Longer lengths available **on demand**
230V - **driver in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50


DIM	POWERCORD LENGTH	COVER brass POWERCORD black FRAME brass	COVER black POWERCORD black FRAME black	COVER white POWERCORD white FRAME white	COVER gunmetal POWERCORD black FRAME gunmetal	COVER bronze POWERCORD black FRAME bronze	COVER nickel POWERCORD black FRAME nickel
LC	L 1000	HVCBD 3313	HVCBD 3312	HVCBD 3311			
LC	L 2000	HVCBD 3323	HVCBD 3322	HVCBD 3321			
LC	L 1000				HVCBD 3314	HVCBD 3317	HVCBD 3319
LC	L 2000				HVCBD 3324	HVCBD 3327	HVCBD 3329

DESIGN YOUR OWN AUSTERE-SUSPENSION - REMOTE MOUNTING

I. **Choose 1 x the CENTER length:** 500mm or 750mm

II. **Choose 2 x the same END lengths:** 250mm or 500mm

III. **Choose 4 x the same SIDE lengths:** 250mm or 500mm

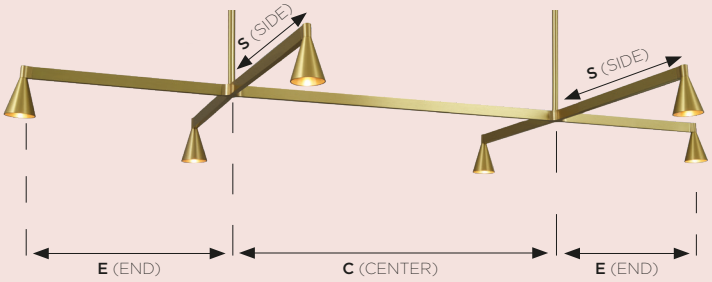


DIMENSIONS:

C 500mm + 2 x **E** 250mm + 4 x **S** 250mm	Total size **L**: 1120mm **W**: 590mm
C 500mm + 2 x **E** 250mm + 4 x **S** 500mm	Total size **L**: 1120mm **W**: 1090mm
C 500mm + 2 x **E** 500mm + 4 x **S** 250mm	Total size **L**: 1620mm **W**: 590mm
C 500mm + 2 x **E** 500mm + 4 x **S** 500mm	Total size **L**: 1620mm **W**: 1090mm
C 750mm + 2 x **E** 250mm + 4 x **S** 250mm	Total size **L**: 1370mm **W**: 590mm
C 750mm + 2 x **E** 250mm + 4 x **S** 500mm	Total size **L**: 1370mm **W**: 1090mm
C 750mm + 2 x **E** 500mm + 4 x **S** 250 mm	Total size **L**: 1870mm **W**: 590mm
C 750mm + 2 x **E** 500mm + 4 x **S** 500mm	Total size **L**: 1870mm **W**: 1090mm

IV. **Choose the colors and the vertical ROD:** RS 16, RL 79, RF 75 or RF 100

rod short: RS 16





rod long: RL 79





rod fixed: RF 75






*Total height depends on the chosen mounting option; see **NOTE** on product page.

Shorter vertical rod available **on demand** at additional cost.

rod fixed: RF 100





*Total height depends on the chosen mounting option; see **NOTE** on product page.

Shorter vertical rod available **on demand** at additional cost.

V. **Choose your cover or canopy for 'REMOTE MOUNTING' driver:**




cover C6
false/concrete* ceiling



False ceiling: **RS 16**, **RL 79**, **RF 75** & **RF 100**
Concrete ceiling: **RS 16** & **RL 79**
* **DRIVER remote**




cover C8
concrete ceiling



For **RF 75** & **RF 100**
DRIVER remote




canopy B10
false/concrete ceiling




For **RS 16**, **RL 79**, **RF 75** & **RF 100**
DRIVER remote

on demand



canopy B5
false/concrete ceiling



For **RS 16**, **RL 79**, **RF 75** & **RF 100**
DRIVER remote

on demand



cover 4,5 inch
false/concrete* ceiling



False ceiling: **RS 16**, **RL 79**, **RF 75** & **RF 100**
Concrete ceiling: **RS 16** & **RL 79**
* **DRIVER remote**

VI. **Choose your 'REMOTE MOUNTING' driver:**


driver: **TRIAC/IGBT** dimmable (**Only for 1Y, 2Y**)
driver: **1-10V** dimmable
driver: **PUSH-DIM** dimmable
driver: **DALI** dimmable

DESIGN YOUR OWN AUSTERE-SUSPENSION - SURFACE MOUNTING

I. **Choose 1 x the CENTER length:** 500mm or 750mm

II. **Choose 2 x the same END lengths:** 250mm or 500mm


III. **Choose 4 x the same SIDE lengths:** 250mm or 500mm

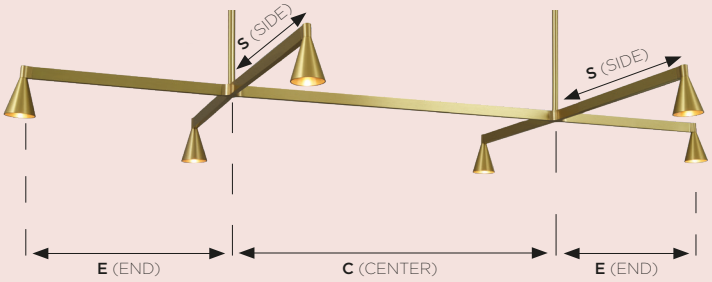


DIMENSIONS:

C 500mm + 2 x **E** 250mm + 4 x **S** 250mm	Total size **L**: 1120mm **W**: 590mm
C 500mm + 2 x **E** 250mm + 4 x **S** 500mm	Total size **L**: 1120mm **W**: 1090mm
C 500mm + 2 x **E** 500mm + 4 x **S** 250mm	Total size **L**: 1620mm **W**: 590mm
C 500mm + 2 x **E** 500mm + 4 x **S** 500mm	Total size **L**: 1620mm **W**: 1090mm
C 750mm + 2 x **E** 250mm + 4 x **S** 250mm	Total size **L**: 1370mm **W**: 590mm
C 750mm + 2 x **E** 250mm + 4 x **S** 500mm	Total size **L**: 1370mm **W**: 1090mm
C 750mm + 2 x **E** 500mm + 4 x **S** 250mm	Total size **L**: 1870mm **W**: 590mm
C 750mm + 2 x **E** 500mm + 4 x **S** 500mm	Total size **L**: 1870mm **W**: 1090mm


IV. **Choose the colors and the vertical ROD:** RS 16 or RL 79

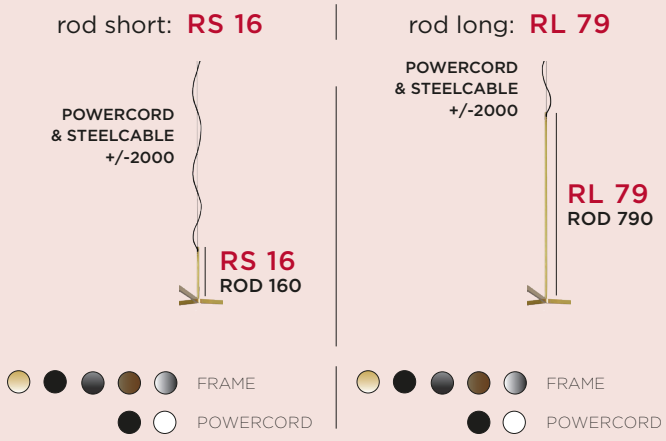

V. **Choose your base (driver incl.) for 'SURFACE MOUNTING':**

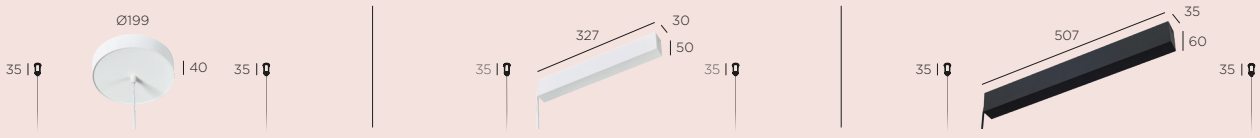

base B20




dimmable driver incl. in base

(1-10V / PUSH-DIM / DALI / TRIAC)


+ casambi possible

base B32



non-dimmable driver incl. in base

base B50



dimmable driver incl. in base

(1-10V / PUSH-DIM / DALI)

+ casambi possible

REMOTE MOUNTED DRIVER


Austere-Suspension 1+ RF 75

RF= fixed vertical rod 750mm - Shorter RF ROD available **on demand**
350mA - **required cover/canopy + required remote mounted driver see below**
6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Suspension 1+ RF 75 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling

aperture: Ø45 & depth: min. 60mm




white	22CO 1100
black	22CO 2200
brass	22CO 3300
gunmetal	22CO 4400
bronze	22CO 7700
nickel	22CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the suspension: **RF 75** with cover C6 will be **778mm**

cover C8
concrete ceiling


aperture: Ø30 & depth: min. 50mm



white	22CO 8001
black	22CO 8002
brass	22CO 8003
gunmetal	22CO 8004
bronze	22CO 8007
nickel	22CO 8009

NOTE: the total length of the suspension: **RF 75** with cover C8 will be **806mm**

canopy B10
false/concrete ceiling



white	22CP 1111
black	22CP 2222
brass	22CP 3333
gunmetal	22CP 4444
bronze	22CP 7777
nickel	22CP 9999

NOTE: the total length of the suspension: **RF 75** with canopy B10 will be **906mm**


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Suspension 1+ RF 75

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 40WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



C (CENTER LENGTH)
E (END LENGTH)
S (SIDE LENGTH)
S: 4 x 500mm **available on demand**
total dimensions SEE P. 186

CENTER LENGTH	END LENGTH	SIDE LENGTH	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
1x 500mm	2x 250mm	4x 250mm	1+ SU RF7 52223	1+ SU RF7 52222			
1x 500mm	2x 250mm	4x 250mm			1+ SU RF7 52224	1+ SU RF7 52227	1+ SU RF7 52229
1x 500mm	2x 500mm	4x 250mm	1+ SU RF7 55223	1+ SU RF7 55222			
1x 500mm	2x 500mm	4x 250mm			1+ SU RF7 55224	1+ SU RF7 55227	1+ SU RF7 55229
1x 750mm	2x 250mm	4x 250mm	1+ SU RF7 72223	1+ SU RF7 72222			
1x 750mm	2x 250mm	4x 250mm			1+ SU RF7 72224	1+ SU RF7 72227	1+ SU RF7 72229
1x 750mm	2x 500mm	4x 250mm	1+ SU RF7 75223	1+ SU RF7 75222			
1x 750mm	2x 500mm	4x 250mm			1+ SU RF7 75224	1+ SU RF7 75227	1+ SU RF7 75229

REMOTE MOUNTED DRIVER

Austere-Suspension 1+ RF 100

RF= fixed vertical rod 1000mm - Shorter RF ROD available **on demand**

350mA - **required cover/canopy + required remote mounted driver see below**

6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Suspension 1+ RF 100 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling

aperture: **Ø45** & depth: min. **60mm**




white	22CO 1100
black	22CO 2200
brass	22CO 3300
gunmetal	22CO 4400
bronze	22CO 7700
nickel	22CO 9900

NOTE: If the thickness of the false ceiling is 15mm, the total length of the suspension: **RF 100** with cover C6 will be **1028mm**

cover C8
concrete ceiling


aperture: **Ø30** & depth: min. **50mm**



white	22CO 8001
black	22CO 8002
brass	22CO 8003
gunmetal	22CO 8004
bronze	22CO 8007
nickel	22CO 8009

NOTE: the total length of the suspension: **RF 100** with cover C8 will be **1056mm**

canopy B10
false/concrete ceiling



white	22CP 1111
black	22CP 2222
brass	22CP 3333
gunmetal	22CP 4444
bronze	22CP 7777
nickel	22CP 9999

NOTE: the total length of the suspension: **RF 100** with canopy B10 will be **1156mm**

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**


REQUIRED REMOTE MOUNTED DRIVER for Austere-Suspension 1+ RF 75

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 40WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



C (CENTER LENGTH)
E (END LENGTH)
S (SIDE LENGTH)
S: 4 x 500mm **available on demand**
total dimensions SEE P. 186

CENTER LENGTH	END LENGTH	SIDE LENGTH	FRAME brass	FRAME black	FRAME gunmetal	FRAME bronze	FRAME nickel
1x 500mm	2x 250mm	4x 250mm	1+ SU RF10 52223	1+ SU RF10 52222			
1x 500mm	2x 250mm	4x 250mm			1+ SU RF10 52224	1+ SU RF10 52227	1+ SU RF10 52229
1x 500mm	2x 500mm	4x 250mm	1+ SU RF10 55223	1+ SU RF10 55222			
1x 500mm	2x 500mm	4x 250mm			1+ SU RF10 55224	1+ SU RF10 55227	1+ SU RF10 55229
1x 750mm	2x 250mm	4x 250mm	1+ SU RF10 72223	1+ SU RF10 72222			
1x 750mm	2x 250mm	4x 250mm			1+ SU RF10 72224	1+ SU RF10 72227	1+ SU RF10 72229
1x 750mm	2x 500mm	4x 250mm	1+ SU RF10 75223	1+ SU RF10 75222			
1x 750mm	2x 500mm	4x 250mm			1+ SU RF10 75224	1+ SU RF10 75227	1+ SU RF10 75229

REMOTE MOUNTED DRIVER

Austere-Suspension 1+ RS 16

RS= short vertical rod 160mm + powercord & steelcable 2000mm

350mA - required cover/canopy + required remote mounted driver **see below**

6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93


material: brass

SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Suspension 1+ RS 16 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm



white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009

cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**


REQUIRED REMOTE MOUNTED DRIVER for Austere-Suspension 1+ RS 16

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 40WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



C (CENTER LENGTH)
E (END LENGTH)
S (SIDE LENGTH)
S: 4 x 500mm **available on demand**
total dimensions SEE P. 186

+

CENTER LENGTH	END LENGTH	SIDE LENGTH	FRAME brass / POWERCORD black / STEELCABLE black	FRAME black / POWERCORD black / STEELCABLE black	FRAME brass / POWERCORD white / STEELCABLE silver	FRAME gunmetal / POWERCORD black / STEELCABLE black	FRAME bronze / POWERCORD black / STEELCABLE black	FRAME nickel / POWERCORD black / STEELCABLE black	FRAME nickel / POWERCORD white / STEELCABLE silver
1x 500mm	2x 250mm	4x 250mm	1+ SU RS 52223	1+ SU RS 52222	1+ SU RS 52213				
1x 500mm	2x 250mm	4x 250mm				1+ SU RS 52224	1+ SU RS 52227	1+ SU RS 52229	1+ SU RS 52219
1x 500mm	2x 500mm	4x 250mm	1+ SU RS 55223	1+ SU RS 55222	1+ SU RS 55213				
1x 500mm	2x 500mm	4x 250mm				1+ SU RS 55224	1+ SU RS 55227	1+ SU RS 55229	1+ SU RS 55219
1x 750mm	2x 250mm	4x 250mm	1+ SU RS 72223	1+ SU RS 72222	1+ SU RS 72213				
1x 750mm	2x 250mm	4x 250mm				1+ SU RS 72224	1+ SU RS 72227	1+ SU RS 72229	1+ SU RS 72219
1x 750mm	2x 500mm	4x 250mm	1+ SU RS 75223	1+ SU RS 75222	1+ SU RS 75213				
1x 750mm	2x 500mm	4x 250mm				1+ SU RS 75224	1+ SU RS 75227	1+ SU RS 75229	1+ SU RS 75219

REMOTE MOUNTED DRIVER


Austere-Suspension 1+ RL 79

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - required cover/canopy + required remote mounted driver **see below**
6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - IP50

REQUIRED COVER/CANOPY for Austere-Suspension 1+ RL 79 with REMOTE MOUNTED DRIVER

cover C6•
false ceiling


aperture: Ø45 & depth: min. 40mm



white	21CO 0001
black	21CO 0002
brass	21CO 0003
gunmetal	21CO 0004
bronze	21CO 0007
nickel	21CO 0009


cover C6
concrete ceiling

aperture: Ø45 & depth: min. 40mm



white	21CO 0011
black	21CO 0012
brass	21CO 0013
gunmetal	21CO 0014
bronze	21CO 0017
nickel	21CO 0019

canopy B10
false/concrete ceiling



white	21CP 1001
black	21CP 2002
brass	21CP 3003
gunmetal	21CP 4004
bronze	21CP 7007
nickel	21CP 9009


cover 4,5 inch• (113,5mm) or canopy B5 (Ø50 H45) available **on demand**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Suspension 1+ RL 79

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 40WT	230V (110V on demand)
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 60WD24V•	230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V - 230V

•driver only fits through cutout hole of fixture with C6 and 4,5", min. depth for driver in false ceiling: 280mm
driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

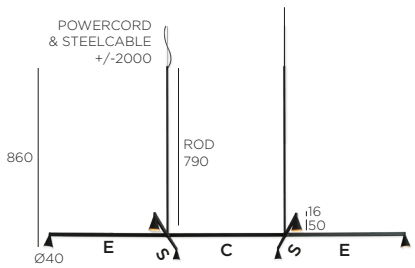

C (CENTER LENGTH)
E (END LENGTH)
S (SIDE LENGTH)
S: 4 x 500mm **available on demand**
total dimensions SEE P. 186

+

CENTER LENGTH	END LENGTH	SIDE LENGTH	FRAME brass / POWERCORD black / STEELCABLE black	FRAME black / POWERCORD black / STEELCABLE black	FRAME brass / POWERCORD white / STEELCABLE silver	FRAME gunmetal / POWERCORD black / STEELCABLE black	FRAME bronze / POWERCORD black / STEELCABLE black	FRAME nickel / POWERCORD black / STEELCABLE black	FRAME nickel / POWERCORD white / STEELCABLE silver
1x 500mm	2x 250mm	4x 250mm	1+ SU RL 52223	1+ SU RL 52222	1+ SU RL 52213				
1x 500mm	2x 250mm	4x 250mm				1+ SU RL 52224	1+ SU RL 52227	1+ SU RL 52229	1+ SU RL 52219
1x 500mm	2x 500mm	4x 250mm	1+ SU RL 55223	1+ SU RL 55222	1+ SU RL 55213				
1x 500mm	2x 500mm	4x 250mm				1+ SU RL 55224	1+ SU RL 55227	1+ SU RL 55229	1+ SU RL 55219
1x 750mm	2x 250mm	4x 250mm	1+ SU RL 72223	1+ SU RL 72222	1+ SU RL 72213				
1x 750mm	2x 250mm	4x 250mm				1+ SU RL 72224	1+ SU RL 72227	1+ SU RL 72229	1+ SU RL 72219
1x 750mm	2x 500mm	4x 250mm	1+ SU RL 75223	1+ SU RL 75222	1+ SU RL 75213				
1x 750mm	2x 500mm	4x 250mm				1+ SU RL 75224	1+ SU RL 75227	1+ SU RL 75229	1+ SU RL 75219

SURFACE MOUNTED DRIVER

Austere-Suspension 1+ RS 16 D+B

RS= short vertical rod 160mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - **IP50**

REQUIRED BASE (DRIVER INCL.) for Austere-Suspension 1+ RS 16

base B20

110V-230V - driver included in base
+ casambi possible



1-10 PU DA	white	BCDP 2401
1-10 PU DA	black	BCDP 2402
LC	white	BCT6 2401
LC	black	BCT6 2402

optional: **casambi** | D CAS |

base B32


230V - driver included in base



NO	white	BNDN 0811
NO	black	BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811
1-10 PU	black	BDPU 0822
DA PU	white	BDDA 0811
DA PU	black	BDDA 0822

optional: **casambi** | D CAS |



C (CENTER LENGTH)
E (END LENGTH)
S (SIDE LENGTH)
S: 4 x 500mm **available on demand**
total dimensions SEE P. 187

+

CENTER LENGTH	END LENGTH	SIDE LENGTH	FRAME brass / POWERCORD black / STEELCABLE black	FRAME black / POWERCORD black / STEELCABLE black	FRAME brass / POWERCORD white / STEELCABLE silver	FRAME gunmetal / POWERCORD black / STEELCABLE black	FRAME bronze / POWERCORD black / STEELCABLE black	FRAME nickel / POWERCORD black / STEELCABLE black	FRAME nickel / POWERCORD white / STEELCABLE silver
1x 500mm	2x 250mm	4x 250mm	1+ SU RS 52223	1+ SU RS 52222	1+ SU RS 52213				
1x 500mm	2x 250mm	4x 250mm				1+ SU RS 52224	1+ SU RS 52227	1+ SU RS 52229	1+ SU RS 52219
1x 500mm	2x 500mm	4x 250mm	1+ SU RS 55223	1+ SU RS 55222	1+ SU RS 55213				
1x 500mm	2x 500mm	4x 250mm				1+ SU RS 55224	1+ SU RS 55227	1+ SU RS 55229	1+ SU RS 55219
1x 750mm	2x 250mm	4x 250mm	1+ SU RS 72223	1+ SU RS 72222	1+ SU RS 72213				
1x 750mm	2x 250mm	4x 250mm				1+ SU RS 72224	1+ SU RS 72227	1+ SU RS 72229	1+ SU RS 72219
1x 750mm	2x 500mm	4x 250mm	1+ SU RS 75223	1+ SU RS 75222	1+ SU RS 75213				
1x 750mm	2x 500mm	4x 250mm				1+ SU RS 75224	1+ SU RS 75227	1+ SU RS 75229	1+ SU RS 75219

SURFACE MOUNTED DRIVER

Austere-Suspension 1+ RL 79 D+B

RL= long vertical rod 790mm + powercord & steelcable 2000mm
350mA - **required base (driver incl.) see below**
6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93
material: brass
SUSPENSION - **IP50**

REQUIRED BASE (DRIVER INCL.) for **Austere-**Suspension 1+ RL 79

base B20

110V-230V - driver included in base
+ casambi possible



1-10 PU DA	white	BCDP 2401
1-10 PU DA	black	BCDP 2402
LC	white	BCT6 2401
LC	black	BCT6 2402

optional: **casambi** | D CAS |

base B32


230V - driver included in base



NO	white	BNDN 0811
NO	black	BNDN 0822


base B50

230V - driver included in base
+ casambi possible



1-10 PU	white	BDPU 0811
1-10 PU	black	BDPU 0822
DA PU	white	BDDA 0811
DA PU	black	BDDA 0822


optional: **casambi** | D CAS |

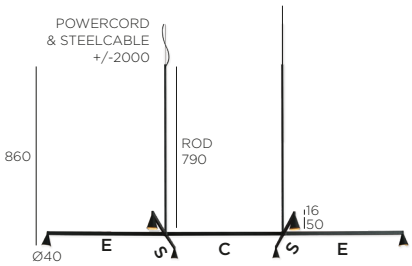

C (CENTER LENGTH)
E (END LENGTH)
S (SIDE LENGTH)
S: 4 x 500mm **available on demand**
total dimensions SEE P. 187

+

CENTER LENGTH	END LENGTH	SIDE LENGTH	FRAME brass / POWERCORD black / STEELCABLE black	FRAME black / POWERCORD black / STEELCABLE black	FRAME brass / POWERCORD white / STEELCABLE silver	FRAME gunmetal / POWERCORD black / STEELCABLE black	FRAME bronze / POWERCORD black / STEELCABLE black	FRAME nickel / POWERCORD black / STEELCABLE black	FRAME nickel / POWERCORD white / STEELCABLE silver
1x 500mm	2x 250mm	4x 250mm	1+ SU RL 52223	1+ SU RL 52222	1+ SU RL 52213				
1x 500mm	2x 250mm	4x 250mm				1+ SU RL 52224	1+ SU RL 52227	1+ SU RL 52229	1+ SU RL 52219
1x 500mm	2x 500mm	4x 250mm	1+ SU RL 55223	1+ SU RL 55222	1+ SU RL 55213				
1x 500mm	2x 500mm	4x 250mm				1+ SU RL 55224	1+ SU RL 55227	1+ SU RL 55229	1+ SU RL 55219
1x 750mm	2x 250mm	4x 250mm	1+ SU RL 72223	1+ SU RL 72222	1+ SU RL 72213				
1x 750mm	2x 250mm	4x 250mm				1+ SU RL 72224	1+ SU RL 72227	1+ SU RL 72229	1+ SU RL 72219
1x 750mm	2x 500mm	4x 250mm	1+ SU RL 75223	1+ SU RL 75222	1+ SU RL 75213				
1x 750mm	2x 500mm	4x 250mm				1+ SU RL 75224	1+ SU RL 75227	1+ SU RL 75229	1+ SU RL 75219



I-Tro


24Vdc - **required remote mounted driver see below**
1 lighting side: 120 x SMD LED 30W **(LED incl.)** - 24Vdc - 2280lm - 2850K - CRI >90
2 lighting sides: 240 x SMD LED 60W **(LED incl.)** - 24Vdc - 4560lm - 2850K - CRI >90
depth for driver in ceiling: min. 120mm
material: aluminium
SUSPENSION - IP30

	FRAME black ●	FRAME white ○
1 side	ITRO 1111	ITRO 2211
2 sides	ITRO 1122	ITRO 2222

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x 1 side	1-10 **(1-10V)**	D 40W10	110V-230V
1 x 2 sides	1-10 **(1-10V)**	D 60W10	110V-230V
2 x 1 side	1-10 **(1-10V)**	D 60W10	110V-230V


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



I-Tro D+B

100V-240V - **driver included in base** - 1-10 **(1-10V) dimmable**
1 lighting side: 120 x SMD LED 30W **(LED incl.)** - 24Vdc - 2280lm - 2850K - CRI >90
2 lighting sides: 240 x SMD LED 60W **(LED incl.)** - 24Vdc - 4560lm - 2850K - CRI >90
depth for driver in ceiling: min. 120mm
material: aluminium
SUSPENSION - IP30

	DIM	FRAME black ●	FRAME white ○
1 side	1-10	ITRO 1101	ITRO 2201
2 sides	1-10	ITRO 1102	ITRO 2202



N-Tro


24Vdc - **required remote mounted driver see below**
240 x SMD LED 60W **(LED incl.)** - 24Vdc - 4560lm - 2850K - CRI >90
depth for driver in ceiling: min. 120mm
material: aluminium
SUSPENSION - IP30

FRAME black	FRAME white
NTRO 1111	NTRO 2222

REQUIRED REMOTE MOUNTED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	1-10 **(1-10V)**	D 60W10	110V-230V


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



N-Tro D+B

100V-240V - **driver included in base** - 1-10 **(1-10V) dimmable**
240 x SMD LED 60W **(LED incl.)** - 24Vdc - 4560lm - 2850K - CRI >90
depth for driver in ceiling: min. 120 mm
material: aluminium
SUSPENSION - IP30


DIM	FRAME black	FRAME white
1-10	NTRO 1000	NTRO 2000



Sirens SU diffuser glass

110V-230V
E27 - only energy saving bulbs (LED or FLUO)
bulb size for **Ø210: max. Ø45mm L 115mm,** for **Ø265: max. Ø60mm L 175mm**
materials: aluminium, copper, diffuser glass
LED or FLUO bulb excluded - **SUSPENSION - IP50**


	FRAME black	FRAME white	FRAME copper
Ø210	SISU 2112	SISU 2111	
Ø265	SISU 2612	SISU 2611	
Ø210			SISU 2117
Ø265			SISU 2617



Sirens SU mirror

materials: aluminium, copper, mirror glass
SUSPENSION


	FRAME black	FRAME white	FRAME copper
Ø161	SISU 1602	SISU 1601	
Ø210	SISU 2102	SISU 2101	
Ø265	SISU 2602	SISU 2601	
Ø161			SISU 1607
Ø210			SISU 2107
Ø265			SISU 2607



Sirens SU frosted glass big mirror + edge mirror

110V-230V
E27 - only energy saving bulbs (LED or FLUO)
bulb size for **Ø210: max. Ø45mm L 115mm,** for **Ø265: max. Ø60mm L 175mm**
materials: aluminium, copper, frosted glass
LED or FLUO bulb excluded - **SUSPENSION - IP50**


	FRAME black	FRAME white	FRAME copper
Ø210	SISU 2122	SISU 2121	
Ø265	SISU 2622	SISU 2621	
Ø210			SISU 2127
Ø265			SISU 2627



Sirens SU frosted glass small mirror + edge mirror

110V-230V
E27 - only energy saving bulbs (LED or FLUO)
bulb size for **Ø210: max. Ø45mm L 115mm,** for **Ø265: max. Ø60mm L 175mm**
materials: aluminium, copper, frosted glass
LED or FLUO bulb excluded - **SUSPENSION - IP50**

	FRAME black	FRAME white	FRAME copper
Ø210	SISU 2132	SISU 2131	
Ø265	SISU 2632	SISU 2631	
Ø210			SISU 2137
Ø265			SISU 2637



Sirens SU frosted glass edge mirror

110V-230V
E27 - only energy saving bulbs (LED or FLUO)
bulb size for **Ø210: max. Ø45mm L 115mm,** for **Ø265: max. Ø60mm L 175mm**
materials: aluminium, copper, frosted glass
LED or FLUO bulb excluded - **SUSPENSION - IP50**

	FRAME black	FRAME white	FRAME copper
Ø210	SISU 2142	SISU 2141	
Ø265	SISU 2642	SISU 2641	
Ø210			SISU 2147
Ø265			SISU 2647

Bathroom



7TY BATHROOM

7y up BATHROOM 199



AUDINNI BATHROOM

Audinni BATHROOM 199



AUDINNO BATHROOM

Audinno BATHROOM 200



AUDY BATHROOM

Audy-In BATHROOM 201



BILO BATHROOM

Bilo C in FROSTED BATHROOM 202
Bilo C in MATT BATHROOM 203
Bilo W in FROSTED BATHROOM 204
Bilo W in MATT BATHROOM 205
Bilo up FROSTED BATHROOM 206
Bilo up MATT BATHROOM 206



BILY BATHROOM

Bily 16 BATHROOM 207
Bily 16 up BATHROOM 207

BOULO BATHROOM

Boulo C in FROSTED BATHROOM 208
Boulo C in MATT BATHROOM 209
Boulo W in FROSTED BATHROOM 210
Boulo W in MATT BATHROOM 211



BOULY BATHROOM

Bouly 4 BATHROOM 212
Bouly 16 BATHROOM 213



CODE BATHROOM

Code 1 GU10 BATHROOM 214
Code 1 LED BATHROOM 214
Code 2 GU10 BATHROOM 214
Code 2 LED BATHROOM 215
Code W G9 BATHROOM 215
Code W LED BATHROOM 216



◆ Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

7Ty up BATHROOM

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 11,8W **(LED incl.)** - 250mA - 913lm - 2700K - CRI >97
material: aluminium
CEILING - IP55

	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
	LC	STEP 1002◆	STEP 1001◆	STEP 1007◆	STEP 1008◆	STEP 1009◆
+ honeycomb	LC	STEP 1002H◆	STEP 1001H◆	STEP 1007H◆	STEP 1008H◆	STEP 1009H◆



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audinni BATHROOM

500mA - **required driver see below**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
*FALSE ceiling= aperture: Ø41 - depth: min. 100mm (driver in ceiling) / depth: min. 70mm (driver remote)
*CONCRETE ceiling= aperture: Ø41 - depth: min. 120mm (driver remote)
materials: brass, aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K	AUEXF 1273◆					
2700K		AUEXF 1272◆	AUEXF 1271◆			
2700K				AUEXF 1274◆	AUEXF 1277◆	AUEXF 1279◆
3000K	AUEXF 1303◆					
3000K		AUEXF 1302◆	AUEXF 1301◆			
3000K				AUEXF 1304◆	AUEXF 1307◆	AUEXF 1309◆

CONCRETE ceiling



	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K	AUEXC 1273◆					
2700K		AUEXC 1272◆	AUEXC 1271◆			
2700K				AUEXC 1274◆	AUEXC 1277◆	AUEXC 1279◆
3000K	AUEXC 1303◆					
3000K		AUEXC 1302◆	AUEXC 1301◆			
3000K				AUEXC 1304◆	AUEXC 1307◆	AUEXC 1309◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-4 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audinno BATHROOM

350mA - **required driver see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
*__FALSE ceiling=__ aperture: Ø41 - depth: min. 150mm (driver in ceiling) / depth: min. 110mm (driver remote)
*__CONCRETE ceiling=__ aperture: Ø41 - depth: min. 160mm (driver remote)
materials: brass, aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP50**

FALSE ceiling



	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K	AUOXF 1273◆					
2700K		AUOXF 1272◆	AUOXF 1271◆			
2700K				AUOXF 1274◆	AUOXF 1277◆	AUOXF 1279◆
3000K	AUOXF 1303◆					
3000K		AUOXF 1302◆	AUOXF 1301◆			
3000K				AUOXF 1304◆	AUOXF 1307◆	AUOXF 1309◆

CONCRETE ceiling



2700K	AUOXC 1273◆					
2700K		AUOXC 1272◆	AUOXC 1271◆			
2700K				AUOXC 1274◆	AUOXC 1277◆	AUOXC 1279◆
3000K	AUOXC 1303◆					
3000K		AUOXC 1302◆	AUOXC 1301◆			
3000K				AUOXC 1304◆	AUOXC 1307◆	AUOXC 1309◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audy-In BATHROOM

350mA - **required driver see below**
1 x LED array 6,25W **(incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
***FALSE ceiling=** aperture: Ø47 - depth: min. 70mm (driver in ceiling) / depth: min. 40mm (driver remote)
***CONCRETE ceiling=** aperture: Ø47 - depth: min. 90mm (driver remote)
materials: brass, aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE & CONCRETE ceiling




	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
2700K	AUDEX 1273◆	AUDEX 1272◆	AUDEX 1271◆			
2700K				AUDEX 1274◆	AUDEX 1277◆	AUDEX 1279◆
3000K	AUDEX 1303◆	AUDEX 1302◆	AUDEX 1301◆			
3000K				AUDEX 1304◆	AUDEX 1307◆	AUDEX 1309◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo C in FROSTED BATHROOM

500mA - **required driver see below**

1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90


***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)

***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)

materials: aluminium & transparant glass + screen printed inner side


*Required free air area, see **www.trizo21.com/requiredarea - CEILING** - **IP55**

FALSE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BCIXF 2000	BCIXF 1000	BCIXF 7000	BCIXF 8000	BCIXF 9000
2700K	BCIXF 2020	BCIXF 1020	BCIXF 7020	BCIXF 8020	BCIXF 9020

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000

CONCRETE ceiling



2300K	BCIXC 2002	BCIXC 1002	BCIXC 7002	BCIXC 8002	BCIXC 9002
2700K	BCIXC 2022	BCIXC 1022	BCIXC 7022	BCIXC 8022	BCIXC 9022


REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo C in MATT BATHROOM

500mA - **required driver see below**

1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90


***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)

***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)

materials: aluminium & sandblasted glass


*Required free air area, see **www.trizo21.com/requiredarea - CEILING** - **IP55**

FALSE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BCMXF 2000	BCMXF 1000	BCMXF 7000	BCMXF 8000	BCMXF 9000
2700K	BCMXF 2020	BCMXF 1020	BCMXF 7020	BCMXF 8020	BCMXF 9020

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000

CONCRETE ceiling



2300K	BCMXC 2002	BCMXC 1002	BCMXC 7002	BCMXC 8002	BCMXC 9002
2700K	BCMXC 2022	BCMXC 1022	BCMXC 7022	BCMXC 8022	BCMXC 9022


REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo W in FROSTED BATHROOM


350mA - **required driver see below**
1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90
***FALSE wall=** aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)
***CONCRETE wall=** aperture: Ø67 - depth: min. 100mm (driver remote)
materials: aluminium & transparant glass + screen printed inner side
*Required free air area, see **www.trizo21.com/requiredarea - WALL** - **IP55**

FALSE wall




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BWIXF 2000	BWIXF 1000	BWIXF 7000	BWIXF 8000	BWIXF 9000
2700K	BWIXF 2020	BWIXF 1020	BWIXF 7020	BWIXF 8020	BWIXF 9020

ACCESSORY FOR WALL: PLASTER KIT



Ø200 — aperture: Ø122 | PLBO 2000

CONCRETE wall




2300K	BWIXC 2002	BWIXC 1002	BWIXC 7002	BWIXC 8002	BWIXC 9002
2700K	BWIXC 2022	BWIXC 1022	BWIXC 7022	BWIXC 8022	BWIXC 9022

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo W in MATT BATHROOM

350mA - **required driver see below**

1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90


***FALSE wall=** aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)

***CONCRETE wall=** aperture: Ø67 - depth: min. 100mm (driver remote)

materials: aluminium & sandblasted glass


*Required free air area, see **www.trizo21.com/requiredarea - WALL** - **IP55**

FALSE wall




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BWMXF 2000	BWMXF 1000	BWMXF 7000	BWMXF 8000	BWMXF 9000
2700K	BWMXF 2020	BWMXF 1020	BWMXF 7020	BWMXF 8020	BWMXF 9020

ACCESSORY FOR WALL: PLASTER KIT



Ø200 — aperture: Ø122 | PLBO 2000

CONCRETE wall



2300K	BWMXC 2002	BWMXC 1002	BWMXC 7002	BWMXC 8002	BWMXC 9002
2700K	BWMXC 2022	BWMXC 1022	BWMXC 7022	BWMXC 8022	BWMXC 9022


REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo up FROSTED BATHROOM

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
materials: aluminium & transparant glass + screen-printed inner side
CEILING - IP50


	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	LC	BXUI 0002	BXUI 0001	BXUI 0007	BXUI 0008	BXUI 0009
2700K	LC	BXUI 0022	BXUI 0021	BXUI 0027	BXUI 0028	BXUI 0029



Bilo up MATT BATHROOM

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
materials: aluminium & sandblasted glass
CEILING - IP55


	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	LC	BXUM 0002	BXUM 0001	BXUM 0007	BXUM 0008	BXUM 0009
2700K	LC	BXUM 0022	BXUM 0021	BXUM 0027	BXUM 0028	BXUM 0029



Bily 16 BATHROOM


350mA - **required driver see below**
1 x LED array 11W **(incl.)** - 350mA - 1125lm - 2700K - CRI >97
***FALSE ceiling=** aperture: Ø67 - depth: min. 100mm (driver in ceiling) / depth: min. 100mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 150mm (driver remote)
materials: aluminium & transparant glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
silver LED HOLDER	BIEXF 1620	BIEXF 1610	BIEXF 1670	BIEXF 1680	BIEXF 1690
gold LED HOLDER	BIEXF 1628	BIEXF 1618	BIEXF 1678	BIEXF 1688	BIEXF 1698

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
silver LED HOLDER	BIEXC 1620	BIEXC 1610	BIEXC 1670	BIEXC 1680	BIEXC 1690
gold LED HOLDER	BIEXC 1628	BIEXC 1618	BIEXC 1678	BIEXC 1688	BIEXC 1698

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 15WT*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bily 16 up BATHROOM

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 11W **(LED incl.)** - 350mA - 1125lm - 2700K - CRI >97
materials: aluminium & transparant glass
CEILING - IP55


	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
silver LED HOLDER	LC	BUEX 1620	BUEX 1610	BUEX 1670	BUEX 1680	BUEX 1690
gold LED HOLDER	LC	BUEX 1628	BUEX 1618	BUEX 1678	BUEX 1688	BUEX 1698



Boulo C in FROSTED BATHROOM


500mA - **required driver see below**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)
materials: transparant glass + screen printed inner side
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



FALSE ceiling	**2300K**	BLCXI 1100	
FALSE ceiling	**2700K**	BLCXI 1120	

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




CONCRETE ceiling	**2300K**	BLCXI 1102	
CONCRETE ceiling	**2700K**	BLCXI 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Boulo C in MATT BATHROOM


500mA - **required driver see below**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)
material: sandblasted glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



FALSE ceiling	**2300K**	BLCXM 1100	
FALSE ceiling	**2700K**	BLCXM 1120	

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




CONCRETE ceiling	**2300K**	BLCXM 1102	
CONCRETE ceiling	**2700K**	BLCXM 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Boulo W in FROSTED BATHROOM


350mA - **required driver see below**
1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90
***FALSE wall=** aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)
***CONCRETE wall=** aperture: Ø67 - depth: min. 100mm (driver remote)
materials: transparant glass + screen printed inner side
*Required free air area, see **www.trizo21.com/requiredarea - WALL - IP55**

FALSE wall




FALSE wall	**2300K**	BLWXI 1100	
FALSE wall	**2700K**	BLWXI 1120	

ACCESSORY FOR WALL: PLASTER KIT



Ø200 — aperture: Ø122 | PLBO 2000

CONCRETE wall




CONCRETE wall	**2300K**	BLWXI 1102	
CONCRETE wall	**2700K**	BLWXI 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Boulo W in MATT BATHROOM


350mA - **required driver see below**
1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90
*FALSE wall= aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)
*CONCRETE wall= aperture: Ø67 - depth: min. 100mm (driver remote)
material: sandblasted glass
*Required free air area, see **www.trizo21.com/requiredarea - WALL - IP55**

FALSE wall




FALSE wall	**2300K**	BLWXM 1100	
FALSE wall	**2700K**	BLWXM 1120	

ACCESSORY FOR WALL: PLASTER KIT



Ø200 — aperture: Ø122 | PLBO 2000 |

CONCRETE wall




CONCRETE wall	**2300K**	BLWXM 1102	
CONCRETE wall	**2700K**	BLWXM 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Bouly 4 BATHROOM


350mA - **required driver see below**
1 x 4 LED array 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
*__FALSE ceiling=__ aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
*__CONCRETE ceiling=__ aperture: Ø67 - depth: min. 100mm (driver remote)
material: transparant glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



FALSE ceiling | **silver LED HOLDER** | BEWW 6010 ◆ |

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




CONCRETE ceiling | **silver LED HOLDER** | BEWW 6012 ◆ |

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 5W	230V
1 x	LC **(TRIAC/IGBT)**	D 3WT	110V-230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-3 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	110V-230V
1-3 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-8 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bouly 16 BATHROOM


350mA - **required driver see below**
1 x LED array 11W **(LED incl.)** - 350mA - 1125lm - 2700K - CRI >97
***FALSE ceiling=** aperture: Ø67 - depth: min. 100mm (driver in ceiling) / depth: min. 100mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 150mm (driver remote)
material: transparant glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



FALSE ceiling	**silver LED HOLDER**	BOEX 1600
FALSE ceiling	**gold LED HOLDER**	BOEX 1608

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling



CONCRETE ceiling	**silver LED HOLDER**	BOEX 1602
CONCRETE ceiling	**gold LED HOLDER**	BOEX 1680

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 15WT*	230V
1 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Code 1 GU10 BATHROOM


230V - GU10 - 1 x HALO QPAR16 max. 35W or 1 x GU10 LED
material: aluminium
Bulb excluded - CEILING - IP55

FRAME black	FRAME white	FRAME alu
COEX 3001	COEX 1001	COEX 2001



OPTIONAL COVER FOR CODE 1 BATHROOM & CODE 1 LED BATHROOM

ACEX 7055	ACEX 2055	ACEX 1055




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Code 1 LED BATHROOM

230V - **driver included in base -** NO **(non-dimmable)**
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP55

FRAME black	FRAME white	FRAME alu
COEX 2151◆	COEX 1151◆	COEX 7151◆



OPTIONAL COVER FOR CODE 1 BATHROOM & CODE 1 LED BATHROOM


ACEX 7055	ACEX 2055	ACEX 1055



Code 2 GU10 BATHROOM

230V - GU10 - 2 x HALO QPAR16 max. 35W or 2 x GU10 LED
material: aluminium
Bulbs excluded - CEILING - IP55

FRAME black	FRAME white	FRAME alu
COEX 3002	COEX 1002	COEX 2002




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Code 2 LED BATHROOM

230V - **driver included in base -** NO **(non-dimmable)**
1 x 8 LED 0,96W **(LED incl.)** - 350mA - 912lm - 2700K - CRI >93
material: aluminium
CEILING - IP55


	FRAME black	FRAME white	FRAME alu
	●	○	◒
	COEX 2251 ◆	COEX 1251 ◆	COEX 7251 ◆



Code W G9 BATHROOM


230V - G9 - 1 x HALO QT14 max. 60W or 1 x G9 LED (max. Ø19, max. L 62mm)
material: aluminium
Bulb excluded - WALL - IP55

	FRAME black	FRAME white	FRAME alu
	●	○	◒
230V - G9 HALO	CODE 2006	CODE 1006	CODE 7006
230V - G9 LED	CODE L2006	CODE L1006	CODE L7006



OPTIONAL COVER FOR CODE W BATHROOM

ACEX 2006	ACEX 1006	ACEX 7006



! **driver remote mounting excl. driver does not fit through cutout hole of fixture**

◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Code W LED BATHROOM

350mA - **required remote mounted driver see below**
1 lighting side: 1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
2 lighting sides: 2 x 4 LED 0,96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93
material: aluminium
WALL - IP55

	FRAME black	FRAME white	FRAME alu
1 side	COEX 2111◆	COEX 1111◆	COEX 7111◆
2 sides	COEX 2211◆	COEX 1211◆	COEX 7211◆



OPTIONAL COVER FOR CODE W LED BATHROOM

ACEX 2006 ACEX 1006 ACEX 7006

REQUIRED REMOTE MOUNTED DRIVER

DEVICE		DIM.	DRIVER	VOLT
1 x	1 side	LC **(TRIAC/IGBT)**	D 3WT«	230V
1 x	1 side	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP«	230V
2 x	1 side	LC **(TRIAC/IGBT)**	D 10WT«	230V
1-3 x	1 side	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP«	110V-230V
1-3 x	1 side	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU«	230V
1-3 x	1 side	DA **(DALI)**	D 15WDA EU-US**«	110V-230V
2-8 x	1 side	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V
1 x	2 sides	LC **(TRIAC/IGBT)**	D 10WT«	230V
1 x	2 sides	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP«	110V-230V
1 x	2 sides	DA **(DALI)**	D 15WDA«	110V-230V
1-4 x	2 sides	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
«driver fits behind optional cover for CODE W LED

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

Outdoor



7TY OUT

7y up OUT 218



AUDINNI OUT

Audinni OUT 218



AUDINNO OUT

Audinno OUT 219



AUDY OUT

Audy-In OUT 220



BILO OUT

Bilo C in FROSTED OUT 221

Bilo C in MATT OUT 222

Bilo up FROSTED OUT 222

Bilo up MATT OUT 223



BILY OUT

Bily 16 OUT 223

Bily 16 up OUT 224

BOULO OUT

Boulo C in FROSTED OUT 224

Boulo C in MATT OUT 225

Boulo W in FROSTED OUT 226

Boulo W in MATT OUT 227



BOULY OUT

Bouly 4 OUT 228

Bouly 16 OUT 229



CODE OUT

Code 1 GU10 OUT 229

Code 1 LED OUT 230

Code 2 GU10 OUT 230

Code 2 LED OUT 230

Code W G9 OUT 231

Code W LED OUT 231



◆ Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

7Ty up OUT

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 11,8W **(LED incl.)** - 250mA - 913lm - 2700K - CRI >97
material: aluminium
CEILING - IP55

DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
LC	STEP 1002◆	STEP 1001◆	STEP 1007◆	STEP 1008◆	STEP 1009◆



◆Choose beam:
M=medium 23° or
W=wide 40°

Audinni OUT

500mA - required driver **see below**
1 x LED array 4,32W **(LED incl.)** - 500mA - 2700K (487lm) or 3000K (517lm) - CRI >95
***FALSE ceiling=** aperture: Ø41 - depth: min. 100mm (driver in ceiling) / depth: min. 70mm (driver remote)
***CONCRETE ceiling=** aperture: Ø41 - depth: min. 120mm (driver remote)
material: aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FRAME black	FRAME white
●	○

FALSE ceiling



FALSE ceiling	**2700K**	AUEXF 1272◆	AUEXF 1271◆
FALSE ceiling	**3000K**	AUEXF 1302◆	AUEXF 1301◆

CONCRETE ceiling



CONCRETE ceiling	**2700K**	AUEXC 1272◆	AUEXC 1271◆
CONCRETE ceiling	**3000K**	AUEXC 1302◆	AUEXC 1301◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
2 x	LC **(TRIAC/IGBT)**	D 10WT500	230V
1-4 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆Choose beam:
M=medium 23° or
W=wide 40°

Audinno OUT

350mA - **required driver see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
*__FALSE ceiling=__ aperture: Ø41 - depth: min. 150mm (driver in ceiling) / depth: min. 110mm (driver remote)
*__CONCRETE ceiling=__ aperture: Ø41 - depth: min. 160mm (driver remote)
material: aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



		FRAME black	FRAME white
FALSE ceiling	**2700K**	AUOXF 1272◆	AUOXF 1271◆
FALSE ceiling	**3000K**	AUOXF 1302◆	AUOXF 1301◆

CONCRETE ceiling




		FRAME black	FRAME white
CONCRETE ceiling	**2700K**	AUOXC 1272◆	AUOXC 1271◆
CONCRETE ceiling	**3000K**	AUOXC 1302◆	AUOXC 1301◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



◆ Choose beam:
M=medium 23° or
W=wide 40°

Audy-In OUT

350mA - **required driver see below**
1 x LED array 6,25W **(incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
***FALSE ceiling=** aperture: Ø47 - depth: min. 70mm (driver in ceiling) / depth: min. 40mm (driver remote)
***CONCRETE ceiling=** aperture: Ø47 - depth: min. 90mm (driver remote)
material: aluminium
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE & CONCRETE ceiling




	FRAME black ●	FRAME white ○
2700K	AUDEX 1272◆	AUDEX 1271◆
3000K	AUDEX 1302◆	AUDEX 1301◆

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
2 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1-2 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-6 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo C in FROSTED OUT

500mA - **required driver see below**

1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90


***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)

***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)

materials: aluminium & transparant glass + screen printed inner side


*Required free air area, see **www.trizo21.com/requiredarea - CEILING** - **IP55**

FALSE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BCIXF 2000	BCIXF 1000	BCIXF 7000	BCIXF 8000	BCIXF 9000
2700K	BCIXF 2020	BCIXF 1020	BCIXF 7020	BCIXF 8020	BCIXF 9020

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000

CONCRETE ceiling



2300K	BCIXC 2002	BCIXC 1002	BCIXC 7002	BCIXC 8002	BCIXC 9002
2700K	BCIXC 2022	BCIXC 1022	BCIXC 7022	BCIXC 8022	BCIXC 9022


REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo C in MATT OUT


500mA - **required driver see below**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)materials: aluminium & sandblasted glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BCMXF 2000	BCMXF 1000	BCMXF 7000	BCMXF 8000	BCMXF 9000
2700K	BCMXF 2020	BCMXF 1020	BCMXF 7020	BCMXF 8020	BCMXF 9020

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000

CONCRETE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	BCMXC 2002	BCMXC 1002	BCMXC 7002	BCMXC 8002	BCMXC 9002
2700K	BCMXC 2022	BCMXC 1022	BCMXC 7022	BCMXC 8022	BCMXC 9022

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bilo C up FROSTED OUT

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 23OOK (564lm) or 2700K (587lm) - CRI >90
materials: aluminium & transparant glass + screen-printed inner side
CEILING - IP50


	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	LC	BXUI 0002	BXUI 0001	BXUI 0007	BXUI 0008	BXUI 0009
2700K	LC	BXUI 0022	BXUI 0021	BXUI 0027	BXUI 0028	BXUI 0029



Bilo C up MATT OUT

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
materials: aluminium & sandblasted glass
CEILING - IP55


DIM		FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
2300K	LC	BXUM 0002	BXUM 0001	BXUM 0007	BXUM 0008	BXUM 0009
2700K	LC	BXUM 0022	BXUM 0021	BXUM 0027	BXUM 0028	BXUM 0029



Bily 16 OUT


350mA - **required driver see below**
1 x LED array 11W **(incl.)** - 350mA - 1125lm - 2700K - CRI >97
***FALSE ceiling=** aperture: Ø67 - depth: min. 100mm (driver in ceiling) / depth: min. 100mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 150mm (driver remote)
materials: aluminium & transparant glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
silver LED HOLDER	BIEXF 1620	BIEXF 1610	BIEXF 1670	BIEXF 1680	BIEXF 1690
gold LED HOLDER	BIEXF 1628	BIEXF 1618	BIEXF 1678	BIEXF 1688	BIEXF 1698

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000

CONCRETE ceiling




	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
silver LED HOLDER	BIEXC 1620	BIEXC 1610	BIEXC 1670	BIEXC 1680	BIEXC 1690
gold LED HOLDER	BIEXC 1628	BIEXC 1618	BIEXC 1678	BIEXC 1688	BIEXC 1698

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 15WT*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bily 16 up OUT

230V - **driver included in base** - LC **(TRIAC/IGBT) dimmable**
1 x LED array 11W **(LED incl.)** - 350mA - 1125lm - 2700K - CRI >97
materials: aluminium & transparant glass
CEILING - IP55


	DIM	FRAME black	FRAME white	FRAME bronze	FRAME gold	FRAME alu
silver LED HOLDER	LC	BUEX 1620	BUEX 1610	BUEX 1670	BUEX 1680	BUEX 1690
gold LED HOLDER	LC	BUEX 1628	BUEX 1618	BUEX 1678	BUEX 1688	BUEX 1698



Boulo C in FROSTED OUT


500mA - **required driver see below**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)
materials: transparant glass + screen printed inner side
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling




FALSE ceiling	**2300K**	BLCXI 1100	
FALSE ceiling	**2700K**	BLCXI 1120	

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122	PLBO 2000	

CONCRETE ceiling




CONCRETE ceiling	**2300K**	BLCXI 1102	
CONCRETE ceiling	**2700K**	BLCXI 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Boulo C in MATT OUT


500mA - **required driver see below**
1 x 21 LED 0,2W **(LED incl.)** - 500mA - 2300K (564lm) or 2700K (587lm) - CRI >90
***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)
material: sandblasted glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



FALSE ceiling	**2300K**	BLCXM 1100	
FALSE ceiling	**2700K**	BLCXM 1120	

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




CONCRETE ceiling	**2300K**	BLCXM 1102	
CONCRETE ceiling	**2700K**	BLCXM 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 6WT500*	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP500	230V
1-4 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




Boulo W in FROSTED OUT

350mA - **required driver see below**
1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90
***FALSE wall=** aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)
***CONCRETE wall=** aperture: Ø67 - depth: min. 100mm (driver remote)
materials: transparant glass + screen printed inner side
*Required free air area, see **www.trizo21.com/requiredarea - WALL** - **IP55**




FALSE wall	**2300K**	BLWXI 1100	
FALSE wall	**2700K**	BLWXI 1120	

ACCESSORY FOR WALL: PLASTER KIT



Ø200 — aperture: Ø122 | PLBO 2000 |

CONCRETE wall




CONCRETE wall	**2300K**	BLWXI 1102	
CONCRETE wall	**2700K**	BLWXI 1122	

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Boulo W in MATT OUT


350mA - **required driver see below**
1 x 21 LED 0,14W **(LED incl.)** - 350mA - 2300K (400lm) or 2700K (417lm) - CRI >90
***FALSE wall=** aperture: Ø67 - depth: min. 70mm (driver in wall) / depth: min. 60mm (driver remote)
***CONCRETE wall=** aperture: Ø67 - depth: min. 100mm (driver remote)
material: sandblasted glass
*Required free air area, see **www.trizo21.com/requiredarea - WALL** - **IP55**

FALSE wall




FALSE wall	**2300K**	BLWXM 1100
FALSE wall	**2700K**	BLWXM 1120

ACCESSORY FOR WALL: PLASTER KIT



Ø200 — aperture: Ø122 | PLBO 2000

CONCRETE wall




CONCRETE wall	**2300K**	BLWXM 1102
CONCRETE wall	**2700K**	BLWXM 1122

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 3WT	230V
2 x	LC **(TRIAC/IGBT)**	D 6WT*	230V
1-2 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-2 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
3-12 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Bouly 4 OUT


350mA - **required driver see below**
1 x 4 LED array 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
***FALSE ceiling=** aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 100mm (driver remote)
material: transparant glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



FALSE ceiling | **silver LED HOLDER** | BEWW 6010 ◆ |

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling




CONCRETE ceiling | **silver LED HOLDER** | BEWW 6012 ◆ |

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 5W	230V
1 x	LC **(TRIAC/IGBT)**	D 3WT	110V-230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP	230V
1-3 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	110V-230V
1-3 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
2-8 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Bouly 16 OUT


350mA - **required driver see below**
1 x LED array 11W **(LED incl.)** - 350mA - 1125lm - 2700K - CRI >97
***FALSE ceiling=** aperture: Ø67 - depth: min. 100mm (driver in ceiling) / depth: min. 100mm (driver remote)
***CONCRETE ceiling=** aperture: Ø67 - depth: min. 150mm (driver remote)
material: transparant glass
*Required free air area, see **www.trizo21.com/requiredarea - CEILING - IP55**

FALSE ceiling



FALSE ceiling	**silver LED HOLDER**	BOEX 1600
FALSE ceiling	**gold LED HOLDER**	BOEX 1608

ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000 |

CONCRETE ceiling



CONCRETE ceiling	**silver LED HOLDER**	BOEX 1602
CONCRETE ceiling	**gold LED HOLDER**	BOEX 1680

REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	LC **(TRIAC/IGBT)**	D 15WT*	230V
1 x	LC **(TRIAC/IGBT)**	D 18WT	230V
1 x	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP	110V-230V
1 x	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU	230V
1 x	DA **(DALI)**	D 15WDA EU-US	110V-230V
1-3 x	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
***IP 44**


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



Code 1 GU10 OUT


230V - GU10 - 1 x HALO QPAR16 max. 35W or 1 x GU10 LED
material: aluminium
Bulb excluded - CEILING - IP55

FRAME black	FRAME white	FRAME alu
COEX 3001	COEX 1001	COEX 2001



OPTIONAL COVER FOR CODE 1 OUT & CODE 1 LED OUT

ACEX 7055	ACEX 2055	ACEX 1055




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Code 1 LED OUT

230V - **driver included in base -** NO **(non-dimmable)**
1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
material: aluminium
CEILING - IP55

FRAME black	FRAME white	FRAME alu
COEX 2151◆	COEX 1151◆	COEX 7151◆



OPTIONAL COVER FOR CODE 1 OUT & CODE 1 LED OUT


ACEX 7055	ACEX 2055	ACEX 1055



Code 2 GU10 OUT

230V - GU10 - 2 x HALO QPAR16 max. 35W or 2 x GU10 LED
material: aluminium
Bulbs excluded - CEILING - IP55

FRAME black	FRAME white	FRAME alu
COEX 3002	COEX 1002	COEX 2002




◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

Code 2 LED OUT

230V - **driver included in base -** NO **(non-dimmable)**
1 x 8 LED 0,96W **(LED incl.)** - 350mA - 912lm - 2700K - CRI >93
material: aluminium
CEILING - IP55


FRAME black	FRAME white	FRAME alu
COEX 2251◆	COEX 1251◆	COEX 7251◆



Code W G9 OUT


230V - G9 - 1 x HALO QT14 max. 60W or 1 x G9 LED (max. Ø19, max. L 62mm)
material: aluminium
Bulb excluded - WALL - IP55

	FRAME black	FRAME white	FRAME alu
230V - G9 HALO	CODE 2006	CODE 1006	CODE 7006
230V - G9 LED	CODE L2006	CODE L1006	CODE L7006



OPTIONAL COVER FOR CODE W OUT

ACEX 2006 ACEX 1006 ACEX 7006



◆ Choose beam:
N=narrow 10° or
M=medium 25° or
W=wide 40°

! driver remote mounting excl. driver does not fit through cutout hole of fixture

Code W LED OUT

350mA - **required remote mounted driver see below**
1 lighting side: 1 x 4 LED 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
2 lighting sides: 2 x 4 LED 0,96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93
material: aluminium
WALL - IP55

	FRAME black	FRAME white	FRAME alu
1 side	COEX 2111◆	COEX 1111◆	COEX 7111◆
2 sides	COEX 2211◆	COEX 1211◆	COEX 7211◆



OPTIONAL COVER FOR CODE W LED OUT

ACEX 2006 ACEX 1006 ACEX 7006

REQUIRED REMOTE MOUNTED DRIVER

DEVICE		DIM.	DRIVER	VOLT
1 x	1 side	NO **(non-dimmable)**	N 5W«	230V
1 x	1 side	LC **(TRIAC/IGBT)**	D 3WT«	230V
1 x	1 side	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 6WP«	230V
1-2 x	1 side	NO **(non-dimmable)**	N 12W**«	230V
2 x	1 side	LC **(TRIAC/IGBT)**	D 10WT«	230V
1-3 x	1 side	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP«	110V-230V
1-3 x	1 side	PU **(PUSH-DIM)** + DA **(DALI)**	D 15WDA EU«	230V
1-3 x	1 side	DA **(DALI)**	D 15WDA EU-US**«	110V-230V
2-8 x	1 side	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V
1 x	2 sides	LC **(TRIAC/IGBT)**	D 15WT«	230V
1 x	2 sides	LC **(TRIAC/IGBT)**	D 10WT«	230V
1 x	2 sides	PU **(PUSH-DIM)** + 1-10 **(1-10V)**	D 15WP«	110V-230V
1 x	2 sides	DA **(DALI)**	D 15WDA«	110V-230V
1-4 x	2 sides	PU **(PUSH-DIM)** + DA **(DALI)** + 1-10 **(1-10V)**	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture
«driver fits behind optional cover for CODE W LED


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

Track



2THIRTY

2Thirty Track 48V 234
2Thirty Track 230V 234



AUSTERE-SOLITAIRE

Austere-Solitaire RF75 Track 48V 241
Austere-Solitaire RF100 Track 48V 242



AUDY-SOLITAIRE

Audy-Solitaire RF75 Track 48V 238
Audy-Solitaire RF100 Track 48V 239



AUDETTE

Audette Track 48V 235
Audette-Duo Track 48V 236
Audette-Varié Track 48V 237



MINI-PI

Mini-Pi 1 Track 48V 243
Mini-Pi 2 Track 48V 243



AUSTIN

Austin Adjustable Track 48V 240

Track



T-PATH SUSPENDED MOUNTING

T-Path profile **247**
T-Path base SU **247**
T-Path canopy B45 **247**
T-Path power feed **247**
T-Path driver **248**
T-Path **E**-connector 180° **248**
T-Path **E**-connector 90° **248**
T-Path **E**-connector flexibel **248**
T-Path **+**-connector 180° **249**
T-Path **T**-connector **249**
T-Path Endplate **249**
T-Path Endplate open **249**
T-Path profile cover **249**




T-PATH SURFACE MOUNTING

T-Path profile **244**
T-Path curved profile **244**
T-Path inline driver **244**
T-Path driver **244**
T-Path power feed **245**
T-Path **E**-connector 180° **245**
T-Path **E**-connector 90° **245**
T-Path **E**-connector flexibel **245**
T-Path **+**-connector 180° **246**
T-Path **T**-connector **246**
T-Path Endplate **246**
T-Path Endplate open **246**
T-Path profile cover **246**



T-PATH RIMLESS MOUNTING

T-Path profile + bracket **250**
T-Path inline driver **250**
T-Path driver **250**
T-Path power feed **250**
T-Path **E**-connector 180° **251**
T-Path **E**-connector flexibel **251**
T-Path Endplate **251**
T-Path profile cover **251**




! driver not incl. in adapter
see REQUIRED DRIVER FOR ADAPTER 48V

◆ Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty Track 48V

48V - **adapter included - driver required for adapter 48V see below**
1 x LED array 11,8W **(LED incl.)** - 350mA - 1241lm - 2700K - CRI >97
materials: brass, aluminium
TRACK 48V - IP50




	ADAPTER black ROD black BODY black SWIVEL black RING black	ADAPTER black ROD black BODY black SWIVEL black RING bronze	ADAPTER black ROD black BODY black SWIVEL black RING gold	ADAPTER black ROD black BODY black SWIVEL black RING alu
	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●
	2T4 12723◆	2T4 17723◆	2T4 18723◆	2T4 19723◆
+ honeycomb	2T4 12723H◆	2T4 17723H◆	2T4 18723H◆	2T4 19723H◆

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	1-10 **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




◆ Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

2Thirty Track 230V

230V - **TRIAC dimmable**
1 x LED Module 10W **(LED incl.)** - 230V - 1000lm - 2700K - CRI >90
materials: brass, aluminium
TRACK 230V - IP50



	DIM	ADAPTER black ROD black BODY black SWIVEL black RING black	ADAPTER black ROD black BODY black SWIVEL black RING bronze	ADAPTER black ROD black BODY black SWIVEL black RING gold	ADAPTER black ROD black BODY black SWIVEL black RING alu
		● ● ● ● ●	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●
	LC	2T2 12223◆	2T2 17223◆	2T2 18223◆	2T2 19223◆
+ honeycomb	LC	2T2 12223H◆	2T2 17223H◆	2T2 18223H◆	2T2 19223H◆




! driver not incl. in adapter
see REQUIRED DRIVER FOR ADAPTER 48V

◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette Track 48V

48V - **adapter included** - **driver required for adapter 48V see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
TRACK 48V - IP50




		ADAPTER black SWIVEL brass BODY brass RING brass	ADAPTER white SWIVEL brass BODY brass RING brass	ADAPTER black SWIVEL black BODY black RING black	ADAPTER black SWIVEL white BODY white RING white	ADAPTER white SWIVEL white BODY white RING white
2700K		ADTR 2333◆	ADTW 2333◆			
2700K				ADTR 2222◆	ADTR 2111◆	ADTW 2111◆
3000K		ADTR 3333◆	ADTW 3333◆			
3000K				ADTR 3222◆	ADTR 3111◆	ADTW 3111◆
+ honeycomb	2700K	ADTR 2333H◆	ADTW 2333H◆			
+ honeycomb	2700K			ADTR 2222H◆	ADTR 2111H◆	ADTW 2111H◆
+ honeycomb	3000K	ADTR 3333H◆	ADTW 3333H◆			
+ honeycomb	3000K			ADTR 3222H◆	ADTR 3111H◆	ADTW 3111H◆

		ADAPTER black SWIVEL gunmetal BODY gunmetal RING gunmetal	ADAPTER black SWIVEL bronze BODY bronze RING bronze	ADAPTER black SWIVEL nickel BODY nickel RING nickel
2700K		ADTR 2444◆	ADTR 2777◆	ADTR 2999◆
3000K		ADTR 3444◆	ADTR 3777◆	ADTR 3999◆
+ honeycomb	2700K	ADTR 2444H◆	ADTR 2777H◆	ADTR 2999H◆
+ honeycomb	3000K	ADTR 3444H◆	ADTR 3777H◆	ADTR 3999H◆

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	1-10 **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




! driver not incl. in adapter
see REQUIRED DRIVER FOR ADAPTER 48V

◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette-Duo Track 48V

48V - **adapter included** - **driver required for adapter 48V see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
TRACK 48V - IP50




		ADAPTER black SWIVEL brass BODY brass RING black	ADAPTER black SWIVEL brass BODY brass RING white	ADAPTER white SWIVEL brass BODY brass RING white	ADAPTER black SWIVEL black BODY black RING brass	ADAPTER black SWIVEL white BODY white RING brass	ADAPTER white SWIVEL white BODY white RING brass
	2700K	ADTRD 2332◆	ADTRD 2331◆	ADTWD 2331◆			
	2700K				ADTRD 2223◆	ADTRD 2113◆	ADTWD 2113◆
	3000K	ADTRD 3332◆	ADTRD 3331◆	ADTWD 3331◆			
	3000K				ADTRD 3223◆	ADTRD 3113◆	ADTWD 3113◆
+ honeycomb	**2700K**	ADTRD 2332H◆	ADTRD 2331H◆	ADTWD 2331H◆			
+ honeycomb	**2700K**				ADTRD 2223H◆	ADTRD 2113H◆	ADTWD 2113H◆
+ honeycomb	**3000K**	ADTRD 3332H◆	ADTRD 3331H◆	ADTWD 3331H◆			
+ honeycomb	**3000K**				ADTRD 3223H◆	ADTRD 3113H◆	ADTWD 3113H◆

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	1-10 **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

gunmetal, bronze and **nickel** combinations on demand




! driver not incl. in adapter
see REQUIRED DRIVER FOR ADAPTER 48V

◆ Choose beam:
M=medium 23° or
W=wide 40°

Audette-Varié Track 48V

48V - **adapter included - driver required for adapter 48V see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
materials: brass, aluminium
TRACK 48V - IP50




		ADAPTER black · SWIVEL brass · BODY black · RING black	ADAPTER black · SWIVEL brass · BODY white · RING white	ADAPTER white · SWIVEL brass · BODY white · RING white
	2700K	ADTRD 2232◆	ADTRD 2131◆	ADTWD 2131◆
	3000K	ADTRD 3232◆	ADTRD 3131◆	ADTWD 3131◆
+ honeycomb	**2700K**	ADTRD 2232H◆	ADTRD 2131H◆	ADTWD 2131H◆
+ honeycomb	**3000K**	ADTRD 3232H◆	ADTRD 3131H◆	ADTWD 3131H◆

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	1-10 **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

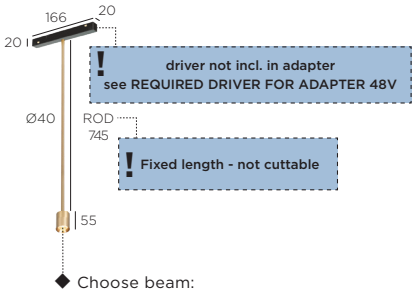

◆ Choose beam:
M=medium 23° or
W=wide 40°

Audy-Solitaire RF 75 Track 48V

48V - **adapter included - driver required for adapter 48V see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
material: brass
TRACK 48V - IP40


		ADAPTER black FRAME brass	ADAPTER white FRAME brass	ADAPTER black FRAME black	ADAPTER white FRAME black	ADAPTER white FRAME white
	2700K	AYTR 2703◆	AYTW 2703◆			
	2700K			AYTR 2702◆	AYTW 2702◆	AYTW 2701◆
	3000K	AYTR 3703◆	AYTW 3703◆			
	3000K			AYTR 3702◆	AYTW 3702◆	AYTW 3701◆
+ honeycomb	2700K	AYTR 2703H◆	AYTW 2703H◆			
+ honeycomb	2700K			AYTR 2702H◆	AYTW 2702H◆	AYTW 2701H◆
+ honeycomb	3000K	AYTR 3703H◆	AYTW 3703H◆			
+ honeycomb	3000K			AYTR 3702H◆	AYTW 3702H◆	AYTW 3701H◆

		ADAPTER black FRAME gunmetal	ADAPTER black FRAME bronze	ADAPTER black FRAME nickel
	2700K	AYTR 2704◆	AYTR 2707◆	AYTR 2709◆
	3000K	AYTR 3704◆	AYTR 3707◆	AYTR 3709◆
+ honeycomb	2700K	AYTR 2704H◆	AYTR 2707H◆	AYTR 2709H◆
+ honeycomb	3000K	AYTR 3704H◆	AYTR 3707H◆	AYTR 3709H◆

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	1-10 **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

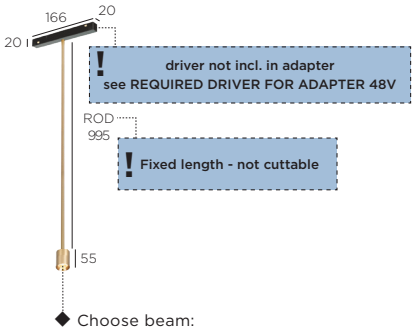

Audy-Solitaire RF 100 Track 48V

48V - **adapter included** - **driver required for adapter 48V see below**
1 x LED array 6,25W **(LED incl.)** - 350mA - 2700K (633lm) or 3000K (673lm) - CRI >95
material: brass
TRACK 48V - IP40


		ADAPTER black FRAME brass	ADAPTER white FRAME brass	ADAPTER black FRAME black	ADAPTER white FRAME black	ADAPTER white FRAME white
	2700K	AYTR 2903◆	AYTW 2903◆			
	2700K			AYTR 2902◆	AYTW 2902◆	AYTW 2901◆
	3000K	AYTR 3903◆	AYTW 3903◆			
	3000K			AYTR 3902◆	AYTW 3902◆	AYTW 3901◆
+ honeycomb	2700K	AYTR 2903H◆	AYTW 2903H◆			
+ honeycomb	2700K			AYTR 2902H◆	AYTW 2902H◆	AYTW 2901H◆
+ honeycomb	3000K	AYTR 3903H◆	AYTW 3903H◆			
+ honeycomb	3000K			AYTR 3902H◆	AYTW 3902H◆	AYTW 3901H◆

		ADAPTER black FRAME gunmetal	ADAPTER black FRAME bronze	ADAPTER black FRAME nickel
	2700K	AYTR 2904◆	AYTR 2707◆	AYTR 2709◆
	3000K	AYTR 3904◆	AYTR 3707◆	AYTR 3709◆
+ honeycomb	2700K	AYTR 2904H◆	AYTR 2707H◆	AYTR 2709H◆
+ honeycomb	3000K	AYTR 3904H◆	AYTR 3707H◆	AYTR 3709H◆

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	1-10 **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



! driver not incl. in adapter
see REQUIRED DRIVER FOR ADAPTER 48V

Austin Adjustable Track 48V

48V - **adapter included - driver required for adapter 48V see below**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
material: brass
TRACK 48V - IP40


ADAPTER black FRAME brass	ADAPTER white FRAME brass	ADAPTER black FRAME black	ADAPTER white FRAME black	ADAPTER white FRAME white
AUTR 1733	AUTW 1733	AUTR 1722	AUTW 1722	AUTW 1711

ADAPTER black FRAME gunmetal	ADAPTER black FRAME bronze	ADAPTER black FRAME nickel
AUTR 1744	AUTR 1777	AUTR 1799

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	1-10 **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

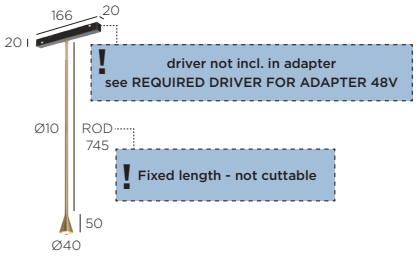

Austere-Solitaire RF 75 Track 48V

48V - **adapter included -** driver required for adapter 48V **see below**

1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93

material: brass

TRACK 48V - IP50


ADAPTER black / FRAME brass	ADAPTER white / FRAME brass	ADAPTER black / FRAME black	ADAPTER white / FRAME black	ADAPTER white / FRAME white
HVSU 4773	HVSW 4773	HVSU 4772	HVSW 4772	HVSW 4771

ADAPTER black / FRAME gunmetal	ADAPTER black / FRAME bronze	ADAPTER black / FRAME nickel
HVSU 4774	HVSU 4777	HVSU 4779

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	1-10 **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

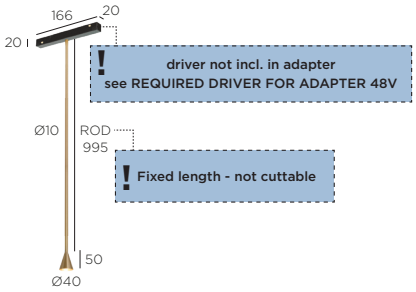

Austere-Solitaire RF 100 Track 48V

48V - **adapter included -** **driver required for adapter 48V see below**

1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93

material: brass


TRACK 48V - IP50

ADAPTER	FRAME	
black	brass	HVSU 4793
white	brass	HVSW 4793
black	black	HVSU 4792
white	black	HVSW 4792
white	white	HVSW 4791
black	gunmetal	HVSU 4794
black	bronze	HVSU 4797
black	nickel	HVSU 4799

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	HO **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



! driver not incl. in adapter
see REQUIRED DRIVER FOR ADAPTER 48V

◆ Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

Mini-Pi 1 Track 48V


48V - **adapter included -** driver required for adapter 48V **see below**
1 x 4 LED array 0,96W **(LED incl.)** - 350mA - 456lm - 2700K - CRI >93
material: aluminium
TRACK 48V - IP40 □

ADAPTER black FRAME black	ADAPTER black FRAME white	ADAPTER white FRAME white
● ●	● ○	○ ○
MIPI 4712◆	MIPI 4711◆	MIPW 4711◆

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 14W	48V
1 x	1-10 **(1-10V)**	D 13WP	48V
1 x	DA **(DALI)**	D 13WD	48V
1 x	CA **(CASAMBI)**	D 30WD CAS	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



! driver not incl. in adapter
see REQUIRED DRIVER FOR ADAPTER 48V

◆ Choose beam:
N=narrow 12° or
M=medium 24° or
W=wide 40°

Mini-Pi 2 Track 48V


48V - **adapter included -** driver required for adapter 48V **see below**
2 x 4 LED array 0,96W **(LED incl.)** - 350mA - 2 x 456lm - 2700K - CRI >93
material: aluminium
TRACK 48V - IP40 □

ADAPTER black FRAME black	ADAPTER black FRAME white	ADAPTER white FRAME white
● ●	● ○	○ ○
MIPI 4722◆	MIPI 4721◆	MIPW 4721◆

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER	VOLT
1 x	1-10 **(1-10V)**	D 13WP	48V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**




SURFACE MOUNTING


T-Path profile 48V

48V - **driver required for T-Path** (T-Path base or T-Path driver)
material: aluminium
TRACK 48V

LENGTH	FRAME black	FRAME white
1000	TPCM 1002	TPCM 1001
2000	TPCM 2002	TPCM 2001




T-Path curved profile 48V



48V - **driver required for T-Path** (T-Path base or T-Path driver)
material: aluminium
TRACK 48V

FRAME black	FRAME white
TPCC 0902	TPCC 0901

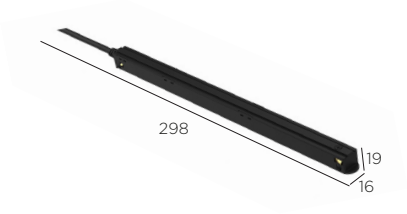

T-Path inline driver

230V - **driver included in base -** NO **(non-dimmable)** max. 100W
material: pc
TRACK 48V

DIM	FRAME black	FRAME white
NO	N 100W 0002	N 100W 0001

T-Path driver (remote)


REQUIRED DRIVER FOR REMOTE MOUNTING

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 75W	230V
1 x	NO **(non-dimmable)**	N 150W	230V
1 x	NO **(non-dimmable)**	N 240W	230V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**

PROJECT PRICE ON REQUEST


SURFACE MOUNTING



T-Path power feed

48V
material: pc
TRACK 48V


	FRAME black	FRAME white
LEFT	TPPL 1002	TPPL 1001
RIGHT	TPPR 1002	TPPR 1001



T-Path E-connector 180° 48V

48V
material: pc
TRACK 48V

FRAME black	FRAME white
TPEC 1802	TPEC 1801



T-Path E-connector 90° 48V

48V
material: pc
TRACK 48V

	FRAME black	FRAME white
INTERNAL	TPCI 0902	TPCI 0901
EXTERNAL	TPCE 0902	TPCE 0901




T-Path E-connector flexibel 48V

48V
material: pc
TRACK 48V

FRAME black	FRAME white
TPEF 0002	TPEF 0001

PROJECT PRICE
ON REQUEST


SURFACE MOUNTING



T-Path +-connector 180° 48V

48V
material: pc
TRACK 48V

	FRAME black	FRAME white
	●	○
	TPC+ 0002	TPC+ 0001



T-Path T-connector 48V

48V
material: pc
TRACK 48V


	FRAME black	FRAME white
	●	○
	TPCT 0002	TPCT 0001



T-Path Endplate

material: pc
TRACK 48V


	FRAME black	FRAME white
	●	○
	TPEP 2002	TPEP 2001



T-Path Endplate open

material: pc
TRACK 48V

	FRAME black	FRAME white
	●	○
	TPOP 2002	TPOP 2001



T-Path profile cover


material: pc
TRACK 48V

LENGTH	FRAME black	FRAME white
	●	○
1000	TPCO 1002	TPCO 1001
2000	TPCO 2002	TPCO 2001

PROJECT PRICE
ON REQUEST

SUSPENDED MOUNTING


T-Path profile 48V



48V - driver required for T-Path (T-Path base or T-Path driver)
material: aluminium
TRACK 48V

LENGTH	FRAME black	FRAME white
1000	TPSP 1002	TPSP 1001
2000	TPSP 2002	TPSP 2001

T-Path base SU



230V - **driver included in base -** NO **(non-dimmable)** max. 175W
material: aluminium
TRACK 48V

FRAME black	FRAME white
21BO 0002	21BO 0001


T-Path canopy B45



material: aluminium

FRAME black	FRAME white
21CP 5000	21CP 4000

T-Path power feed



48V
material: pc
TRACK 48V

	FRAME black	FRAME white
LEFT	TPPL 1002	TPPL 1001
RIGHT	TPPR 1002	TPPR 1001

PROJECT PRICE ON REQUEST


SUSPENDED MOUNTING

T-Path driver (remote)

REQUIRED DRIVER FOR REMOTE MOUNTING

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 75W	230V
1 x	NO **(non-dimmable)**	N 150W	230V
1 x	NO **(non-dimmable)**	N 240W	230V


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



T-Path E-connector 180° 48V

48V
material: pc
TRACK 48V


	FRAME black	FRAME white
	●	○
	TPSC 1802	TPSC 1801



T-Path E-connector 90° 48V

48V
material: pc
TRACK 48V

	FRAME black	FRAME white
	●	○
INTERNAL	TPCI 0902	TPCI 0901
EXTERNAL	TPCE 0902	TPCE 0901




T-Path E-connector flexibel 48V

48V
material: pc
TRACK 48V

	FRAME black	FRAME white
	●	○
	TPEF 0002	TPEF 0001

PROJECT PRICE ON REQUEST


SUSPENDED MOUNTING



T-Path +-connector 48V

48V
material: pc
TRACK 48V

	FRAME black	FRAME white
	●	○
	TPC+ 0002	TPC+ 0001



T-Path T-connector 48V

48V
material: pc
TRACK 48V


	FRAME black	FRAME white
	●	○
	TPCT 0002	TPCT 0001



T-Path Endplate

material: metal
TRACK 48V


	FRAME black	FRAME white
	●	○
	TPEP 2002	TPEP 2001



T-Path Endplate open

material: metal
TRACK 48V

	FRAME black	FRAME white
	●	○
	TPOP 2002	TPOP 2001



T-Path profile cover


material: pc
TRACK 48V

LENGTH	FRAME black	FRAME white
	●	○
1000	TPCO 1002	TPCO 1001
2000	TPCO 2002	TPCO 2001

PROJECT PRICE ON REQUEST

RIMLESS MOUNTING

T-Path profile 48V + bracket (4x p/m)



48V - **required remote mounted driver**
Bracket for rimless mounting incl. (4 pieces / meter)
material: aluminium
TRACK 48V

LENGTH	FRAME black
1000	TPRI 1002
2000	TPRI 2002

T-Path inline driver



230V - **driver included in base -** NO **(non-dimmable)** max. 100W
material: aluminium
TRACK 48V


DIM	FRAME black	FRAME white
NO	N 100W 0002	N 100W 0001

T-Path driver (remote)

REQUIRED DRIVER FOR REMOTE MOUNTING

DEVICE	DIM.	DRIVER	VOLT
1 x	NO **(non-dimmable)**	N 75W	230V
1 x	NO **(non-dimmable)**	N 150W	230V
1 x	NO **(non-dimmable)**	N 240W	230V

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see **www.trizo21.com/drivers**



T-Path power feed


48V
material: pc
TRACK 48V

	FRAME black	FRAME white
LEFT	TPPL 1002	TPPL 1001
RIGHT	TPPR 1002	TPPR 1001

PROJECT PRICE ON REQUEST

RIMLESS MOUNTING


T-Path E-connector 180° 48V



48V
material: aluminium
TRACK 48V

	FRAME black	FRAME white
	●	○
	TPREC 1802	TPREC 1801


T-Path E-connector flexibel 48V



48V
material: aluminium
TRACK 48V

	FRAME black
	●
	TPREF 0002


T-Path Endplates (2 pieces)



material: pc
TRACK 48V

	FRAME black
	●
	TPREP 0002

T-Path profile cover



material: pc
TRACK 48V

LENGTH	FRAME black	FRAME white
	●	○
1000	TPCO 1002	TPCO 1001
2000	TPCO 2002	TPCO 2001

PROJECT PRICE ON REQUEST

Productcodes

1+ SU RF7 52222 188
1+ SU RF7 52223 188
1+ SU RF7 52224 188
1+ SU RF7 52227 188
1+ SU RF7 52229 188
1+ SU RF7 55222 188
1+ SU RF7 55223 188
1+ SU RF7 55224 188
1+ SU RF7 55227 188
1+ SU RF7 55229 188
1+ SU RF7 72222 188
1+ SU RF7 72223 188
1+ SU RF7 72224 188
1+ SU RF7 72227 188
1+ SU RF7 72229 188
1+ SU RF7 75222 188
1+ SU RF7 75223 188
1+ SU RF7 75224 188
1+ SU RF7 75227 188
1+ SU RF7 75229 188
1+ SU RF10 52222 189
1+ SU RF10 52223 189
1+ SU RF10 52224 189
1+ SU RF10 52227 189
1+ SU RF10 52229 189
1+ SU RF10 55222 189
1+ SU RF10 55223 189
1+ SU RF10 55224 189
1+ SU RF10 55227 189
1+ SU RF10 55229 189
1+ SU RF10 72222 189
1+ SU RF10 72223 189
1+ SU RF10 72224 189
1+ SU RF10 72227 189
1+ SU RF10 72229 189
1+ SU RF10 75222 189
1+ SU RF10 75223 189
1+ SU RF10 75224 189
1+ SU RF10 75227 189
1+ SU RF10 75229 189
1+ SU RL 52213 191
1+ SU RL 52213 193
1+ SU RL 52219 191
1+ SU RL 52219 193
1+ SU RL 52222 191
1+ SU RL 52222 193
1+ SU RL 52223 191
1+ SU RL 52223 193
1+ SU RL 52224 191
1+ SU RL 52224 193
1+ SU RL 52227 191
1+ SU RL 52227 193
1+ SU RL 52229 191
1+ SU RL 52229 193
1+ SU RL 55213 191
1+ SU RL 55213 193
1+ SU RL 55219 191
1+ SU RL 55219 193
1+ SU RL 55222 191
1+ SU RL 55222 193
1+ SU RL 55223 191
1+ SU RL 55223 193
1+ SU RL 55224 191
1+ SU RL 55224 193
1+ SU RL 55227 188
1+ SU RL 55227 188
1+ SU RL 55229 188
1+ SU RL 55229 188
1+ SU RL 72213 188
1+ SU RL 72213 188
1+ SU RL 72219 188
1+ SU RL 72219 188
1+ SU RL 72222 188
1+ SU RL 72222 188
1+ SU RL 72223 188
1+ SU RL 72223 188
1+ SU RL 72224 188
1+ SU RL 72224 188
1+ SU RL 72227 188
1+ SU RL 72227 188
1+ SU RL 72229 188
1+ SU RL 72229 188
1+ SU RL 75213 188
1+ SU RL 75213 188
1+ SU RL 75219 189
1+ SU RL 75219 189
1+ SU RL 75222 189
1+ SU RL 75222 189
1+ SU RL 75223 189
1+ SU RL 75223 189
1+ SU RL 75224 189
1+ SU RL 75224 189
1+ SU RL 75227 189
1+ SU RL 75227 189
1+ SU RL 75229 189
1+ SU RL 75229 189
1+ SU RS 52213 189
1+ SU RS 52213 189
1+ SU RS 52219 189
1+ SU RS 52219 189
1+ SU RS 52222 189
1+ SU RS 52222 189
1+ SU RS 52223 189
1+ SU RS 52223 189
1+ SU RS 52224 191
1+ SU RS 52224 193
1+ SU RS 52227 191
1+ SU RS 52227 193
1+ SU RS 52229 191
1+ SU RS 52229 193
1+ SU RS 55213 191
1+ SU RS 55213 193
1+ SU RS 55219 191
1+ SU RS 55219 193
1+ SU RS 55222 191
1+ SU RS 55222 193
1+ SU RS 55223 191
1+ SU RS 55223 193
1+ SU RS 55224 191
1+ SU RS 55224 193
1+ SU RS 55227 191
1+ SU RS 55227 193
1+ SU RS 55229 191
1+ SU RS 55229 193
1+ SU RS 72213 191
1+ SU RS 72213 193
1+ SU RS 72219 191
1+ SU RS 72219 193
1+ SU RS 72222 191
1+ SU RS 72222 193
1+ SU RS 72223 191
1+ SU RS 72223 193
1+ SU RS 72224 191
1+ SU RS 72224 193
1+ SU RS 72227 191
1+ SU RS 72227 193
1+ SU RS 72229 191
1+ SU RS 72229 193
1+ SU RS 75213 191
1+ SU RS 75213 193
1+ SU RS 75219 191
1+ SU RS 75219 193
1+ SU RS 75222 191
1+ SU RS 75222 193
1+ SU RS 75223 191
1+ SU RS 75223 193
1+ SU RS 75224 191
1+ SU RS 75224 193
1+ SU RS 75227 191
1+ SU RS 75227 193
1+ SU RS 75229 191
1+ SU RS 75229 193
1X RF7 2022 191
1X RF7 2023 193
1X RF7 2024 191
1X RF7 2027 193
1X RF7 2029 191
1X RF7 5022 193
1X RF7 5023 191
1X RF7 5024 193
1X RF7 5027 190
1X RF7 5029 192
1X RF7 7022 190
1X RF7 7023 192
1X RF7 7024 190
1X RF7 7027 192
1X RF7 7029 190
1X RF10 2022 192
1X RF10 2023 190
1X RF10 2024 192
1X RF10 2027 190
1X RF10 2029 192
1X RF10 5022 190
1X RF10 5023 192
1X RF10 5024 190
1X RF10 5027 192
1X RF10 5029 190
1X RF10 7022 192
1X RF10 7023 190
1X RF10 7024 192
1X RF10 7027 190
1X RF10 7029 192
1X RL 2013 190
1X RL 2013 192
1X RL 2019 190
1X RL 2019 192
1X RL 2022 190
1X RL 2022 192
1X RL 2023 190
1X RL 2023 192
1X RL 2024 190
1X RL 2024 192
1X RL 2027 190
1X RL 2027 192
1X RL 2029 190
1X RL 2029 192
1X RL 5013 190
1X RL 5013 192
1X RL 5019 190
1X RL 5019 192
1X RL 5022 190
1X RL 5022 192
1X RL 5023 190
1X RL 5023 192
1X RL 5024 190
1X RL 5024 192
1X RL 5027 190
1X RL 5027 192
1X RL 5029 190
1X RL 5029 192
1X RL 7013 190
1X RL 7013 192
1X RL 7019 190
1X RL 7019 192
1X RL 7022 190
1X RL 7022 192
1X RL 7023 162
1X RL 7023 162
1X RL 7024 162
1X RL 7024 162
1X RL 7027 162
1X RL 7027 162
1X RL 7029 162
1X RL 7029 162
1X RS 2013 162
1X RS 2013 162
1X RS 2019 162
1X RS 2019 162
1X RS 2022 162
1X RS 2022 162
1X RS 2023 163
1X RS 2023 163
1X RS 2024 163
1X RS 2024 163
1X RS 2027 163
1X RS 2027 163
1X RS 2029 163
1X RS 2029 163
1X RS 5013 163
1X RS 5013 163
1X RS 5019 163
1X RS 5019 163
1X RS 5022 163
1X RS 5022 163
1X RS 5023 163
1X RS 5023 163
1X RS 5024 165
1X RS 5024 167
1X RS 5027 165
1X RS 5027 167
1X RS 5029 165
1X RS 5029 167
1X RS 7013 165
1X RS 7013 167
1X RS 7019 165
1X RS 7019 167
1X RS 7022 165
1X RS 7022 167
1X RS 7023 165
1X RS 7023 167
1X RS 7024 165
1X RS 7024 167
1X RS 7027 165
1X RS 7027 167
1X RS 7029 165
1X RS 7029 167
1Y RF7 2022 144
1Y RF7 2023 144
1Y RF7 2024 144
1Y RF7 2027 144
1Y RF7 2029 144
1Y RF7 5022 144
1Y RF7 5023 144
1Y RF7 5024 144
1Y RF7 5027 144
1Y RF7 5029 144
1Y RF7 7022 144
1Y RF7 7023 144
1Y RF7 7024 144
1Y RF7 7027 144
1Y RF7 7029 144
1Y RF10 2022 145
1Y RF10 2023 145
1Y RF10 2024 145
1Y RF10 2027 145
1Y RF10 2029 145
1Y RF10 5022 145
1Y RF10 5023 145
1Y RF10 5024 145
1Y RF10 5027 145
1Y RF10 5029 145
1Y RF10 7022 145
1Y RF10 7023 145
1Y RF10 7024 145
1Y RF10 7027 145
1Y RF10 7029 145
1Y RL 2013 147
1Y RL 2013 149
1Y RL 2019 147
1Y RL 2019 149
1Y RL 2022 147
1Y RL 2022 149
1Y RL 2023 147
1Y RL 2023 149
1Y RL 2024 147
1Y RL 2024 149
1Y RL 2027 147
1Y RL 2027 149
1Y RL 2029 147
1Y RL 2029 149
1Y RL 5013 147
1Y RL 5013 149
1Y RL 5019 147
1Y RL 5019 149
1Y RL 5022 147
1Y RL 5022 149
1Y RL 5023 147
1Y RL 5023 149
1Y RL 5024 147
1Y RL 5024 149
1Y RL 5027 147
1Y RL 5027 149
1Y RL 5029 147
1Y RL 5029 149
1Y RL 7013 147
1Y RL 7013 149
1Y RL 7019 147
1Y RL 7019 149
1Y RL 7022 147
1Y RL 7022 149
1Y RL 7023 147
1Y RL 7023 149
1Y RL 7024 147
1Y RL 7024 149
1Y RL 7027 147
1Y RL 7027 149
1Y RL 7029 147
1Y RL 7029 149
1Y RS 2013 146
1Y RS 2013 148
1Y RS 2019 146
1Y RS 2019 148
1Y RS 2022 146
1Y RS 2022 148
1Y RS 2023 146
1Y RS 2023 148
1Y RS 2024 146
1Y RS 2024 148
1Y RS 2027 146
1Y RS 2027 148
1Y RS 2029 146
1Y RS 2029 148
1Y RS 5013 146
1Y RS 5013 148
1Y RS 5019 146
1Y RS 5019 148
1Y RS 5022 146
1Y RS 5022 148
1Y RS 5023 146
1Y RS 5023 148
1Y RS 5024 146
1Y RS 5024 148
1Y RS 5027 146
1Y RS 5027 148
1Y RS 5029 146
1Y RS 5029 148
1Y RS 7013 146
1Y RS 7013 148
1Y RS 7019 146
1Y RS 7019 148
1Y RS 7022 146
1Y RS 7022 148
1Y RS 7023 146
1Y RS 7023 148
1Y RS 7024 146
1Y RS 7024 148
1Y RS 7027 146
1Y RS 7027 148
1Y RS 7029 146
1Y RS 7029 148
2T2 12223 234
2T2 12223H 234
2T2 17223 234
2T2 17223H 234

2T2 18223 234
2T2 18223H 234
2T2 19223 234
2T2 19223H 234
2T4 12723 234
2T4 12723H 234
2T4 17723 234
2T4 17723H 234
2T4 18723 234
2T4 18723H 234
2T4 19723 234
2T4 19723H 234
2X RF7 2522 168
2X RF7 2523 168
2X RF7 2524 168
2X RF7 2527 168
2X RF7 2529 168
2X RF7 5722 168
2X RF7 5723 168
2X RF7 5724 168
2X RF7 5727 168
2X RF7 5729 168
2X RF10 2522 169
2X RF10 2523 169
2X RF10 2524 169
2X RF10 2527 169
2X RF10 2529 169
2X RF10 5722 169
2X RF10 5723 169
2X RF10 5724 169
2X RF10 5727 169
2X RF10 5729 169
2X RL 2513 171
2X RL 2513 173
2X RL 2519 171
2X RL 2519 173
2X RL 2522 171
2X RL 2522 173
2X RL 2523 171
2X RL 2523 173
2X RL 2524 171
2X RL 2524 173
2X RL 2527 171
2X RL 2527 173
2X RL 2529 171
2X RL 2529 173
2X RL 5713 171
2X RL 5713 173
2X RL 5719 171
2X RL 5719 173
2X RL 5722 171
2X RL 5722 173
2X RL 5723 171
2X RL 5723 173
2X RL 5724 171
2X RL 5724 173
2X RL 5727 171
2X RL 5727 173
2X RL 5729 171
2X RL 5729 173
2X RS 2513 170
2X RS 2513 172
2X RS 2519 170
2X RS 2519 172
2X RS 2522 170
2X RS 2522 172
2X RS 2523 170
2X RS 2523 172
2X RS 2524 170
2X RS 2524 172
2X RS 2527 170
2X RS 2527 172
2X RS 2529 170
2X RS 2529 172
2X RS 5713 170
2X RS 5713 172
2X RS 5719 170
2X RS 5719 172
2X RS 5722 170
2X RS 5722 172
2X RS 5723 170
2X RS 5723 172
2X RS 5724 170
2X RS 5724 172
2X RS 5727 170
2X RS 5727 172
2X RS 5729 170
2X RS 5729 172
2Y RF7 2222 150
2Y RF7 2223 150
2Y RF7 2224 150
2Y RF7 2227 150
2Y RF7 2229 150
2Y RF7 2522 150
2Y RF7 2523 150
2Y RF7 2524 150
2Y RF7 2527 150
2Y RF7 2529 150
2Y RF7 5522 150
2Y RF7 5523 150
2Y RF7 5524 150
2Y RF7 5527 150
2Y RF7 5529 150
2Y RF7 7722 150
2Y RF7 7723 150
2Y RF7 7724 150
2Y RF7 7727 150
2Y RF7 7729 150
2Y RF10 2222 151
2Y RF10 2223 151
2Y RF10 2224 151
2Y RF10 2227 151
2Y RF10 2229 151
2Y RF10 2522 151
2Y RF10 2523 151
2Y RF10 2524 151
2Y RF10 2527 151
2Y RF10 2529 151
2Y RF10 5522 151
2Y RF10 5523 151
2Y RF10 5524 151
2Y RF10 5527 151
2Y RF10 5529 151
2Y RF10 5722 170
2Y RF10 5723 172
2Y RF10 5724 170
2Y RF10 5727 172
2Y RF10 5729 170
2Y RF10 7722 172
2Y RF10 7723 170
2Y RF10 7724 172
2Y RF10 7727 170
2Y RF10 7729 172
2Y RL 2213 170
2Y RL 2213 172
2Y RL 2219 170
2Y RL 2219 172
2Y RL 2222 170
2Y RL 2222 172
2Y RL 2223 170
2Y RL 2223 172
2Y RL 2224 170
2Y RL 2224 172
2Y RL 2227 170
2Y RL 2227 172
2Y RL 2229 170
2Y RL 2229 172
2Y RL 2513 150
2Y RL 2513 150
2Y RL 2519 150
2Y RL 2519 150
2Y RL 2522 150
2Y RL 2522 150
2Y RL 2523 150
2Y RL 2523 150
2Y RL 2524 150
2Y RL 2524 150
2Y RL 2527 150
2Y RL 2527 150
2Y RL 2529 150
2Y RL 2529 150
2Y RL 5513 150
2Y RL 5513 150
2Y RL 5519 150
2Y RL 5519 150
2Y RL 5522 150
2Y RL 5522 150
2Y RL 5523 150
2Y RL 5523 150
2Y RL 5524 150
2Y RL 5524 150
2Y RL 5527 150
2Y RL 5527 151
2Y RL 5529 151
2Y RL 5529 151
2Y RL 5713 151
2Y RL 5713 151
2Y RL 5719 151
2Y RL 5719 151
2Y RL 5722 151
2Y RL 5722 151
2Y RL 5723 151
2Y RL 5723 151
2Y RL 5724 151
2Y RL 5724 151
2Y RL 5727 151
2Y RL 5727 151
2Y RL 5729 151
2Y RL 5729 151
2Y RL 7713 151
2Y RL 7713 151
2Y RL 7719 151
2Y RL 7719 151
2Y RL 7722 151
2Y RL 7722 151
2Y RL 7723 151
2Y RL 7723 151
2Y RL 7724 153
2Y RL 7724 155
2Y RL 7727 153
2Y RL 7727 155
2Y RL 7729 153
2Y RL 7729 155
2Y RS 2213 153
2Y RS 2213 155
2Y RS 2219 153
2Y RS 2219 155
2Y RS 2222 153
2Y RS 2222 155
2Y RS 2223 153
2Y RS 2223 155
2Y RS 2224 153
2Y RS 2224 155
2Y RS 2227 153
2Y RS 2227 155
2Y RS 2229 153
2Y RS 2229 155
2Y RS 2513 153
2Y RS 2513 155
2Y RS 2519 153
2Y RS 2519 155
2Y RS 2522 153
2Y RS 2522 155
2Y RS 2523 153
2Y RS 2523 155
2Y RS 2524 153
2Y RS 2524 155
2Y RS 2527 153
2Y RS 2527 155
2Y RS 2529 153
2Y RS 2529 155
2Y RS 5513 153
2Y RS 5513 155
2Y RS 5519 153
2Y RS 5519 155
2Y RS 5522 153
2Y RS 5522 155
2Y RS 5523 153
2Y RS 5523 155
2Y RS 5524 153
2Y RS 5524 155
2Y RS 5527 153
2Y RS 5527 155
2Y RS 5529 153
2Y RS 5529 155
2Y RS 5713 153
2Y RS 5713 155
2Y RS 5719 153
2Y RS 5719 155
2Y RS 5722 153
2Y RS 5722 155
2Y RS 5723 153
2Y RS 5723 155
2Y RS 5724 153
2Y RS 5724 155
2Y RS 5727 153
2Y RS 5727 155
2Y RS 5729 153
2Y RS 5729 155
2Y RS 7713 153
2Y RS 7713 155
2Y RS 7719 153
2Y RS 7719 155
2Y RS 7722 153
2Y RS 7722 155
2Y RS 7723 153
2Y RS 7723 155
2Y RS 7724 152
2Y RS 7724 154
2Y RS 7727 152
2Y RS 7727 154
2Y RS 7729 152
2Y RS 7729 154
3X RF7 25722 152
3X RF7 25723 154
3X RF7 25724 152
3X RF7 25727 154
3X RF7 25729 152
3X RF10 25722 154
3X RF10 25723 152
3X RF10 25724 154
3X RF10 25727 152
3X RF10 25729 154
3X RL 25713 152
3X RL 25713 154
3X RL 25719 152
3X RL 25719 154
3X RL 25722 152
3X RL 25722 154
3X RL 25723 152
3X RL 25723 154
3X RL 25724 152
3X RL 25724 154
3X RL 25727 152
3X RL 25727 154
3X RL 25729 152
3X RL 25729 154
3X RS 25713 152
3X RS 25713 154
3X RS 25719 152
3X RS 25719 154
3X RS 25722 152
3X RS 25722 154
3X RS 25723 152
3X RS 25723 154
3X RS 25724 152
3X RS 25724 154
3X RS 25727 152
3X RS 25727 154
3X RS 25729 152
3X RS 25729 154
3Y RF7 2227 156
3Y RF7 2527 156
3Y RF7 22522 156
3Y RF7 22523 156
3Y RF7 22524 156
3Y RF7 22529 156
3Y RF7 25522 156
3Y RF7 25523 156
3Y RF7 25524 156
3Y RF7 25529 156
3Y RF7 25722 156
3Y RF7 25723 156
3Y RF7 25724 156
3Y RF7 25727 156
3Y RF7 25729 156
3Y RF7 55722 156
3Y RF7 55723 156
3Y RF7 55727 156
3Y RF7 55729 156
3Y RF7 57722 156
3Y RF7 57723 156
3Y RF7 57724 156
3Y RF7 57727 156
3Y RF7 57729 156
3Y RF7 557524 156
3Y RF10 22522 157
3Y RF10 22523 157
3Y RF10 22524 157
3Y RF10 22527 157
3Y RF10 22529 157
3Y RF10 25522 157
3Y RF10 25523 157
3Y RF10 25524 157
3Y RF10 25527 157
3Y RF10 25529 157
3Y RF10 25722 157
3Y RF10 25723 157
3Y RF10 25724 157
3Y RF10 25727 157
3Y RF10 25729 157
3Y RF10 55722 157
3Y RF10 55723 157
3Y RF10 55727 157
3Y RF10 55729 157
3Y RF10 57722 157
3Y RF10 57723 157
3Y RF10 57724 157
3Y RF10 57727 157
3Y RF10 57729 157
3Y RF10 55724 157
3Y RL 22513 159
3Y RL 22513 161
3Y RL 22519 159
3Y RL 22519 161
3Y RL 22522 159
3Y RL 22522 161
3Y RL 22523 159
3Y RL 22523 161
3Y RL 22524 159
3Y RL 22524 161
3Y RL 22527 159
3Y RL 22527 161
3Y RL 22529 159
3Y RL 22529 161
3Y RL 25513 159
3Y RL 25513 161
3Y RL 25519 159
3Y RL 25519 161

3Y RL 25522 159
3Y RL 25522 161
3Y RL 25523 159
3Y RL 25523 161
3Y RL 25524 159
3Y RL 25524 161
3Y RL 25527 159
3Y RL 25527 161
3Y RL 25529 159
3Y RL 25529 161
3Y RL 25713 159
3Y RL 25713 161
3Y RL 25719 159
3Y RL 25719 161
3Y RL 25722 159
3Y RL 25722 161
3Y RL 25723 159
3Y RL 25723 161
3Y RL 25724 159
3Y RL 25724 161
3Y RL 25727 159
3Y RL 25727 161
3Y RL 25729 159
3Y RL 25729 161
3Y RL 55719 159
3Y RL 55719 161
3Y RL 55722 159
3Y RL 55722 161
3Y RL 55723 159
3Y RL 55723 161
3Y RL 55724 159
3Y RL 55724 161
3Y RL 55727 159
3Y RL 55727 161
3Y RL 55729 159
3Y RL 55729 161
3Y RL 57719 159
3Y RL 57719 161
3Y RL 57722 159
3Y RL 57722 161
3Y RL 57723 159
3Y RL 57723 161
3Y RL 57724 159
3Y RL 57724 161
3Y RL 57727 159
3Y RL 57727 161
3Y RL 57729 159
3Y RL 57729 161
3Y RL 557213 159
3Y RL 557213 161
3Y RL 577213 159
3Y RL 577213 161
3Y RS 22513 158
3Y RS 22513 160
3Y RS 22519 158
3Y RS 22519 160
3Y RS 22522 158
3Y RS 22522 160
3Y RS 22523 158
3Y RS 22523 160
3Y RS 22524 158
3Y RS 22524 160
3Y RS 22527 158
3Y RS 22527 160
3Y RS 22529 158
3Y RS 22529 160
3Y RS 25519 158
3Y RS 25519 160
3Y RS 25523 158
3Y RS 25523 160
3Y RS 25524 158
3Y RS 25524 160
3Y RS 25527 158
3Y RS 25527 160
3Y RS 25529 158
3Y RS 25529 160
3Y RS 25713 158
3Y RS 25713 160
3Y RS 25719 158
3Y RS 25719 160
3Y RS 25722 158
3Y RS 25722 160
3Y RS 25723 158
3Y RS 25723 160
3Y RS 25724 158
3Y RS 25724 158
3Y RS 25724 158
3Y RS 25724 160
3Y RS 25724 160
3Y RS 25727 158
3Y RS 25727 158
3Y RS 25727 158
3Y RS 25727 160
3Y RS 25727 160
3Y RS 25729 158
3Y RS 25729 158
3Y RS 25729 158
3Y RS 25729 160
3Y RS 25729 160
3Y RS 55723 158
3Y RS 55723 160
3Y RS 57723 158
3Y RS 57723 160
3Y RS 255213 158
3Y RS 255213 160
3Y RS 255222 158
3Y RS 255222 160
3Y RS 557213 158
3Y RS 557213 160
3Y RS 557222 158
3Y RS 557222 160
3Y RS 577213 158
3Y RS 577213 160
3Y RS 577222 158
3Y RS 577222 160
7ELEM 6724 53
21AC 3200 73
21AC 3203 74
21IN 3201 73
21IN 3241 73
21IN 3261 73
21IN 3271 158
21IN 4201 160
21IN 4241 158
21IN 4261 160
21IN 4271 158
21SO 3201 160
21SO 3241 158
21SO 3251 160
21SO 3271 158
21SO L3202 160
21SO L3214 158
21SO L3242 160
21SO L3243 158
21SO L3252 160
21SO L3253 158
21SO L3272 158
21SO L3273 158
21SO L3314 160
21SO L3343 160
21SO L3353 160
21SO L3373 158
21SO L3402 160
21SO L3404 158
21SO L3442 160
21SO L3444 158
21SO L3452 158
21SO L3454 158
21SO L3472 160
21SO L3474 160
ACAN T001 160
ACAN T002 158
ACAN T003 158
ACAN T004 158
ACAN T007 160
ACAN T009 160
ACDE 1005 160
ACDE 1005 158
ACDE 1010 158
ACDE 1010 158
ACDE 2005 160
ACDE 2005 160
ACDE 2010 160
ACDE 2010 158
ACDE 3005 160
ACDE 3005 158
ACDE 3010 160
ACDE 3010 158
ACDE 7005 160
ACDE 7005 158
ACDE 7010 160
ACDE 7010 158
ACDE 9005 160
ACDE 9005 158
ACDE 9010 160
ACDE 9010 158
ACEX 1006 160
ACEX 1006 158
ACEX 1006 160
ACEX 1006 53
ACEX 1055 73
ACEX 1055 74
ACEX 1055 73
ACEX 1055 73
ACEX 2006 73
ACEX 2006 74
ACEX 2006 74
ACEX 2055 74
ACEX 2055 74
ACEX 2055 74
ACEX 2055 74
ACEX 7006 74
ACEX 7006 74
ACEX 7006 75
ACEX 7006 75
ACEX 7055 75
ACEX 7055 75
ACEX 7055 75
ACEX 7055 75
ACIN L001 75
ACIN L002 75
ACIN L003 74
ACIN L004 74
ACIN L007 74
ACIN L009 74
ADCC 2111 75
ADCC 2111H 75
ADCC 2222 75
ADCC 2222H 75
ADCC 2333 75
ADCC 2333H 75
ADCC 2444 75
ADCC 2444H 75
ADCC 2777 47
ADCC 2777H 47
ADCC 2999 47
ADCC 2999H 47
ADCC 3111 47
ADCC 3111H 47
ADCC 3222 122
ADCC 3222H 123
ADCC 3331 72
ADCC 3333 122
ADCC 3333H 123
ADCC 3444 72
ADCC 3444H 72
ADCC 3777 122
ADCC 3777H 123
ADCC 3999 72
ADCC 3999H 72
ADCCD 2113 122
ADCCD 2113H 123
ADCCD 2223 72
ADCCD 2223H 72
ADCCD 2331 122
ADCCD 2331H 123
ADCCD 2332 72
ADCCD 2332H 72
ADCCD 3113 215
ADCCD 3113H 216
ADCCD 3223 231
ADCCD 3223H 231
ADCCD 3331H 214
ADCCD 3332 214
ADCCD 3332H 229
ADCC R6 2111 230
ADCC R6 2111H 215
ADCC R6 2113 216
ADCC R6 2113H 231
ADCC R6 2222 231
ADCC R6 2222H 214
ADCC R6 2223 214
ADCC R6 2223H 229
ADCC R6 2331 230
ADCC R6 2331H 215
ADCC R6 2332 216
ADCC R6 2332H 231
ADCC R6 2333 231
ADCC R6 2333H 214
ADCC R6 2444 214
ADCC R6 2444H 229
ADCC R6 2777 230
ADCC R6 2777H 46
ADCC R6 2999 46
ADCC R6 2999H 46
ADCC R6 3111 46
ADCC R6 3111H 46
ADCC R6 3113 46
ADCC R6 3113H 20
ADCC R6 3222 20
ADCC R6 3222H 20
ADCC R6 3223 20
ADCC R6 3223H 20
ADCC R6 3331 20
ADCC R6 3331H 20
ADCC R6 3332 20
ADCC R6 3332H 20
ADCC R6 3333 20
ADCC R6 3333H 20
ADCC R6 3444 20
ADCC R6 3444H 20
ADCC R6 3777 20
ADCC R6 3777H 20
ADCC R6 3999 20
ADCC R6 3999H 28
ADCD 21111 20
ADCD 21111H 20
ADCD 21113 20
ADCD 21113H 20
ADCD 21311 20
ADCD 21311H 20
ADCD 21331 20
ADCD 21331H 20
ADCD 22222 28
ADCD 22222H 28
ADCD 22223 28
ADCD 22223H 28
ADCD 22322 28
ADCD 22322H 28
ADCD 22332 28
ADCD 22332H 28
ADCD 23331 28
ADCD 23331H 28
ADCD 23332 28
ADCD 23332H 28
ADCD 23333 28
ADCD 23333H 28
ADCD 24444 28
ADCD 24444H 28
ADCD 27777 28
ADCD 27777H 28
ADCD 29999 35
ADCD 29999H 27
ADCD 31111 27
ADCD 31111H 35
ADCD 31113 35
ADCD 31113H 35
ADCD 31311 35
ADCD 31311H 35
ADCD 31331 35
ADCD 31331H 27
ADCD 32222 27
ADCD 32222H 27
ADCD 32223 27
ADCD 32223H 27
ADCD 32322 27
ADCD 32322H 27
ADCD 32332 27
ADCD 32332H 27
ADCD 33331 27
ADCD 33331H 35
ADCD 33332 35
ADCD 33332H 27
ADCD 33333 27
ADCD 33333H 35
ADCD 34444 35
ADCD 34444H 35
ADCD 37777 35
ADCD 37777H 35
ADCD 39999 35
ADCD 39999H 27
ADCI 21111 27
ADCI 21111H 27
ADCI 21113 27
ADCI 21113H 27
ADCI 21311 27
ADCI 21311H 27
ADCI 21331 27
ADCI 21331H 26
ADCI 22222 26
ADCI 22222H 34
ADCI 22223 34
ADCI 22223H 40
ADCI 22322 40
ADCI 22322H 34
ADCI 22332 34
ADCI 22332H 26
ADCI 23331 26
ADCI 23331H 34
ADCI 23332 34
ADCI 23332H 26
ADCI 23333 26
ADCI 23333H 26
ADCI 24444 26
ADCI 24444H 26
ADCI 27777 26
ADCI 27777H 26
ADCI 29999 26
ADCI 29999H 26
ADCI 31111 26
ADCI 31111H 26
ADCI 31113 26
ADCI 31113H 26
ADCI 31311 26
ADCI 31311H 26
ADCI 31331 26

ADCI 31331H 33
ADCI 32222 25
ADCI 32222H 25
ADCI 32223 33
ADCI 32223H 33
ADCI 32322 39
ADCI 32322H 39
ADCI 32332 33
ADCI 32332H 33
ADCI 33331 33
ADCI 33331H 33
ADCI 33332 33
ADCI 33332H 33
ADCI 33333 25
ADCI 33333H 25
ADCI 34444 25
ADCI 34444H 25
ADCI 37777 25
ADCI 37777H 25
ADCI 39999 25
ADCI 39999H 25
ADFC 2111 20
ADFC 2111H 20
ADFC 2222 20
ADFC 2222H 20
ADFC 2333 20
ADFC 2333H 20
ADFC 2444 20
ADFC 2444H 20
ADFC 2777 20
ADFC 2777H 20
ADFC 2999 20
ADFC 2999H 20
ADFC 3111 20
ADFC 3111H 20
ADFC 3222 20
ADFC 3222H 20
ADFC 3333 20
ADFC 3333H 20
ADFC 3444 20
ADFC 3444H 20
ADFC 3777 20
ADFC 3777H 20
ADFC 3999 20
ADFC 3999H 20
ADFCD 2113 28
ADFCD 2113H 28
ADFCD 2223 28
ADFCD 2223H 28
ADFCD 2331 28
ADFCD 2331H 28
ADFCD 2332 28
ADFCD 2332H 28
ADFCD 3113 28
ADFCD 3113H 28
ADFCD 3223 28
ADFCD 3223H 28
ADFCD 3331 28
ADFCD 3331H 28
ADFCD 3332 28
ADFCD 3332H 28
ADFC R6 2111 27
ADFC R6 2111H 27
ADFC R6 2113 35
ADFC R6 2113H 35
ADFC R6 2222 27
ADFC R6 2222H 27
ADFC R6 2223 35
ADFC R6 2223H 35
ADFC R6 2331 35
ADFC R6 2331H 35
ADFC R6 2332 35
ADFC R6 2332H 35
ADFC R6 2333 27
ADFC R6 2333H 27
ADFC R6 2444 27
ADFC R6 2444H 27
ADFC R6 2777 27
ADFC R6 2777H 27
ADFC R6 2999 27
ADFC R6 2999H 27
ADFC R6 3111 27
ADFC R6 3111H 27
ADFC R6 3113 35
ADFC R6 3113H 35
ADFC R6 3222 27
ADFC R6 3222H 27
ADFC R6 3223 35
ADFC R6 3223H 35
ADFC R6 3331 35
ADFC R6 3331H 35
ADFC R6 3332 35
ADFC R6 3332H 35
ADFC R6 3333 27
ADFC R6 3333H 27
ADFC R6 3444 27
ADFC R6 3444H 27
ADFC R6 3777 27
ADFC R6 3777H 27
ADFC R6 3999 27
ADFC R6 3999H 27
ADFL 1273 10
ADFL 1273AU 10
ADFL 1273H 10
ADFL 1273HAU 10
ADFL 1273HUK 10
ADFL 1273HUS 10
ADFL 1273UK 10
ADFL 1273US 10
ADFL 1274 10
ADFL 1274AU 10
ADFL 1274H 10
ADFL 1274HAU 10
ADFL 1274HUK 10
ADFL 1274HUS 10
ADFL 1274UK 10
ADFL 1274US 10
ADFL 1277 10
ADFL 1277AU 10
ADFL 1277H 10
ADFL 1277HAU 10
ADFL 1277HUK 10
ADFL 1277HUS 10
ADFL 1277UK 10
ADFL 1277US 10
ADFL 1279 10
ADFL 1279AU 10
ADFL 1279H 10
ADFL 1279HAU 10
ADFL 1279HUK 10
ADFL 1279HUS 10
ADFL 1279UK 10
ADFL 1279US 10
ADFL 1303 10
ADFL 1303AU 10
ADFL 1303H 10
ADFL 1303HAU 10
ADFL 1303HUK 10
ADFL 1303HUS 10
ADFL 1303UK 10
ADFL 1303US 10
ADFL 1304 10
ADFL 1304AU 10
ADFL 1304H 10
ADFL 1304HAU 10
ADFL 1304HUK 10
ADFL 1304HUS 10
ADFL 1304UK 10
ADFL 1304US 10
ADFL 1307 10
ADFL 1307AU 10
ADFL 1307H 10
ADFL 1307HAU 10
ADFL 1307HUK 10
ADFL 1307HUS 10
ADFL 1307UK 10
ADFL 1307US 10
ADFL 1309 10
ADFL 1309AU 10
ADFL 1309H 10
ADFL 1309HAU 10
ADFL 1309HUK 10
ADFL 1309HUS 10
ADFL 1309UK 10
ADFL 1309US 10
ADRT 121111 21
ADRT 121111H 21
ADRT 121113 29
ADRT 121113H 29
ADRT 121311 36
ADRT 121311H 36
ADRT 121331 29
ADRT 121331H 29
ADRT 122222 21
ADRT 122222H 21
ADRT 122223 29
ADRT 122223H 29
ADRT 122322 36
ADRT 122322H 36
ADRT 122332 29
ADRT 122332H 29
ADRT 123331 29
ADRT 123331H 29
ADRT 123332 29
ADRT 123332H 29
ADRT 123333 21
ADRT 123333H 21
ADRT 124444 21
ADRT 124444H 21
ADRT 127777 21
ADRT 127777H 21
ADRT 129999 21
ADRT 129999H 21
ADRT 131111 21
ADRT 131111H 21
ADRT 131113 29
ADRT 131113H 29
ADRT 131311 36
ADRT 131311H 36
ADRT 131331 29
ADRT 131331H 29
ADRT 132222 21
ADRT 132222H 21
ADRT 132223 29
ADRT 132223H 29
ADRT 132322 36
ADRT 132322H 36
ADRT 132332 29
ADRT 132332H 29
ADRT 133331 29
ADRT 133331H 29
ADRT 133332 29
ADRT 133332H 29
ADRT 133333 21
ADRT 133333H 21
ADRT 134444 21
ADRT 134444H 21
ADRT 137777 21
ADRT 137777H 21
ADRT 139999 21
ADRT 139999H 21
ADRT 221111 22
ADRT 221111H 22
ADRT 221113 30
ADRT 221113H 30
ADRT 221311 37
ADRT 221311H 37
ADRT 221331 30
ADRT 221331H 30
ADRT 222222 22
ADRT 222222H 22
ADRT 222223 30
ADRT 222223H 30
ADRT 222322 37
ADRT 222322H 37
ADRT 222332 30
ADRT 222332H 30
ADRT 223331 30
ADRT 223331H 30
ADRT 223332 30
ADRT 223332H 30
ADRT 223333 22
ADRT 223333H 22
ADRT 224444 22
ADRT 224444H 22
ADRT 227777 22
ADRT 227777H 22
ADRT 229999 22
ADRT 229999H 22
ADRT 231111 22
ADRT 231111H 22
ADRT 231113 30
ADRT 231113H 30
ADRT 231311 37
ADRT 231311H 37
ADRT 231331 30
ADRT 231331H 30
ADRT 232222 22
ADRT 232222H 22
ADRT 232223 30
ADRT 232223H 30
ADRT 232322 37
ADRT 232322H 37
ADRT 232332 30
ADRT 232332H 30
ADRT 233331 30
ADRT 233331H 30
ADRT 233332 30
ADRT 233332H 30
ADRT 233333 22
ADRT 233333H 22
ADRT 234444 22
ADRT 234444H 22
ADRT 237777 22
ADRT 237777H 22
ADRT 239999 22
ADRT 239999H 22
ADSD 321311 38
ADSD 321311H 38
ADSD 321331 31
ADSD 321331H 31
ADSD 321333 23
ADSD 321333H 23
ADSD 322322 38
ADSD 322322H 38
ADSD 322332 31
ADSD 322332H 31
ADSD 322333 23
ADSD 322333H 23
ADSD 331311 38
ADSD 331311H 38
ADSD 331331 31
ADSD 331331H 31
ADSD 331333 23
ADSD 331333H 23
ADSD 332322 38
ADSD 332322H 38
ADSD 332332 31
ADSD 332332H 31
ADSD 332333 23
ADSD 332333H 23
ADSD 421311 38
ADSD 421311H 38
ADSD 421331 32
ADSD 421331H 32
ADSD 421333 24
ADSD 421333H 24
ADSD 422322 38
ADSD 422322H 38
ADSD 422332 32
ADSD 422332H 32
ADSD 422333 24
ADSD 422333H 24
ADSD 431311 38
ADSD 431311H 38
ADSD 431331 32
ADSD 431331H 32
ADSD 431333 24
ADSD 431333H 24
ADSD 432322 38
ADSD 432322H 38
ADSD 432332 32
ADSD 432332H 32
ADSD 432333 24
ADSD 432333H 24
ADST 121111 21
ADST 121111H 21
ADST 121113 29
ADST 121113H 29
ADST 121311 36
ADST 121311H 36
ADST 121331 29
ADST 121331H 29
ADST 121333 21
ADST 121333H 21
ADST 122222 21
ADST 122222H 21
ADST 122223 29
ADST 122223H 29
ADST 122322 36
ADST 122322H 36
ADST 122332 29
ADST 122332H 29
ADST 122333 21
ADST 122333H 21
ADST 131111 21
ADST 131111H 21
ADST 131113 29
ADST 131113H 29
ADST 131311 36
ADST 131311H 36
ADST 131331 29
ADST 131331H 29
ADST 131333 21
ADST 131333H 21
ADST 132222 21
ADST 132222H 21
ADST 132223 29
ADST 132223H 29
ADST 132322 36
ADST 132322H 36
ADST 132332 29
ADST 132332H 29
ADST 132333 21
ADST 132333H 21
ADST 221111 22
ADST 221111H 22
ADST 221113 30
ADST 221113H 30
ADST 221311 37
ADST 221311H 37
ADST 221331 30
ADST 221331H 30
ADST 221333 22
ADST 221333H 22
ADST 222222 22
ADST 222222H 22
ADST 222223 30
ADST 222223H 30
ADST 222322 37
ADST 222322H 37
ADST 222332 30
ADST 222332H 30
ADST 222333 22

ADST 222333H 22
ADST 231111 22
ADST 231111H 22
ADST 231113 30
ADST 231113H 30
ADST 231311 37
ADST 231311H 37
ADST 231331 30
ADST 231331H 30
ADST 231333 22
ADST 231333H 22
ADST 232222 22
ADST 232222H 22
ADST 232223 30
ADST 232223H 30
ADST 232322 37
ADST 232322H 37
ADST 232332 30
ADST 232332H 30
ADST 232333 22
ADST 232333H 22
ADST 321111 23
ADSD 321111 23
ADST 321111H 23
ADSD 321111H 23
ADST 321113 23
ADSD 321113 31
ADST 321113H 31
ADSD 321113H 31
ADST 321311 38
ADST 321311H 38
ADST 321331 31
ADST 321331H 31
ADST 321333 23
ADST 321333H 23
ADST 322222 23
ADSD 322222 23
ADST 322222H 23
ADSD 322222H 23
ADST 322223 23
ADSD 322223 31
ADST 322223H 31
ADSD 322223H 31
ADST 322322 38
ADST 322322H 38
ADST 322332 31
ADST 322332H 31
ADST 322333 23
ADST 322333H 23
ADST 331111 23
ADSD 331111 23
ADST 331111H 23
ADSD 331111H 23
ADST 331113 23
ADSD 331113 31
ADST 331113H 31
ADSD 331113H 31
ADST 331311 38
ADST 331311H 38
ADST 331331 31
ADST 331331H 31
ADST 331333 23
ADST 331333H 23
ADST 332222 23
ADSD 332222 23
ADST 332222H 23
ADSD 332222H 23
ADST 332223 23
ADSD 332223 31
ADST 332223H 31
ADSD 332223H 31
ADST 332322 38
ADST 332322H 38
ADST 332332 31
ADST 332332H 31
ADST 332333 23
ADST 332333H 23
ADST 421111 24
ADSD 421111 24
ADST 421111H 24
ADSD 421111H 24
ADST 421113 24
ADSD 421113 32
ADST 421113H 32
ADSD 431113H 32
ADST 421311 38
ADST 421311H 38
ADST 421331 32
ADST 421331H 32
ADST 421333 24
ADST 421333H 24
ADST 422222 24
ADSD 422222 24
ADST 422222H 24
ADSD 422222H 24
ADST 422223 24
ADSD 422223 32
ADST 422223H 32
ADSD 422223H 32
ADST 422322 38
ADST 422322H 38
ADST 422332 32
ADST 422332H 32
ADST 422333 24
ADST 422333H 24
ADST 431111 24
ADSD 431111 24
ADST 431111H 24
ADSD 431111H 24
ADST 431113 24
ADSD 431113 32
ADST 431113H 32
ADSD 431113H 32
ADST 431311 38
ADST 431311H 38
ADST 431331 32
ADST 431331H 32
ADST 431333 24
ADST 431333H 24
ADST 432222 24
ADSD 432222 24
ADST 432222H 24
ADSD 432222H 24
ADST 432222H 24
ADSD 432222H 32
ADST 432223 32
ADSD 432223 32
ADST 432322 38
ADST 432322H 38
ADST 432332 32
ADST 432332H 32
ADST 432333 24
ADST 432333H 24
ADTA 1272 11
ADTA 1272AU 11
ADTA 1272H 11
ADTA 1272HAU 11
ADTA 1272HUK 11
ADTA 1272HUS 11
ADTA 1272UK 11
ADTA 1272US 11
ADTA 1273 11
ADTA 1273AU 11
ADTA 1273H 11
ADTA 1273HAU 11
ADTA 1273HUK 11
ADTA 1273HUS 11
ADTA 1273UK 11
ADTA 1273US 11
ADTA 1274 11
ADTA 1274AU 11
ADTA 1274H 11
ADTA 1274HAU 11
ADTA 1274HUK 11
ADTA 1274HUS 11
ADTA 1274UK 11
ADTA 1274US 11
ADTA 1277 11
ADTA 1277AU 11
ADTA 1277H 11
ADTA 1277HAU 11
ADTA 1277HUK 11
ADTA 1277HUS 11
ADTA 1277UK 11
ADTA 1277US 11
ADTA 1279 11
ADTA 1279AU 11
ADTA 1279H 11
ADTA 1279HAU 11
ADTA 1279HUK 11
ADTA 1279HUS 11
ADTA 1279UK 11
ADTA 1279US 11
ADTA 1302 11
ADTA 1302AU 11
ADTA 1302H 11
ADTA 1302HAU 11
ADTA 1302HUK 11
ADTA 1302HUS 11
ADTA 1302UK 11
ADTA 1302US 11
ADTA 1303 11
ADTA 1303AU 11
ADTA 1303H 11
ADTA 1303HAU 11
ADTA 1303HUK 11
ADTA 1303HUS 11
ADTA 1303UK 11
ADTA 1303US 11
ADTA 1304 11
ADTA 1304AU 11
ADTA 1304H 11
ADTA 1304HAU 11
ADTA 1304HUK 11
ADTA 1304HUS 11
ADTA 1304UK 11
ADTA 1304US 11
ADTA 1307 11
ADTA 1307AU 11
ADTA 1307H 11
ADTA 1307HAU 11
ADTA 1307HUK 11
ADTA 1307HUS 11
ADTA 1307UK 11
ADTA 1307US 11
ADTA 1309 11
ADTA 1309AU 11
ADTA 1309H 11
ADTA 1309HAU 11
ADTA 1309HUK 11
ADTA 1309HUS 11
ADTA 1309UK 11
ADTA 1309US 11
ADTR 2111 235
ADTR 2111H 235
ADTR 2222 235
ADTR 2222H 235
ADTR 2333 235
ADTR 2333H 235
ADTR 2444 235
ADTR 2444H 235
ADTR 2777 235
ADTR 2777H 235
ADTR 2999 235
ADTR 2999H 235
ADTR 3111 235
ADTR 3111H 235
ADTR 3222 235
ADTR 3222H 235
ADTR 3333 235
ADTR 3333H 235
ADTR 3444 235
ADTR 3444H 235
ADTR 3777 235
ADTR 3777H 235
ADTR 3999 235
ADTR 3999H 235
ADTRD 2113 236
ADTRD 2113H 236
ADTRD 2131 237
ADTRD 2131H 237
ADTRD 2223 236
ADTRD 2223H 236
ADTRD 2232 237
ADTRD 2232H 237
ADTRD 2331 236
ADTRD 2331H 236
ADTRD 2332 236
ADTRD 2332H 236
ADTRD 3113 236
ADTRD 3113H 236
ADTRD 3131 237
ADTRD 3131H 237
ADTRD 3223 236
ADTRD 3223H 236
ADTRD 3232 237
ADTRD 3232H 237
ADTRD 3331 236
ADTRD 3331H 236
ADTRD 3332 236
ADTRD 3332H 236
ADTW 2111 235
ADTW 2111H 235
ADTW 2333 235
ADTW 2333H 235
ADTW 3111 235
ADTW 3111H 235
ADTW 3333 235
ADTW 3333H 235
ADTWD 2113 236
ADTWD 2113H 236
ADTWD 2131 237
ADTWD 2131H 237
ADTWD 2331 236
ADTWD 2331H 236
ADTWD 3113 236
ADTWD 3113H 236
ADTWD 3131 237
ADTWD 3131H 237
ADTWD 3331 236
ADTWD 3331H 236
ADWL 1273 101
ADWL 1273AU 102
ADWL 1273EU 102
ADWL 1273H 101
ADWL 1273HAU 102
ADWL 1273HEU 102
ADWL 1273HUK 102
ADWL 1273HUS 102
ADWL 1273UK 102
ADWL 1273US 102
ADWL 1274 101
ADWL 1274AU 102
ADWL 1274EU 102
ADWL 1274H 101
ADWL 1274HAU 102
ADWL 1274HEU 102
ADWL 1274HUK 102
ADWL 1274HUS 102
ADWL 1274UK 102
ADWL 1274US 102
ADWL 1277 101
ADWL 1277AU 102
ADWL 1277EU 102
ADWL 1277H 101
ADWL 1277HAU 102
ADWL 1277HEU 102
ADWL 1277HUK 102
ADWL 1277HUS 102
ADWL 1277UK 102
ADWL 1277US 102
ADWL 1279 101
ADWL 1279AU 102
ADWL 1279EU 102
ADWL 1279H 101
ADWL 1279HAU 102
ADWL 1279HEU 102
ADWL 1279HUK 102
ADWL 1279HUS 102
ADWL 1279UK 102
ADWL 1279US 102
ADWL 1303 101
ADWL 1303AU 102
ADWL 1303EU 102
ADWL 1303H 101
ADWL 1303HAU 102
ADWL 1303HEU 102
ADWL 1303HUK 102
ADWL 1303HUS 102
ADWL 1303UK 102
ADWL 1303US 102
ADWL 1304 101
ADWL 1304AU 102
ADWL 1304EU 102
ADWL 1304H 101
ADWL 1304HAU 102
ADWL 1304HEU 102
ADWL 1304HUK 102
ADWL 1304HUS 102
ADWL 1304UK 102
ADWL 1304US 102
ADWL 1307 101
ADWL 1307AU 102
ADWL 1307EU 102
ADWL 1307H 101
ADWL 1307HAU 102
ADWL 1307HEU 102
ADWL 1307HUK 102
ADWL 1307HUS 102
ADWL 1307UK 102
ADWL 1307US 102
ADWL 1309 101
ADWL 1309AU 102
ADWL 1309EU 102
ADWL 1309H 101
ADWL 1309HAU 102
ADWL 1309HEU 102
ADWL 1309HUK 102
ADWL 1309HUS 102
ADWL 1309UK 102
ADWL 1309US 102
AFDA 31171 180
AFDA 31172 180
AFDA 31173 180
AFDA 31174 180
AFDA 31177 180
AFDA 31179 180
AFDA 31191 180
AFDA 31192 180
AFDA 31193 180
AFDA 31194 180
AFDA 31197 180
AFDA 31199 180
AFDA 31271 180
AFDA 31272 180
AFDA 31273 180
AFDA 31274 180
AFDA 31277 180
AFDA 31279 180
AFDA 31291 180
AFDA 31292 180
AFDA 31293 180
AFDA 31294 180
AFDA 31297 180

AFDA 31299 180
AFDA 52171 181
AFDA 52172 181
AFDA 52173 181
AFDA 52174 181
AFDA 52177 181
AFDA 52179 181
AFDA 52191 181
AFDA 52192 181
AFDA 52193 181
AFDA 52194 181
AFDA 52197 181
AFDA 52199 181
AFDA 52271 181
AFDA 52272 181
AFDA 52273 181
AFDA 52274 181
AFDA 52277 181
AFDA 52279 181
AFDA 52291 181
AFDA 52292 181
AFDA 52293 181
AFDA 52294 181
AFDA 52297 181
AFDA 52299 181
AFLC 31171 180
AFLC 31172 180
AFLC 31173 180
AFLC 31174 180
AFLC 31177 180
AFLC 31179 180
AFLC 31191 180
AFLC 31192 180
AFLC 31193 180
AFLC 31194 180
AFLC 31197 180
AFLC 31199 180
AFLC 31271 180
AFLC 31272 180
AFLC 31273 180
AFLC 31274 180
AFLC 31277 180
AFLC 31279 180
AFLC 31291 180
AFLC 31292 180
AFLC 31293 180
AFLC 31294 180
AFLC 31297 180
AFLC 31299 180
AFLC 52171 181
AFLC 52172 181
AFLC 52173 181
AFLC 52174 181
AFLC 52177 181
AFLC 52179 181
AFLC 52191 181
AFLC 52192 181
AFLC 52193 181
AFLC 52194 181
AFLC 52197 181
AFLC 52199 181
AFLC 52271 181
AFLC 52272 181
AFLC 52273 181
AFLC 52274 181
AFLC 52277 181
AFLC 52279 181
AFLC 52291 181
AFLC 52292 181
AFLC 52293 181
AFLC 52294 181
AFLC 52297 181
AFLC 52299 181
AFPU 31171 180
AFPU 31172 180
AFPU 31173 180
AFPU 31174 180
AFPU 31177 180
AFPU 31179 180
AFPU 31191 180
AFPU 31192 180
AFPU 31193 180
AFPU 31194 180
AFPU 31197 180
AFPU 31199 180
AFPU 31271 180
AFPU 31272 180
AFPU 31273 180
AFPU 31274 180
AFPU 31277 180
AFPU 31279 180
AFPU 31291 180
AFPU 31292 180
AFPU 31293 180
AFPU 31294 180
AFPU 31297 180
AFPU 31299 180
AFPU 52171 181
AFPU 52172 181
AFPU 52173 181
AFPU 52174 181
AFPU 52177 181
AFPU 52179 181
AFPU 52191 181
AFPU 52192 181
AFPU 52193 181
AFPU 52194 181
AFPU 52197 181
AFPU 52199 181
AFPU 52271 181
AFPU 52272 181
AFPU 52273 181
AFPU 52274 181
AFPU 52277 181
AFPU 52279 181
AFPU 52291 181
AFPU 52292 181
AFPU 52293 181
AFPU 52294 181
AFPU 52297 181
AFPU 52299 181
ALDA 31111 182
ALDA 31112 182
ALDA 31113 182
ALDA 31114 182
ALDA 31117 182
ALDA 31119 182
ALDA 31211 182
ALDA 31212 182
ALDA 31213 182
ALDA 31214 182
ALDA 31217 182
ALDA 31219 182
ALDA 52111 182
ALDA 52112 182
ALDA 52113 182
ALDA 52114 182
ALDA 52117 180
ALDA 52119 180
ALDA 52211 180
ALDA 52212 180
ALDA 52213 180
ALDA 52214 180
ALDA 52217 180
ALDA 52219 180
ALLC 31111 180
ALLC 31112 180
ALLC 31113 180
ALLC 31114 180
ALLC 31117 180
ALLC 31119 180
ALLC 31211 180
ALLC 31212 180
ALLC 31213 180
ALLC 31214 180
ALLC 31217 180
ALLC 31219 180
ALLC 52111 180
ALLC 52112 180
ALLC 52113 180
ALLC 52114 180
ALLC 52117 181
ALLC 52119 181
ALLC 52211 181
ALLC 52212 181
ALLC 52213 181
ALLC 52214 181
ALLC 52217 181
ALLC 52219 181
ALPU 31111 181
ALPU 31112 181
ALPU 31113 181
ALPU 31114 181
ALPU 31117 181
ALPU 31119 181
ALPU 31211 181
ALPU 31212 181
ALPU 31213 181
ALPU 31214 181
ALPU 31217 181
ALPU 31219 181
ALPU 52111 181
ALPU 52112 181
ALPU 52113 181
ALPU 52114 181
ALPU 52117 182
ALPU 52119 182
ALPU 52211 182
ALPU 52212 182
ALPU 52213 182
ALPU 52214 182
ALPU 52217 182
ALPU 52219 182
ARIN 0111 92
ARIN 0112 92
ARIN 0119 92
ARIN 0121 92
ARIN 0122 92
ARIN 0129 92
ARIN 0191 92
ARIN 0192 92
ARIN 0199 92
ARIN 0211 92
ARIN 0212 92
ARIN 0219 92
ARIN 0221 92
ARIN 0222 92
ARIN 0229 92
ARIN 0291 92
ARIN 0292 92
ARIN 0299 92
ARIN 1111 94
ARIN 1112 94
ARIN 1119 94
ARIN 1121 94
ARIN 1122 94
ARIN 1129 94
ARIN 1191 94
ARIN 1192 94
ARIN 1199 94
ARIN 1211 94
ARIN 1212 94
ARIN 1219 94
ARIN 1221 94
ARIN 1222 94
ARIN 1229 94
ARIN 1291 94
ARIN 1292 94
ARIN 1299 94
ARIN 2111 81
ARIN 2112 81
ARIN 2119 81
ARIN 2121 81
ARIN 2122 81
ARIN 2129 81
ARIN 2191 81
ARIN 2192 81
ARIN 2199 81
ARIN 2211 81
ARIN 2212 81
ARIN 2219 81
ARIN 2221 81
ARIN 2222 81
ARIN 2229 81
ARIN 2291 81
ARIN 2292 81
ARIN 2299 81
ARIN 7111 91
ARIN 7112 91
ARIN 7119 91
ARIN 7121 91
ARIN 7122 91
ARIN 7129 91
ARIN 7191 91
ARIN 7192 91
ARIN 7199 91
ARIN 7211 91
ARIN 7212 91
ARIN 7219 91
ARIN 7221 91
ARIN 7222 91
ARIN 7229 91
ARIN 7291 91
ARIN 7292 91
ARIN 7299 91
ARRI 0121 93
ARRI 0122 93
ARRI 0129 93
ARRI 0221 93
ARRI 0222 93
ARRI 0229 93
ARRI 1121 94
ARRI 1122 94
ARRI 1129 94
ARRI 1221 94
ARRI 1222 94
ARRI 1229 94
ARRI 2121 94
ARRI 2122 94
ARRI 2129 94
ARRI 2221 94
ARRI 2222 94
ARRI 2229 94
ARRI 7121 94
ARRI 7122 94
ARRI 7129 94
ARRI 7221 94
ARRI 7222 94
ARRI 7229 94
ARUP 2111 82
ARUP 2112 82
ARUP 2119 82
ARUP 2121 82
ARUP 2122 82
ARUP 2129 82
ARUP 2211 82
ARUP 2212 82
ARUP 2219 82
ARUP 2221 82
ARUP 2222 82
ARUP 2229 82
ARUP 7111 92
ARUP 7112 92
ARUP 7119 92
ARUP 7121 92
ARUP 7122 92
ARUP 7129 92
ARUP 7211 92
ARUP 7212 92
ARUP 7219 92
ARUP 7221 92
ARUP 7222 92
ARUP 7229 92
ARUP L0111 93
ARUP L0112 93
ARUP L0119 93
ARUP L0121 93
ARUP L0122 93
ARUP L0129 93
ARUP L0211 93
ARUP L0212 93
ARUP L0219 93
ARUP L0221 93
ARUP L0222 93
ARUP L0229 93
ARUP L1111 95
ARUP L1112 95
ARUP L1119 95
ARUP L1121 95
ARUP L1122 95
ARUP L1129 95
ARUP L1211 95
ARUP L1212 95
ARUP L1219 95
ARUP L1221 95
ARUP L1222 95
ARUP L1229 95
ATWD 2213 114
ATWD 2223 114
ATWD 2231 114
ATWD 2232 114
ATWD 2234 114
ATWD 2237 114
ATWD 2243 114
ATWD 2249 114
ATWD 2271 113
ATWD 2272 113
ATWD 2273 113
ATWD 2274 113
ATWD 2277 113
ATWD 2279 113
ATWD 2301 113
ATWD 2302 113
ATWD 2303 113
ATWD 2304 113
ATWD 2307 113
ATWD 2309 113
ATWD 2313 114
ATWD 2323 114
ATWD 2331 114
ATWD 2332 114
ATWD 2334 114
ATWD 2337 114
ATWD 2343 114
ATWD 2349 114
ATWD 2373 114
ATWD 2394 114
ATWD 2773 114
ATWD 2794 114
ATWS 1213 112
ATWS 1223 112
ATWS 1231 112
ATWS 1232 112
ATWS 1234 112
ATWS 1237 112
ATWS 1243 112
ATWS 1271 111
ATWS 1272 111
ATWS 1273 111
ATWS 1274 111
ATWS 1277 111
ATWS 1279 111
ATWS 1301 111
ATWS 1302 111

ATWS 1303 111
ATWS 1304 111
ATWS 1307 111
ATWS 1309 111
ATWS 1313 112
ATWS 1323 112
ATWS 1331 112
ATWS 1332 112
ATWS 1334 112
ATWS 1337 112
ATWS 1343 112
ATWS 1349 112
ATWS 1373 112
ATWS 1394 112
ATWS 1749 112
ATWS 1773 112
ATWS 1794 112
AUAN T001 47
AUAN T002 47
AUAN T003 47
AUAN T004 47
AUAN T007 47
AUAN T009 47
AUCA 1211 140
AUCA 1211H 140
AUCA 1222 140
AUCA 1222H 140
AUCA 1232 140
AUCA 1232H 140
AUCA 1242 140
AUCA 1242H 140
AUCA 1272 140
AUCA 1272H 140
AUCA 1292 140
AUCA 1292H 140
AUCA 1311 140
AUCA 1311H 140
AUCA 1322 140
AUCA 1322H 140
AUCA 1332 140
AUCA 1332H 140
AUCA 1342 140
AUCA 1342H 140
AUCA 1372 140
AUCA 1372H 140
AUCA 1392 140
AUCA 1392H 140
AUCBD 1211 141
AUCBD 1211H 141
AUCBD 1212 141
AUCBD 1212H 141
AUCBD 1213 141
AUCBD 1213H 141
AUCBD 1214 141
AUCBD 1214H 141
AUCBD 1217 141
AUCBD 1217H 141
AUCBD 1219 141
AUCBD 1219H 141
AUCBD 1311 141
AUCBD 1311H 141
AUCBD 1312 141
AUCBD 1312H 141
AUCBD 1313 141
AUCBD 1313H 141
AUCBD 1314 141
AUCBD 1314H 141
AUCBD 1317 141
AUCBD 1317H 141
AUCBD 1319 141
AUCBD 1319H 141
AUCC 1211 140
AUCC 1211H 140
AUCC 1222 140
AUCC 1222H 140
AUCC 1232 140
AUCC 1232H 140
AUCC 1242 140
AUCC 1242H 140
AUCC 1272 140
AUCC 1272H 140
AUCC 1292 140
AUCC 1292H 140
AUCC 1311 140
AUCC 1311H 140
AUCC 1322 140
AUCC 1322H 140
AUCC 1332 140
AUCC 1332H 140
AUCC 1342 140
AUCC 1342H 140
AUCC 1372 140
AUCC 1372H 140
AUCC 1392 140
AUCC 1392H 140
AUDEX 1271 201
AUDEX 1271 220
AUDEX 1272 201
AUDEX 1272 220
AUDEX 1273 201
AUDEX 1274 201
AUDEX 1277 201
AUDEX 1279 201
AUDEX 1301 201
AUDEX 1301 220
AUDEX 1302 201
AUDEX 1302 220
AUDEX 1303 201
AUDEX 1304 201
AUDEX 1307 201
AUDEX 1309 201
AUDY 1271 43
AUDY 1271H 43
AUDY 1272 43
AUDY 1272H 43
AUDY 1273 43
AUDY 1273H 43
AUDY 1274 43
AUDY 1274H 43
AUDY 1277 43
AUDY 1277H 43
AUDY 1279 43
AUDY 1279H 43
AUDY 1301 43
AUDY 1301H 43
AUDY 1302 43
AUDY 1302H 43
AUDY 1303 43
AUDY 1303H 43
AUDY 1304 43
AUDY 1304H 43
AUDY 1307 43
AUDY 1307H 43
AUDY 1309 43
AUDY 1309H 43
AUEXC 1271 199
AUEXC 1271 218
AUEXC 1272 199
AUEXC 1272 218
AUEXC 1273 199
AUEXC 1274 199
AUEXC 1277 199
AUEXC 1279 199
AUEXC 1301 199
AUEXC 1301 218
AUEXC 1302 199
AUEXC 1302 218
AUEXC 1303 199
AUEXC 1304 199
AUEXC 1307 199
AUEXC 1309 199
AUEXF 1271 199
AUEXF 1271 218
AUEXF 1272 199
AUEXF 1272 218
AUEXF 1273 199
AUEXF 1274 199
AUEXF 1277 199
AUEXF 1279 199
AUEXF 1301 199
AUEXF 1301 218
AUEXF 1302 199
AUEXF 1302 218
AUEXF 1303 199
AUEXF 1304 199
AUEXF 1307 199
AUEXF 1309 199
AUIC 1271 41
AUIC 1271H 41
AUIC 1272 41
AUIC 1272H 41
AUIC 1273 41
AUIC 1273H 41
AUIC 1274 41
AUIC 1274H 41
AUIC 1277 41
AUIC 1277H 41
AUIC 1279 41
AUIC 1279H 41
AUIC 1301 41
AUIC 1301H 41
AUIC 1302 41
AUIC 1302H 41
AUIC 1303 41
AUIC 1303H 41
AUIC 1304 41
AUIC 1304H 41
AUIC 1307 41
AUIC 1307H 41
AUIC 1309 41
AUIC 1309H 41
AUIF 1271 41
AUIF 1271H 41
AUIF 1272 41
AUIF 1272H 41
AUIF 1273 41
AUIF 1273H 41
AUIF 1274 41
AUIF 1274H 41
AUIF 1277 41
AUIF 1277H 41
AUIF 1279 41
AUIF 1279H 41
AUIF 1301 41
AUIF 1301H 41
AUIF 1302 41
AUIF 1302H 41
AUIF 1303 41
AUIF 1303H 41
AUIF 1304 41
AUIF 1304H 41
AUIF 1307 41
AUIF 1307H 41
AUIF 1309 41
AUIF 1309H 41
AUIN L001 46
AUIN L002 46
AUIN L003 46
AUIN L004 46
AUIN L007 46
AUIN L009 46
AUOC 1271 42
AUOC 1271H 42
AUOC 1272 42
AUOC 1272H 42
AUOC 1273 42
AUOC 1273H 42
AUOC 1274 42
AUOC 1274H 42
AUOC 1277 42
AUOC 1277H 42
AUOC 1279 42
AUOC 1279H 42
AUOC 1301 42
AUOC 1301H 42
AUOC 1302 42
AUOC 1302H 42
AUOC 1303 42
AUOC 1303H 42
AUOC 1304 42
AUOC 1304H 42
AUOC 1307 42
AUOC 1307H 42
AUOC 1309 42
AUOC 1309H 42
AUOF 1271 42
AUOF 1271H 42
AUOF 1272 42
AUOF 1272H 42
AUOF 1273 42
AUOF 1273H 42
AUOF 1274 42
AUOF 1274H 42
AUOF 1277 42
AUOF 1277H 42
AUOF 1279 42
AUOF 1279H 42
AUOF 1301 42
AUOF 1301H 42
AUOF 1302 42
AUOF 1302H 42
AUOF 1303 42
AUOF 1303H 42
AUOF 1304 42
AUOF 1304H 42
AUOF 1307 42
AUOF 1307H 42
AUOF 1309 42
AUOF 1309H 42
AUOXC 1271 200
AUOXC 1271 219
AUOXC 1272 200
AUOXC 1272 219
AUOXC 1273 200
AUOXC 1274 200
AUOXC 1277 200
AUOXC 1279 200
AUOXC 1301 200
AUOXC 1301 219
AUOXC 1302 200
AUOXC 1302 219
AUOXC 1303 200
AUOXC 1304 200
AUOXC 1307 200
AUOXC 1309 200
AUOXF 1271 200
AUOXF 1271 219
AUOXF 1272 200
AUOXF 1272 219
AUOXF 1273 200
AUOXF 1274 200
AUOXF 1277 200
AUOXF 1279 200
AUOXF 1301 200
AUOXF 1301 219
AUOXF 1302 200
AUOXF 1302 219
AUOXF 1303 200
AUOXF 1304 200
AUOXF 1307 200
AUOXF 1309 200
AURT T001 47
AURT T002 47
AURT T003 47
AURT T004 47
AURT T007 47
AURT T009 47
AURT T201 48
AURT T202 48
AURT T203 48
AURT T204 48
AURT T207 48
AURT T209 48
AUSBD 1211 139
AUSBD 1211H 139
AUSBD 1212 139
AUSBD 1212H 139
AUSBD 1213 139
AUSBD 1213H 139
AUSBD 1214 139
AUSBD 1214H 139
AUSBD 1217 139
AUSBD 1217H 139
AUSBD 1219 139
AUSBD 1219H 139
AUSBD 1311 139
AUSBD 1311H 139
AUSBD 1312 139
AUSBD 1312H 139
AUSBD 1313 139
AUSBD 1313H 139
AUSBD 1314 139
AUSBD 1314H 139
AUSBD 1317 139
AUSBD 1317H 139
AUSBD 1319 139
AUSBD 1319H 139
AUSC 1201 138
AUSC 1201H 138
AUSC 1202 138
AUSC 1202H 138
AUSC 1203 138
AUSC 1203H 138
AUSC 1204 138
AUSC 1204H 138
AUSC 1207 138
AUSC 1207H 138
AUSC 1209 138
AUSC 1209H 138
AUSC 1301 138
AUSC 1301H 138
AUSC 1302 138
AUSC 1302H 138
AUSC 1303 138
AUSC 1303H 138
AUSC 1304 138
AUSC 1304H 138
AUSC 1307 138
AUSC 1307H 138
AUSC 1309 138
AUSC 1309H 138
AUSF 1201 138
AUSF 1201H 138
AUSF 1202 138
AUSF 1202H 138
AUSF 1203 138
AUSF 1203H 138
AUSF 1204 138
AUSF 1204H 138
AUSF 1207 138
AUSF 1207H 138
AUSF 1209 138
AUSF 1209H 138
AUSF 1301 138
AUSF 1301H 138
AUSF 1302 138
AUSF 1302H 138
AUSF 1303 138
AUSF 1303H 138
AUSF 1304 138
AUSF 1304H 138
AUSF 1307 138
AUSF 1307H 138
AUSF 1309 138

AUSF 1309H 138
AUTR 1722 240
AUTR 1733 240
AUTR 1744 240
AUTR 1777 240
AUTR 1799 240
AUTW 1711 240
AUTW 1722 240
AUTW 1733 240
AUCI T001 48
AUCI T002 48
AUCI T003 48
AUCI T004 48
AUCI T007 48
AUCI T009 48
AUCI T201 49
AUCI T202 49
AUCI T203 49
AUCI T204 49
AUCI T207 49
AUCI T209 49
AWBD 21111 104
AWBD 21111H 104
AWBD 21113 107
AWBD 21113H 107
AWBD 21311 110
AWBD 21311H 110
AWBD 21331 107
AWBD 21331H 107
AWBD 22222 104
AWBD 22222H 104
AWBD 22223 107
AWBD 22223H 107
AWBD 22322 110
AWBD 22322H 110
AWBD 22332 107
AWBD 22332H 107
AWBD 23331 107
AWBD 23331H 107
AWBD 23332 107
AWBD 23332H 107
AWBD 23333 104
AWBD 23333H 104
AWBD 24444 104
AWBD 24444H 104
AWBD 27777 104
AWBD 27777H 104
AWBD 29999 104
AWBD 29999H 104
AWBD 31111 104
AWBD 31111H 104
AWBD 31113 107
AWBD 31113H 107
AWBD 31311 110
AWBD 31311H 110
AWBD 31331 107
AWBD 31331H 107
AWBD 32222 104
AWBD 32222H 104
AWBD 32223 107
AWBD 32223H 107
AWBD 32322 110
AWBD 32322H 110
AWBD 32332 107
AWBD 32332H 107
AWBD 33331 107
AWBD 33331H 107
AWBD 33332 107
AWBD 33332H 107
AWBD 33333 104
AWBD 33333H 104
AWBD 34444 104
AWBD 34444H 104
AWBD 37777 104
AWBD 37777H 104
AWBD 39999 104
AWBD 39999H 104
AWBI 21111 103
AWBI 21111H 103
AWBI 21113 106
AWBI 21113H 106
AWBI 21311 109
AWBI 21311H 109
AWBI 21331 106
AWBI 21331H 106
AWBI 22222 103
AWBI 22222H 103
AWBI 22223 106
AWBI 22223H 106
AWBI 22322 109
AWBI 22322H 109
AWBI 22332 106
AWBI 22332H 106
AWBI 23331 106
AWBI 23331H 106
AWBI 23332 106
AWBI 23332H 106
AWBI 23333 103
AWBI 23333H 103
AWBI 24444 103
AWBI 24444H 103
AWBI 27777 103
AWBI 27777H 103
AWBI 29999 103
AWBI 29999H 103
AWBI 31111 103
AWBI 31111H 103
AWBI 31113 106
AWBI 31113H 106
AWBI 31311 109
AWBI 31311H 109
AWBI 31331 106
AWBI 31331H 106
AWBI 32222 103
AWBI 32222H 103
AWBI 32223 106
AWBI 32223H 106
AWBI 32322 109
AWBI 32322H 109
AWBI 32332 106
AWBI 32332H 106
AWBI 33331 106
AWBI 33331H 106
AWBI 33332 106
AWBI 33332H 106
AWBI 33333 103
AWBI 33333H 103
AWBI 34444 103
AWBI 34444H 103
AWBI 37777 103
AWBI 37777H 103
AWBI 39999 103
AWBI 39999H 103
AWBS 21111 105
AWBS 21111H 105
AWBS 22222 105
AWBS 22222H 105
AWBS 23333 105
AWBS 23333H 105
AWBS 24444 105
AWBS 24444H 105
AWBS 27777 105
AWBS 27777H 105
AWBS 29999 105
AWBS 29999H 105
AWBS 31111 105
AWBS 31111H 105
AWBS 32222 105
AWBS 32222H 105
AWBS 33333 105
AWBS 33333H 105
AWBS 34444 105
AWBS 34444H 105
AWBS 37777 105
AWBS 37777H 105
AWBS 39999 105
AWBS 39999H 105
AWBU 21111 105
AWBU 21111H 105
AWBU 21113 108
AWBU 21113H 108
AWBU 21311 110
AWBU 21311H 110
AWBU 21331 108
AWBU 21331H 108
AWBU 22222 105
AWBU 22222H 105
AWBU 22223 108
AWBU 22223H 108
AWBU 22322 110
AWBU 22322H 110
AWBU 22332 108
AWBU 22332H 108
AWBU 23331 108
AWBU 23331H 108
AWBU 23332 108
AWBU 23332H 108
AWBU 23333 105
AWBU 23333H 105
AWBU 24444 105
AWBU 24444H 105
AWBU 27777 105
AWBU 27777H 105
AWBU 29999 105
AWBU 29999H 105
AWBU 31111 105
AWBU 31111H 105
AWBU 31113 108
AWBU 31113H 108
AWBU 31311 110
AWBU 31311H 110
AWBU 31331 108
AWBU 31331H 108
AWBU 32222 105
AWBU 32222H 105
AWBU 32223 108
AWBU 32223H 108
AWBU 32322 110
AWBU 32322H 110
AWBU 32332 108
AWBU 32332H 108
AWBU 33331 108
AWBU 33331H 108
AWBU 33332 108
AWBU 33332H 108
AWBU 33333 105
AWBU 33333H 105
AWBU 34444 105
AWBU 34444H 105
AWBU 37777 105
AWBU 37777H 105
AWBU 39999 105
AWBU 39999H 105
AYTR 2444 238
AYTR 2702 238
AYTR 2702H 238
AYTR 2703 238
AYTR 2703H 238
AYTR 2704H 238
AYTR 2707 238
AYTR 2707 239
AYTR 2707H 238
AYTR 2707H 239
AYTR 2709 238
AYTR 2709 239
AYTR 2709H 238
AYTR 2709H 239
AYTR 2902 239
AYTR 2902H 239
AYTR 2903 239
AYTR 2903H 239
AYTR 2904 239
AYTR 2904H 239
AYTR 3444 238
AYTR 3702 238
AYTR 3702H 238
AYTR 3703 238
AYTR 3703H 238
AYTR 3704H 238
AYTR 3707 238
AYTR 3707 239
AYTR 3707H 238
AYTR 3707H 239
AYTR 3709 238
AYTR 3709 239
AYTR 3709H 238
AYTR 3709H 239
AYTR 3902 239
AYTR 3902H 239
AYTR 3903 239
AYTR 3903H 239
AYTR 3904 239
AYTR 3904H 239
AYTW 2701 238
AYTW 2701H 238
AYTW 2702 238
AYTW 2702H 238
AYTW 2703 238
AYTW 2703H 238
AYTW 2901 239
AYTW 2901H 239
AYTW 2902 239
AYTW 2902H 239
AYTW 2903 239
AYTW 2903H 239
AYTW 3701 238
AYTW 3701H 238
AYTW 3702 238
AYTW 3702H 238
AYTW 3703 238
AYTW 3703H 238
AYTW 3901 239
AYTW 3901H 239
AYTW 3902 239
AYTW 3902H 239
AYTW 3903 239
AYTW 3903H 239
AYUP 2111 44
AYUP 2111H 44
AYUP 2113 45
AYUP 2113H 45
AYUP 2122 44
AYUP 2122H 44
AYUP 2123 45
AYUP 2123H 45
AYUP 2131 45
AYUP 2131H 45
AYUP 2132 45
AYUP 2132H 45
AYUP 2133 44
AYUP 2133H 44
AYUP 2144 44
AYUP 2144H 44
AYUP 2177 44
AYUP 2177H 44
AYUP 2199 44
AYUP 2199H 44
AYUP 2211 44
AYUP 2211H 44
AYUP 2213 45
AYUP 2213H 45
AYUP 2222 44
AYUP 2222H 44
AYUP 2223 45
AYUP 2223H 45
AYUP 2231 45
AYUP 2231H 45
AYUP 2232 45
AYUP 2232H 45
AYUP 2233 44
AYUP 2233H 44
AYUP 2244 44
AYUP 2244H 44
AYUP 2277 44
AYUP 2277H 44
AYUP 2299 44
AYUP 2299H 44
AYUP 3111 44
AYUP 3111H 44
AYUP 3113 45
AYUP 3113H 45
AYUP 3122 44
AYUP 3122H 44
AYUP 3123 45
AYUP 3123H 45
AYUP 3131 45
AYUP 3131H 45
AYUP 3132 45
AYUP 3132H 45
AYUP 3133 44
AYUP 3133H 44
AYUP 3144 44
AYUP 3144H 44
AYUP 3177 44
AYUP 3177H 44
AYUP 3199 44
AYUP 3199H 44
AYUP 3211 44
AYUP 3211H 44
AYUP 3213 45
AYUP 3213H 45
AYUP 3222 44
AYUP 3222H 44
AYUP 3223 45
AYUP 3223H 45
AYUP 3231 45
AYUP 3231H 45
AYUP 3232 45
AYUP 3232H 45
AYUP 3233 44
AYUP 3233H 44
AYUP 3244 44
AYUP 3244H 44
AYUP 3277 44
AYUP 3277H 44
AYUP 3299 44
AYUP 3299H 44
BCIC 1002 63
BCIC 1022 63
BCIC 2002 63
BCIC 2022 63
BCIC 7002 63
BCIC 7022 63
BCIC 8002 63
BCIC 8022 63
BCIC 9002 63
BCIC 9022 63
BCIF 1000 63
BCIF 1020 63
BCIF 2000 63
BCIF 2020 63
BCIF 7000 63
BCIF 7020 63
BCIF 8000 63
BCIF 8020 63
BCIF 9000 63
BCIF 9020 63
BCIXC 1002 202
BCIXC 1002 221
BCIXC 1022 202
BCIXC 1022 221
BCIXC 2002 202
BCIXC 2002 221
BCIXC 2022 202

BCIXC 2022 221
BCIXC 7002 202
BCIXC 7002 221
BCIXC 7022 202
BCIXC 7022 221
BCIXC 8002 202
BCIXC 8002 221
BCIXC 8022 202
BCIXC 8022 221
BCIXC 9002 202
BCIXC 9002 221
BCIXC 9022 202
BCIXC 9022 221
BCIXF 1000 202
BCIXF 1000 221
BCIXF 1020 202
BCIXF 1020 221
BCIXF 2000 202
BCIXF 2000 221
BCIXF 2020 202
BCIXF 2020 221
BCIXF 7000 202
BCIXF 7000 221
BCIXF 7020 202
BCIXF 7020 221
BCIXF 8000 202
BCIXF 8000 221
BCIXF 8020 202
BCIXF 8020 221
BCIXF 9000 202
BCIXF 9000 221
BCIXF 9020 202
BCIXF 9020 221
BCMC 1002 64
BCMC 1022 64
BCMC 2002 64
BCMC 2022 64
BCMC 7002 64
BCMC 8002 64
BCMC 8022 64
BCMC 9002 64
BCMC 9022 64
BCMF 1000 64
BCMF 1020 64
BCMF 2000 64
BCMF 2020 64
BCMF 7000 64
BCMF 7020 64
BCMF 8000 64
BCMF 8020 64
BCMF 9000 64
BCMF 9020 64
BCMXC 1002 203
BCMXC 1002 222
BCMXC 1022 203
BCMXC 1022 222
BCMXC 2002 203
BCMXC 2002 222
BCMXC 2022 203
BCMXC 2022 222
BCMXC 7002 203
BCMXC 7002 222
BCMXC 7022 203
BCMXC 7022 222
BCMXC 8002 203
BCMXC 8002 222
BCMXC 8022 203
BCMXC 8022 222
BCMXC 9002 203
BCMXC 9002 222
BCMXC 9022 203
BCMXC 9022 222
BCMXF 1000 203
BCMXF 1000 222
BCMXF 1020 203
BCMXF 1020 222
BCMXF 2000 203
BCMXF 2000 222
BCMXF 2020 203
BCMXF 2020 222
BCMXF 7000 203
BCMXF 7000 222
BCMXF 7020 203
BCMXF 7020 222
BCMXF 8000 203
BCMXF 8000 222
BCMXF 8020 203
BCMXF 8020 222
BCMXF 9000 203
BCMXF 9000 222
BCMXF 9020 203
BCMXF 9020 222
BDDA 0811 62
BDDA 0811 148
BDDA 0811 149
BDDA 0811 154
BDDA 0811 155
BDDA 0811 160
BDDA 0811 161
BDDA 0811 166
BDDA 0811 167
BDDA 0811 172
BDDA 0811 173
BDDA 0811 178
BDDA 0811 179
BDDA 0811 192
BDDA 0811 193
BDDA 0822 62
BDDA 0822 148
BDDA 0822 149
BDDA 0822 154
BDDA 0822 155
BDDA 0822 160
BDDA 0822 161
BDDA 0822 166
BDDA 0822 167
BDDA 0822 172
BDDA 0822 173
BDDA 0822 178
BDDA 0822 179
BDDA 0822 192
BDDA 0822 193
BDPU 0811 62
BDPU 0811 148
BDPU 0811 149
BDPU 0811 154
BDPU 0811 155
BDPU 0811 160
BDPU 0811 161
BDPU 0811 166
BDPU 0811 167
BDPU 0811 172
BDPU 0811 173
BDPU 0811 178
BDPU 0811 179
BDPU 0811 192
BDPU 0811 193
BDPU 0822 62
BDPU 0822 148
BDPU 0822 149
BDPU 0822 154
BDPU 0822 155
BDPU 0822 160
BDPU 0822 161
BDPU 0822 166
BDPU 0822 167
BDPU 0822 172
BDPU 0822 173
BDPU 0822 178
BDPU 0822 179
BDPU 0822 192
BDPU 0822 193
BEWW 6010 212
BEWW 6010 228
BEWW 6012 212
BEWW 6012 228
BIEXC 1610 207
BIEXC 1610 223
BIEXC 1618 207
BIEXC 1618 223
BIEXC 1620 207
BIEXC 1620 223
BIEXC 1628 207
BIEXC 1628 223
BIEXC 1670 207
BIEXC 1670 223
BIEXC 1678 207
BIEXC 1678 223
BIEXC 1680 207
BIEXC 1680 223
BIEXC 1688 207
BIEXC 1688 223
BIEXC 1690 207
BIEXC 1690 223
BIEXC 1698 207
BIEXC 1698 223
BIEXF 1610 207
BIEXF 1610 223
BIEXF 1618 207
BIEXF 1618 223
BIEXF 1620 207
BIEXF 1620 223
BIEXF 1628 207
BIEXF 1628 223
BIEXF 1670 207
BIEXF 1670 223
BIEXF 1678 207
BIEXF 1678 223
BIEXF 1680 207
BIEXF 1680 223
BIEXF 1688 207
BIEXF 1688 223
BIEXF 1690 207
BIEXF 1690 223
BIEXF 1698 207
BIEXF 1698 223
BIINC 1610 66
BIINC 1618 66
BIINC 1620 66
BIINC 1628 66
BIINC 1670 66
BIINC 1678 66
BIINC 1680 66
BIINC 1688 66
BIINC 1690 66
BIINC 1698 66
BIINF 1610 66
BIINF 1618 66
BIINF 1620 66
BIINF 1628 66
BIINF 1670 66
BIINF 1678 66
BIINF 1680 66
BIINF 1688 66
BIINF 1690 66
BIINF 1698 66
BIUI 0001 65
BIUI 0002 65
BIUI 0007 65
BIUI 0008 65
BIUI 0009 65
BIUI 0021 65
BIUI 0022 65
BIUI 0027 65
BIUI 0028 65
BIUI 0029 65
BIUM 0001 65
BIUM 0002 65
BIUM 0007 65
BIUM 0008 65
BIUM 0009 65
BIUM 0021 65
BIUM 0022 65
BIUM 0027 65
BIUM 0028 65
BIUM 0029 65
BIUP 1610 66
BIUP 1618 66
BIUP 1620 66
BIUP 1628 66
BIUP 1670 66
BIUP 1678 66
BIUP 1680 66
BIUP 1688 66
BIUP 1690 66
BIUP 1698 66
BLCII 1100 67
BLCII 1102 67
BLCII 1120 67
BLCII 1122 67
BLCIM 1100 68
BLCIM 1102 68
BLCIM 1120 68
BLCIM 1122 68
BLCXI 1100 208
BLCXI 1100 224
BLCXI 1102 208
BLCXI 1102 224
BLCXI 1120 208
BLCXI 1120 224
BLCXI 1122 208
BLCXI 1122 224
BLCXM 1100 209
BLCXM 1100 225
BLCXM 1102 209
BLCXM 1102 225
BLCXM 1120 209
BLCXM 1120 225
BLCXM 1122 209
BLCXM 1122 225
BLWII 1100 119
BLWII 1102 119
BLWII 1120 119
BLWII 1122 119
BLWIM 1100 120
BLWIM 1102 120
BLWIM 1120 120
BLWIM 1122 120
BLWXI 1100 210
BLWXI 1100 226
BLWXI 1102 210
BLWXI 1102 226
BLWXI 1120 210
BLWXI 1120 226
BLWXI 1122 210
BLWXI 1122 226
BLWXM 1100 211
BLWXM 1100 227
BLWXM 1102 211
BLWXM 1102 227
BLWXM 1120 211
BLWXM 1120 227
BLWXM 1122 211
BLWXM 1122 227
BNDN 0811 62
BNDN 0811 148
BNDN 0811 149
BNDN 0811 154
BNDN 0811 155
BNDN 0811 160
BNDN 0811 161
BNDN 0811 166
BNDN 0811 167
BNDN 0811 172
BNDN 0811 173
BNDN 0811 178
BNDN 0811 179
BNDN 0811 192
BNDN 0811 193
BNDN 0822 62
BNDN 0822 148
BNDN 0822 149
BNDN 0822 154
BNDN 0822 155
BNDN 0822 160
BNDN 0822 161
BNDN 0822 166
BNDN 0822 167
BNDN 0822 172
BNDN 0822 173
BNDN 0822 178
BNDN 0822 179
BNDN 0822 192
BNDN 0822 193
BOEX 1600 213
BOEX 1600 229
BOEX 1602 213
BOEX 1602 229
BOEX 1608 213
BOEX 1608 229
BOEX 1680 213
BOEX 1680 229
BOIN 1600 70
BOIN 1602 70
BOIN 1608 70
BOIN 1680 70
BOWW 1001 71
BOWW 1001 121
BOWW 1002 71
BOWW 1002 121
BOWW 1003 71
BOWW 1003 121
BOWW 1009 71
BOWW 1009 121
BOWW 1101 71
BOWW 1101 121
BOWW 1102 71
BOWW 1102 121
BOWW 1103 71
BOWW 1103 121
BOWW 1109 71
BOWW 1109 121
BOWW 5201 13
BOWW 5202 13
BOWW 5203 13
BOWW 5209 13
BOWW 6010 69
BOWW 6012 69
BUEX 1610 207
BUEX 1610 224
BUEX 1618 207
BUEX 1618 224
BUEX 1620 207
BUEX 1620 224
BUEX 1628 207
BUEX 1628 224
BUEX 1628 224
BUEX 1670 207
BUEX 1670 224
BUEX 1678 207
BUEX 1678 224
BUEX 1680 207
BUEX 1680 224
BUEX 1688 207
BUEX 1688 224
BUEX 1690 207
BUEX 1690 224
BUEX 1698 207
BUEX 1698 224
BWIC 1002 117
BWIC 1022 117
BWIC 2002 117
BWIC 2022 117

BWIC 7002 117
BWIC 7022 117
BWIC 8002 117
BWIC 8022 117
BWIC 9002 117
BWIC 9022 117
BWIF 1000 117
BWIF 1020 117
BWIF 2000 117
BWIF 2020 117
BWIF 7000 117
BWIF 7020 117
BWIF 8000 117
BWIF 8020 117
BWIF 9000 117
BWIF 9020 117
BWIXC 1002 204
BWIXC 1022 204
BWIXC 2002 204
BWIXC 2022 204
BWIXC 7002 204
BWIXC 7022 204
BWIXC 8002 204
BWIXC 8022 204
BWIXC 9002 204
BWIXC 9022 204
BWIXF 1000 204
BWIXF 1020 204
BWIXF 2000 204
BWIXF 2020 204
BWIXF 7000 204
BWIXF 7020 204
BWIXF 8000 204
BWIXF 8020 204
BWIXF 9000 204
BWIXF 9020 204
BWMC 1002 118
BWMC 1022 118
BWMC 2002 118
BWMC 2022 118
BWMC 7002 118
BWMC 7022 64
BWMC 7022 118
BWMC 8002 118
BWMC 8022 118
BWMC 9002 118
BWMC 9022 118
BWMF 1000 118
BWMF 1020 118
BWMF 2000 118
BWMF 2020 118
BWMF 7000 118
BWMF 7020 118
BWMF 8000 118
BWMF 8020 118
BWMF 9000 118
BWMF 9020 118
BWMXC 1002 205
BWMXC 1022 205
BWMXC 2002 205
BWMXC 2022 205
BWMXC 7002 205
BWMXC 7022 205
BWMXC 8002 205
BWMXC 8022 205
BWMXC 9002 205
BWMXC 9022 205
BWMXF 1000 205
BWMXF 1020 205
BWMXF 2000 205
BWMXF 2020 205
BWMXF 7000 205
BWMXF 7020 205
BWMXF 8000 205
BWMXF 8020 205
BWMXF 9000 205
BWMXF 9020 205
BXUI 0001 206
BXUI 0001 222
BXUI 0002 206
BXUI 0002 222
BXUI 0007 206
BXUI 0007 222
BXUI 0008 206
BXUI 0008 222
BXUI 0009 206
BXUI 0009 222
BXUI 0021 206
BXUI 0021 222
BXUI 0022 206
BXUI 0022 222
BXUI 0027 206
BXUI 0027 222
BXUI 0028 206
BXUI 0028 222
BXUI 0029 206
BXUI 0029 222
BXUM 0001 206
BXUM 0001 223
BXUM 0002 206
BXUM 0002 223
BXUM 0007 206
BXUM 0007 223
BXUM 0008 206
BXUM 0008 223
BXUM 0009 206
BXUM 0009 223
BXUM 0021 206
BXUM 0021 223
BXUM 0022 206
BXUM 0022 223
BXUM 0027 206
BXUM 0027 223
BXUM 0028 206
BXUM 0028 223
BXUM 0029 206
BXUM 0029 223
CODE 1001 72
CODE 1002 73
CODE 1005 122
CODE 1006 215
CODE 1006 231
CODE 1105 72
CODE 1207 73
CODE 1555 123
CODE 1605 72
CODE 1666 123
CODE 2001 72
CODE 2002 73
CODE 2005 122
CODE 2006 215
CODE 2006 231
CODE 2105 72
CODE 2207 73
CODE 2405 72
CODE 2555 123
CODE 2666 123
CODE 3001 72
CODE 3002 73
CODE 3005 122
CODE 3105 72
CODE 3207 73
CODE 3555 123
CODE 3605 72
CODE 3666 123
CODE 7001 72
CODE 7002 73
CODE 7005 122
CODE 7006 215
CODE 7006 231
CODE 7105 72
CODE 7207 73
CODE 7555 123
CODE 7605 72
CODE 7666 123
CODE 9001 72
CODE 9002 73
CODE 9005 122
CODE 9105 72
CODE 9207 73
CODE 9555 123
CODE 9605 72
CODE 9666 123
CODE L1005 122
CODE L1006 215
CODE L1006 231
CODE L2005 122
CODE L2006 215
CODE L2006 231
CODE L3005 122
CODE L7005 122
CODE L7006 215
CODE L7006 231
CODE L9005 122
COEX 1001 214
COEX 1001 229
COEX 1002 214
COEX 1002 230
COEX 1111 216
COEX 1111 231
COEX 1151 214
COEX 1151 230
COEX 1211 216
COEX 1211 231
COEX 1251 215
COEX 1251 230
COEX 2001 214
COEX 2001 229
COEX 2002 214
COEX 2002 230
COEX 2111 216
COEX 2111 231
COEX 2151 214
COEX 2151 230
COEX 2211 216
COEX 2211 231
COEX 2251 215
COEX 2251 230
COEX 3001 214
COEX 3001 229
COEX 3002 214
COEX 3002 230
COEX 7111 216
COEX 7111 231
COEX 7151 214
COEX 7151 230
COEX 7211 216
COEX 7211 231
COEX 7251 215
COEX 7251 230
COGU 0051 82
COGU 0052 85
COGU 0054 88
CONC 0007 81
CONC 0051 83
CONC 0052 86
CONC 0054 89
CONC 0070 91
CONC 0110 92
CONC 0111 94
ELEM 1222 51
ELEM 1313 51
ELEM 1323 51
ELEM 1422 51
ELEM 1727 51
ELEM 1922 51
ELEM 2222 51
ELEM 2313 51
ELEM 2323 51
ELEM 2422 51
ELEM 2727 51
ELEM 2922 51
ELEM 3222 52
ELEM 3313 52
ELEM 3323 52
ELEM 3422 52
ELEM 3727 52
ELEM 3922 52
ELEM 4222 52
ELEM 4313 52
ELEM 4323 52
ELEM 4422 52
ELEM 4727 52
ELEM 4922 52
ELEM 5222 53
ELEM 5313 53
ELEM 5323 53
ELEM 5422 53
ELEM 5727 53
ELEM 5922 53
ELEM 6222 53
ELEM 6313 53
ELEM 6323 53
ELEM 6422 53
ELEM 6922 53
ELEM 7222 54
ELEM 7313 54
ELEM 7323 54
ELEM 7422 54
ELEM 7722 54
ELEM 7922 54
ELEM 8222 54
ELEM 8313 54
ELEM 8323 54
ELEM 8422 54
ELEM 8724 54
ELEM 8922 54
HEC+ 0013 59
HEC+ 0019 59
HEC+ 0022 59
HEC+ 0023 59
HEC+ 0024 59
HEC+ 0027 59
HEC+ 0029 59
HEC+ 0113 59
HEC+ 0119 59
HEC+ 0122 59
HEC+ 0123 59
HEC+ 0124 59
HEC+ 0127 59
HEC+ 0129 59
HEC+ 0213 59
HEC+ 0219 59
HEC+ 0222 59
HEC+ 0223 59
HEC+ 0224 59
HEC+ 0227 59
HEC+ 0229 59
HEC+ 0513 59
HEC+ 0519 59
HEC+ 0522 59
HEC+ 0523 59
HEC+ 0524 59
HEC+ 0527 59
HEC+ 0529 59
HEC+ L013 60
HEC+ L019 60
HEC+ L022 60
HEC+ L023 60
HEC+ L024 60
HEC+ L027 60
HEC+ L029 60
HEC+ L113 60
HEC+ L119 60
HEC+ L122 60
HEC+ L123 60
HEC+ L124 60
HEC+ L127 60
HEC+ L129 60
HEC+ L213 60
HEC+ L219 60
HEC+ L222 60
HEC+ L223 60
HEC+ L224 60
HEC+ L227 60
HEC+ L229 60
HEC+ L513 60
HEC+ L519 60
HEC+ L522 60
HEC+ L523 60
HEC+ L524 60
HEC+ L527 60
HEC+ L529 60
HEC- 0013 59
HEC- 0019 59
HEC- 0022 59
HEC- 0023 59
HEC- 0024 59
HEC- 0027 59
HEC- 0029 59
HEC90 0013 60
HEC90 0019 60
HEC90 0022 60
HEC90 0023 60
HEC90 0024 60
HEC90 0027 60
HEC90 0029 60
HEC90 0113 60
HEC90 0119 60
HEC90 0122 60
HEC90 0123 60
HEC90 0124 60
HEC90 0127 60
HEC90 0129 60
HEC90 0213 60
HEC90 0219 60
HEC90 0222 60
HEC90 0223 60
HEC90 0224 60
HEC90 0227 60
HEC90 0229 60
HEC90 0513 60
HEC90 0519 60
HEC90 0522 60
HEC90 0523 60
HEC90 0524 60
HEC90 0527 60
HEC90 0529 60
HEC90 L013 61
HEC90 L019 61
HEC90 L022 61
HEC90 L023 61
HEC90 L024 61
HEC90 L027 61
HEC90 L029 61
HEC90 L113 61
HEC90 L119 61
HEC90 L122 61
HEC90 L123 61
HEC90 L124 61
HEC90 L127 61
HEC90 L129 61
HEC90 L213 61
HEC90 L219 61
HEC90 L222 61
HEC90 L223 61
HEC90 L224 61
HEC90 L227 61
HEC90 L229 61
HEC90 L513 61
HEC90 L519 61
HEC90 L522 61
HEC90 L523 61
HEC90 L524 61

HEC90 L527 61
HEC90 L529 61
HEC- 0113 59
HEC- 0119 59
HEC120 0013 60
HEC120 0019 60
HEC120 0022 60
HEC120 0023 60
HEC120 0024 60
HEC120 0027 60
HEC120 0029 60
HEC120 0113 60
HEC120 0119 60
HEC120 0122 60
HEC120 0123 60
HEC120 0124 60
HEC120 0127 60
HEC120 0129 60
HEC120 0213 60
HEC120 0219 60
HEC120 0222 60
HEC120 0223 60
HEC120 0224 60
HEC120 0227 60
HEC120 0229 60
HEC120 0513 60
HEC120 0519 60
HEC120 0522 60
HEC120 0523 60
HEC120 0524 60
HEC120 0527 60
HEC120 0529 60
HEC120 L013 61
HEC120 L019 61
HEC120 L022 61
HEC120 L023 61
HEC120 L024 61
HEC120 L027 61
HEC120 L029 61
HEC120 L113 61
HEC120 L119 61
HEC120 L122 61
HEC120 L123 61
HEC120 L124 61
HEC120 L127 61
HEC120 L129 61
HEC120 L213 61
HEC120 L219 61
HEC120 L222 61
HEC120 L223 61
HEC120 L224 61
HEC120 L227 61
HEC120 L229 61
HEC120 L513 61
HEC120 L519 61
HEC120 L522 61
HEC120 L523 61
HEC120 L524 61
HEC120 L527 61
HEC120 L529 61
HEC- 0122 59
HEC- 0123 59
HEC- 0124 59
HEC- 0127 59
HEC- 0129 59
HEC- 0213 59
HEC- 0219 59
HEC- 0222 59
HEC- 0223 59
HEC- 0224 59
HEC- 0227 59
HEC- 0229 59
HEC- 0513 59
HEC- 0519 59
HEC- 0522 59
HEC- 0523 59
HEC- 0524 59
HEC- 0527 59
HEC- 0529 59
HECE 0013 59
HECE 0019 59
HECE 0022 59
HECE 0023 59
HECE 0024 59
HECE 0027 59
HECE 0029 59
HECE 0113 59
HECE 0119 59
HECE 0122 59
HECE 0123 59
HECE 0124 59
HECE 0127 59
HECE 0129 59
HECE 0213 59
HECE 0219 59
HECE 0222 59
HECE 0223 59
HECE 0224 59
HECE 0227 59
HECE 0229 59
HECE 0513 59
HECE 0519 59
HECE 0522 59
HECE 0523 59
HECE 0524 59
HECE 0527 59
HECE 0529 59
HEC- L013 60
HEC- L019 60
HEC- L022 60
HEC- L023 60
HEC- L024 60
HEC- L027 60
HEC- L029 60
HEC- L113 60
HEC- L119 60
HEC- L122 60
HEC- L123 60
HEC- L124 60
HEC- L127 60
HEC- L129 60
HEC- L213 60
HEC- L219 60
HEC- L222 60
HEC- L223 60
HEC- L224 60
HEC- L227 60
HEC- L229 60
HEC- L513 60
HEC- L519 60
HEC- L522 60
HEC- L523 60
HEC- L524 60
HEC- L527 60
HEC- L529 60
HECT 0013 59
HECT 0019 59
HECT 0022 59
HECT 0023 59
HECT 0024 59
HECT 0027 59
HECT 0029 59
HECT 0113 59
HECT 0119 59
HECT 0122 59
HECT 0123 59
HECT 0124 59
HECT 0127 59
HECT 0129 59
HECT 0213 59
HECT 0219 59
HECT 0222 59
HECT 0223 59
HECT 0224 59
HECT 0227 59
HECT 0229 59
HECT 0513 59
HECT 0519 59
HECT 0522 59
HECT 0523 59
HECT 0524 59
HECT 0527 59
HECT 0529 59
HECT L013 61
HECT L019 61
HECT L022 61
HECT L023 61
HECT L024 61
HECT L027 61
HECT L029 61
HECT L113 61
HECT L119 61
HECT L122 61
HECT L123 61
HECT L124 61
HECT L127 61
HECT L129 61
HECT L213 61
HECT L219 61
HECT L222 61
HECT L223 61
HECT L224 61
HECT L227 61
HECT L229 61
HECT L513 61
HECT L519 61
HECT L522 61
HECT L523 61
HECT L524 61
HECT L527 61
HECT L529 61
HECX 0013 59
HECX 0019 59
HECX 0022 59
HECX 0023 59
HECX 0024 59
HECX 0027 59
HECX 0029 59
HECX 0113 59
HECX 0119 59
HECX 0122 59
HECX 0123 59
HECX 0124 59
HECX 0127 59
HECX 0129 59
HECX 0213 59
HECX 0219 59
HECX 0222 59
HECX 0223 59
HECX 0224 59
HECX 0227 59
HECX 0229 59
HECX 0513 59
HECX 0519 59
HECX 0522 59
HECX 0523 59
HECX 0524 59
HECX 0527 59
HECX 0529 59
HECX L013 61
HECX L019 61
HECX L022 61
HECX L023 61
HECX L024 61
HECX L027 61
HECX L029 61
HECX L113 61
HECX L119 61
HECX L122 61
HECX L123 61
HECX L124 61
HECX L127 61
HECX L129 61
HECX L213 61
HECX L219 61
HECX L222 61
HECX L223 61
HECX L224 61
HECX L227 61
HECX L229 61
HECX L513 61
HECX L519 61
HECX L522 61
HECX L523 61
HECX L524 61
HECX L527 61
HECX L529 61
HECY 0013 59
HECY 0019 59
HECY 0022 59
HECY 0023 59
HECY 0024 59
HECY 0027 59
HECY 0029 59
HECY 0113 59
HECY 0119 59
HECY 0122 59
HECY 0123 59
HECY 0124 59
HECY 0127 59
HECY 0129 59
HECY 0213 59
HECY 0219 59
HECY 0222 59
HECY 0223 59
HECY 0224 59
HECY 0227 59
HECY 0229 59
HECY 0513 59
HECY 0519 59
HECY 0522 59
HECY 0523 59
HECY 0524 59
HECY 0527 59
HECY 0529 59
HECY L013 61
HECY L019 61
HECY L022 61
HECY L023 61
HECY L024 61
HECY L027 61
HECY L029 61
HECY L113 61
HECY L119 61
HECY L122 61
HECY L123 61
HECY L124 61
HECY L127 61
HECY L129 61
HECY L213 61
HECY L219 61
HECY L222 61
HECY L223 61
HECY L224 61
HECY L227 61
HECY L229 61
HECY L513 61
HECY L519 61
HECY L522 61
HECY L523 61
HECY L524 61
HECY L527 61
HECY L529 61
HEL+ 0002 57
HEL+ 0003 57
HEL+ 0004 57
HEL+ 0007 57
HEL+ 0009 57
HEL+ L002 58
HEL+ L003 58
HEL+ L004 58
HEL+ L007 58
HEL+ L009 58
HEL- 0002 57
HEL- 0003 57
HEL- 0004 57
HEL- 0007 57
HEL- 0009 57
HEL90 0002 57
HEL90 0003 57
HEL90 0004 57
HEL90 0007 57
HEL90 0009 57
HEL90 L002 58
HEL90 L003 58
HEL90 L004 58
HEL90 L007 58
HEL90 L009 58
HEL120 0002 57
HEL120 0003 57
HEL120 0004 57
HEL120 0007 57
HEL120 0009 57
HEL120 L002 58
HEL120 L003 58
HEL120 L004 58
HEL120 L007 58
HEL120 L009 58
HELE 0002 57
HELE 0003 57
HELE 0004 57
HELE 0007 57
HELE 0009 57
HELE L002 58
HELE L003 58
HELE L004 58
HELE L007 58
HELE L009 58
HEL- L002 58
HEL- L003 58
HEL- L004 58
HEL- L007 58
HEL- L009 58
HELR 2002 55
HELR 2003 55
HELR 2004 55
HELR 2007 55
HELR 2009 55
HELR 5002 55
HELR 5003 55
HELR 5004 55
HELR 5007 55
HELR 5009 55
HELR 7002 55
HELR 7003 55
HELR 7004 55
HELR 7007 55
HELR 7009 55
HELS 0022 56
HELS 0023 56
HELS 0027 56
HELS 0032 56
HELS 0033 56
HELS 0037 56
HELS 0042 56
HELS 0043 56
HELS 0047 56
HELS 0072 56
HELS 0073 56
HELS 0077 56
HELS 0092 56
HELS 0093 56
HELS 0097 56
HELS 0522 56

HELS 0523 56
HELS 0527 56
HELS 0532 56
HELS 0533 56
HELS 0537 56
HELS 0542 56
HELS 0543 56
HELS 0547 56
HELS 0572 56
HELS 0573 56
HELS 0577 56
HELS 0592 56
HELS 0593 56
HELS 0597 56
HELS 0922 55
HELS 0923 55
HELS 0927 55
HELS 0932 55
HELS 0933 55
HELS 0937 55
HELS 0942 55
HELS 0943 55
HELS 0947 55
HELS 0972 55
HELS 0973 55
HELS 0977 55
HELS 0992 55
HELS 0993 55
HELS 0997 55
HELS 1022 56
HELS 1023 56
HELS 1027 56
HELS 1032 56
HELS 1033 56
HELS 1037 56
HELS 1042 56
HELS 1043 56
HELS 1047 56
HELS 1072 56
HELS 1073 56
HELS 1077 56
HELS 1092 56
HELS 1093 56
HELS 1097 56
HELS 2022 56
HELS 2023 56
HELS 2027 56
HELS 2032 56
HELS 2033 56
HELS 2037 56
HELS 2042 56
HELS 2043 56
HELS 2047 56
HELS 2072 56
HELS 2073 56
HELS 2077 56
HELS 2092 56
HELS 2093 56
HELS 2097 56
HELT 0002 57
HELT 0003 57
HELT 0004 57
HELT 0007 57
HELT 0009 57
HELT L002 58
HELT L003 58
HELT L004 58
HELT L007 58
HELT L009 58
HELX 0002 57
HELX 0003 57
HELX 0004 57
HELX 0007 57
HELX 0009 57
HELX L002 58
HELX L003 58
HELX L004 58
HELX L007 58
HELX L009 58
HELY 0002 57
HELY 0003 57
HELY 0004 57
HELY 0007 57
HELY 0009 57
HELY L002 58
HELY L003 58
HELY L004 58
HELY L007 58
HELY L009 58
HVCA 3011 184
HVCA 3012 184
HVCA 3013 184
HVCA 3014 184
HVCA 3017 184
HVCA 3019 184
HVCA 3021 184
HVCA 3022 184
HVCA 3023 184
HVCA 3024 184
HVCA 3027 184
HVCA 3029 184
HVCBD 3311 185
HVCBD 3312 185
HVCBD 3313 185
HVCBD 3314 185
HVCBD 3317 185
HVCBD 3319 185
HVCBD 3321 185
HVCBD 3322 185
HVCBD 3323 185
HVCBD 3324 185
HVCBD 3327 185
HVCBD 3329 185
HVCC 3011 184
HVCC 3012 184
HVCC 3013 184
HVCC 3014 184
HVCC 3017 184
HVCC 3019 184
HVCC 3021 184
HVCC 3022 184
HVCC 3023 184
HVCC 3024 184
HVCC 3027 184
HVCC 3029 184
HVFL 1001 12
HVFL 1001AU 12
HVFL 1001UK 12
HVFL 1001US 12
HVFL 1002 12
HVFL 1002AU 12
HVFL 1002UK 12
HVFL 1002US 12
HVFL 1003 12
HVFL 1003AU 12
HVFL 1003UK 12
HVFL 1003US 12
HVFL 1004 12
HVFL 1004AU 12
HVFL 1004UK 12
HVFL 1004US 12
HVFL 1007 12
HVFL 1007AU 12
HVFL 1007UK 12
HVFL 1007US 12
HVFL 1009 12
HVFL 1009AU 12
HVFL 1009UK 12
HVFL 1009US 12
HVSBD 1111 183
HVSBD 1112 183
HVSBD 1113 183
HVSBD 1114 183
HVSBD 1117 183
HVSBD 1119 183
HVSC 1001 183
HVSC 1002 183
HVSC 1003 183
HVSC 1004 183
HVSC 1007 183
HVSC 1009 183
HVSU 1001 183
HVSU 1002 183
HVSU 1003 183
HVSU 1004 183
HVSU 1007 183
HVSU 1009 183
HVSU 4772 241
HVSU 4773 241
HVSU 4774 241
HVSU 4777 241
HVSU 4779 241
HVSU 4792 242
HVSU 4793 242
HVSU 4794 242
HVSU 4797 242
HVSU 4799 242
HVSW 4771 241
HVSW 4772 241
HVSW 4773 241
HVSW 4791 242
HVSW 4792 242
HVSW 4793 242
HVTA 1001 12
HVTA 1001AU 12
HVTA 1001UK 12
HVTA 1001US 12
HVTA 1002 12
HVTA 1002AU 12
HVTA 1002UK 12
HVTA 1002US 12
HVTA 1003 12
HVTA 1003AU 12
HVTA 1003UK 12
HVTA 1003US 12
HVTA 1004 12
HVTA 1004AU 12
HVTA 1004UK 12
HVTA 1004US 12
HVTA 1007 12
HVTA 1007AU 12
HVTA 1007UK 12
HVTA 1007US 12
HVTA 1009 12
HVTA 1009AU 12
HVTA 1009UK 12
HVTA 1009US 12
HVWA 1001 115
HVWA 1001AU 115
HVWA 1001UK 115
HVWA 1001US 115
HVWA 1002 115
HVWA 1002AU 115
HVWA 1002UK 115
HVWA 1002US 115
HVWA 1003 115
HVWA 1003AU 115
HVWA 1003UK 115
HVWA 1003US 115
HVWA 1004 115
HVWA 1004AU 115
HVWA 1004UK 115
HVWA 1004US 115
HVWA 1007 115
HVWA 1007AU 115
HVWA 1007UK 115
HVWA 1007US 115
HVWA 1009 115
HVWA 1009AU 115
HVWA 1009UK 115
HVWA 1009US 115
HVWB 1001 115
HVWB 1002 115
HVWB 1003 115
HVWB 1004 115
HVWB 1007 115
HVWB 1009 115
HVWT 1001 116
HVWT 1001AU 116
HVWT 1001EU 116
HVWT 1001UK 116
HVWT 1001US 116
HVWT 1002 116
HVWT 1002AU 116
HVWT 1002EU 116
HVWT 1002UK 116
HVWT 1002US 116
HVWT 1003 116
HVWT 1003AU 116
HVWT 1003EU 116
HVWT 1003UK 116
HVWT 1003US 116
HVWT 1004 116
HVWT 1004AU 116
HVWT 1004EU 116
HVWT 1004UK 116
HVWT 1004US 116
HVWT 1007 116
HVWT 1007AU 116
HVWT 1007EU 116
HVWT 1007UK 116
HVWT 1007US 116
HVWT 1009 116
HVWT 1009AU 116
HVWT 1009EU 116
HVWT 1009UK 116
HVWT 1009US 116
ITRO 1101 194
ITRO 1102 194
ITRO 1111 194
ITRO 1122 194
ITRO 2201 194
ITRO 2202 194
ITRO 2211 194
ITRO 2222 194
MIGU 1111 82
MIGU 1112 82
MIGU 1119 82
MIGU 1121 82
MIGU 1122 82
MIGU 1129 82
MIGU 1191 82
MIGU 1192 82
MIGU 1199 82
MIGU 1211 82
MIGU 1212 82
MIGU 1219 82
MIGU 1221 82
MIGU 1222 82
MIGU 1229 82
MIGU 1291 82
MIGU 1292 82
MIGU 1299 82
MIGU 2111 85
MIGU 2112 85
MIGU 2119 85
MIGU 2121 85
MIGU 2122 85
MIGU 2129 85
MIGU 2191 85
MIGU 2192 85
MIGU 2199 85
MIGU 2211 85
MIGU 2212 85
MIGU 2219 85
MIGU 2221 85
MIGU 2222 85
MIGU 2229 85
MIGU 2291 85
MIGU 2292 85
MIGU 2299 85
MIGU 4111 88
MIGU 4112 88
MIGU 4119 88
MIGU 4121 88
MIGU 4122 88
MIGU 4129 88
MIGU 4191 88
MIGU 4192 88
MIGU 4199 88
MIGU 4211 88
MIGU 4212 88
MIGU 4219 88
MIGU 4221 88
MIGU 4222 88
MIGU 4229 88
MIGU 4291 88
MIGU 4292 88
MIGU 4299 88
MIPI 1115 76
MIPI 1125 76
MIPI 1225 76
MIPI 1235 76
MIPI 1725 76
MIPI 1775 76
MIPI 1925 76
MIPI 1995 76
MIPI 2117 77
MIPI 2227 77
MIPI 2777 77
MIPI 2997 77
MIPI 4711 243
MIPI 4712 243
MIPI 4721 243
MIPI 4722 243
MIPRU 1115 77
MIPRU 1225 77
MIPRU 1775 77
MIPRU 1995 77
MIPU 1115 76
MIPU 1225 76
MIPU 1525 76
MIPU 1575 76
MIPU 1595 76
MIPU 1615 76
MIPU 1775 76
MIPU 1995 76
MIPU 2115 77
MIPU 2225 77
MIPU 2775 77
MIPU 2995 77
MIPU 3115 78
MIPU 3225 78
MIPU 3315 78
MIPU 3325 78
MIPU 3375 78
MIPU 3395 78
MIPU 3775 78
MIPU 3995 78
MIPW 4711 243
MIPW 4721 243
MIWW 1111 83
MIWW 1112 83
MIWW 1121 83
MIWW 1122 83
MIWW 1191 83
MIWW 1192 83
MIWW 1211 83
MIWW 1212 83
MIWW 1221 83
MIWW 1222 83
MIWW 1291 83
MIWW 1292 83
MIWW 2111 86

MIWW 2112 86
MIWW 2121 86
MIWW 2122 86
MIWW 2191 86
MIWW 2192 86
MIWW 2211 86
MIWW 2212 86
MIWW 2221 86
MIWW 2222 86
MIWW 2291 86
MIWW 2292 86
MIWW 4111 89
MIWW 4112 89
MIWW 4121 89
MIWW 4122 89
MIWW 4191 89
MIWW 4192 89
MIWW 4211 89
MIWW 4212 89
MIWW 4221 89
MIWW 4222 89
MIWW 4291 89
MIWW 4292 89
MRWW 12O1 84
MRWW 22O1 87
MRWW 42O1 89
MRWW 1101 84
MRWW 1102 84
MRWW 1202 84
MRWW 2101 87
MRWW 2102 87
MRWW 2202 87
MRWW 4101 89
MRWW 4102 89
MRWW 4202 89
MUGU 1111 84
MUGU 1112 84
MUGU 1119 84
MUGU 1121 84
MUGU 1122 84
MUGU 1129 84
MUGU 1211 84
MUGU 1212 84
MUGU 1219 84
MUGU 1221 84
MUGU 1222 84
MUGU 1229 84
MUGU 2111 87
MUGU 2112 87
MUGU 2119 87
MUGU 2121 87
MUGU 2122 87
MUGU 2129 87
MUGU 2211 87
MUGU 2212 87
MUGU 2219 87
MUGU 2221 87
MUGU 2222 87
MUGU 2229 87
MUGU 4111 90
MUGU 4112 90
MUGU 4119 90
MUGU 4121 90
MUGU 4122 90
MUGU 4129 90
MUGU 4211 90
MUGU 4212 90
MUGU 4219 90
MUGU 4221 90
MUGU 4222 90
MUGU 4229 90
MUWW 1111 85
MUWW 1112 85
MUWW 1121 85
MUWW 1122 85
MUWW 1211 85
MUWW 1212 85
MUWW 1221 85
MUWW 1222 85
MUWW 1511 85
MUWW 1512 85
MUWW 1521 85
MUWW 1522 85
MUWW 1611 85
MUWW 1612 85
MUWW 1621 85
MUWW 1622 85
MUWW 2111 88
MUWW 2111P 88
MUWW 2112 88
MUWW 2112P 88
MUWW 2121 88
MUWW 2121P 88
MUWW 2122 88
MUWW 2122P 88
MUWW 2211 88
MUWW 2211P 88
MUWW 2212 88
MUWW 2212P 88
MUWW 2221 88
MUWW 2221P 88
MUWW 2222 88
MUWW 2222P 88
MUWW 4111 90
MUWW 4111P 90
MUWW 4112 90
MUWW 4112P 90
MUWW 4121 90
MUWW 4121P 90
MUWW 4122 90
MUWW 4122P 90
MUWW 4211 90
MUWW 4211P 90
MUWW 4212 90
MUWW 4212P 90
MUWW 4221 90
MUWW 4221P 90
MUWW 4222 90
MUWW 4222P 90
NAGA 1111 78
NAGA 1112 78
NAGA 1116 78
NAGA 1117 78
NAGA 2111 78
NAGA 2112 78
NAGA 2116 78
NAGA 2117 78
NAGA 7111 78
NAGA 7112 78
NAGA 7116 78
NAGA 7117 78
NTRO 1000 195
NTRO 1111 195
NTRO 2000 195
NTRO 2222 195
PIIN 1101 78
PIIN 1102 79
PIIN 1111 78
PIIN 2101 78
PIIN 2102 79
PIIN 2111 78
PIIN 4101 78
PIIN 4102 79
PIIN 4111 78
PIIN 7101 78
PIIN 7102 79
PIIN 7111 78
PIIN 9101 78
PIIN 9102 79
PIIN 9111 78
PIUP L1050 79
PIUP L1150 79
PIUP L1152 80
PIUP L1154 80
PIUP L1156 80
PIUP L2050 79
PIUP L2150 79
PIUP L2152 80
PIUP L2154 80
PIUP L2156 80
PIUP L3050 79
PIUP L3150 79
PIUP L3152 80
PIUP L3154 80
PIUP L3156 80
PIUP L7050 79
PIUP L7150 79
PIUP L7152 80
PIUP L7154 80
PIUP L7156 80
PIUP L9050 79
PIUP L9150 79
PIUP L9152 80
PLAS 0007 81
PLAS 0051 84
PLAS 0052 87
PLAS 0054 89
PLAS 0070 91
PLAS 0110 93
PLAS 0111 94
PLBO 2000 63
PLBO 2000 64
PLBO 2000 66
PLBO 2000 67
PLBO 2000 68
PLBO 2000 69
PLBO 2000 70
PLBO 2000 117
PLBO 2000 118
PLBO 2000 119
PLBO 2000 120
PLBO 2000 202
PLBO 2000 203
PLBO 2000 204
PLBO 2000 205
PLBO 2000 207
PLBO 2000 208
PLBO 2000 209
PLBO 2000 210
PLBO 2000 211
PLBO 2000 212
PLBO 2000 213
PLBO 2000 221
PLBO 2000 222
PLBO 2000 223
PLBO 2000 224
PLBO 2000 225
PLBO 2000 226
PLBO 2000 227
PLBO 2000 228
PLBO 2000 229
SCAR 2750 13
SCAR 2751 13
SCAR 2752 13
SCAR 2753 13
SCAR 2757 13
SCAR 4011 130
SCAR 4031 130
SCAR 4035 130
SCAR 4035EU 131
SCAR 4061 130
SCAR 4065 130
SCAR 4065EU 131
SCAR 4075 130
SCAR 4075EU 131
SCAR 4201 128
SCAR 4201D 128
SCAR 4201P 128
SCAR 4231 128
SCAR 4231D 128
SCAR 4231P 128
SCAR 4251 128
SCAR 4251D 128
SCAR 4251P 128
SCAR 4271 128
SCAR 4271D 128
SCAR 4271P 128
SCAR 4281 128
SCAR 4281D 128
SCAR 4281P 128
SCAR 4311 130
SCAR 4331 130
SCAR 4335 130
SCAR 4335EU 131
SCAR 4361 130
SCAR 4365 130
SCAR 4365EU 131
SCAR 4375 130
SCAR 4375EU 131
SCAR 4401 128
SCAR 4401D 128
SCAR 4401P 128
SCAR 4431 128
SCAR 4431D 128
SCAR 4431P 128
SCAR 4451 128
SCAR 4451D 128
SCAR 4451P 128
SCAR 4471 128
SCAR 4471D 128
SCAR 4471P 128
SCAR 4481 128
SCAR 4481D 128
SCAR 4481P 128
SCAR 4511 130
SCAR 4531 130
SCAR 4535 130
SCAR 4535EU 131
SCAR 4561 130
SCAR 4565 130
SCAR 4565EU 131
SCAR 4575 130
SCAR 4575EU 131
SCAR 4701 128
SCAR 4701D 128
SCAR 4701P 128
SCAR 4711 130
SCAR 4731 130
SCAR 4735 130
SCAR 4735EU 131
SCAR 4761 130
SCAR 4765 130
SCAR 4765EU 131
SCAR 4771 128
SCAR 4771D 128
SCAR 4771P 128
SCAR 4775 130
SCAR 4775EU 131
SCAR 4781 128
SCAR 4781D 128
SCAR 4781P 128
SCAR 4811 130
SCAR 4831 130
SCAR 4835 130
SCAR 4835EU 131
SCAR 4861 130
SCAR 4865 130
SCAR 4865EU 131
SCAR 4875 130
SCAR 4875EU 131
SCAR 6711 128
SCAR 6711D 128
SCAR 6711P 128
SCAR 6731 128
SCAR 6731D 128
SCAR 6731P 128
SCAR 7201 128
SCAR 7201D 128
SCAR 7201P 128
SCAR 7211 129
SCAR 7211P 129
SCAR 7231 128
SCAR 7231D 128
SCAR 7231P 128
SCAR 7241 129
SCAR 7241P 129
SCAR 7251 128
SCAR 7251D 128
SCAR 7251P 128
SCAR 7252 129
SCAR 7252P 129
SCAR 7261 129
SCAR 7261P 129
SCAR 7271 128
SCAR 7271D 128
SCAR 7271P 128
SCAR 7281 128
SCAR 7281D 128
SCAR 7281P 128
SCAR 7291 129
SCAR 7291P 129
SCAR 7401 128
SCAR 7401D 128
SCAR 7401P 128
SCAR 7411 129
SCAR 7411P 129
SCAR 7431 128
SCAR 7431D 128
SCAR 7431P 128
SCAR 7441 129
SCAR 7441P 129
SCAR 7451 128
SCAR 7451D 128
SCAR 7451P 128
SCAR 7452 129
SCAR 7452P 129
SCAR 7461 129
SCAR 7461P 129
SCAR 7471 128
SCAR 7471D 128
SCAR 7471P 128
SCAR 7481 128
SCAR 7481D 128
SCAR 7481P 128
SCAR 7491 129
SCAR 7491P 129
SCAR 7701 128
SCAR 7701D 128
SCAR 7701P 128
SCAR 7711 129
SCAR 7711P 129
SCAR 7731 128
SCAR 7731D 128
SCAR 7731P 128
SCAR 7741 129
SCAR 7741P 129
SCAR 7751 128
SCAR 7751D 128
SCAR 7751P 128
SCAR 7752 129
SCAR 7752P 129
SCAR 7761 129
SCAR 7761P 129
SCAR 7771 128
SCAR 7771D 128
SCAR 7771P 128
SCAR 7781 128
SCAR 7781D 128
SCAR 7781P 128
SCAR 7791 129
SCAR 7791P 129
SCAR 8211 129
SCAR 8211D 129
SCAR 8211P 129

SCAR 8231 129
SCAR 8231D 129
SCAR 8231P 129
SCAR 8251 129
SCAR 8251D 129
SCAR 8251P 129
SCAR 8271 129
SCAR 8271D 129
SCAR 8271P 129
SCAR 8281 129
SCAR 8281D 129
SCAR 8281P 129
SCAR 8411 129
SCAR 8411D 129
SCAR 8411P 129
SCAR 8431 129
SCAR 8431D 129
SCAR 8431P 129
SCAR 8451 129
SCAR 8451D 129
SCAR 8451P 129
SCAR 8471 129
SCAR 8471D 129
SCAR 8471P 129
SCAR 8481 129
SCAR 8481D 129
SCAR 8481P 129
SCAR 8711 129
SCAR 8711D 129
SCAR 8711P 129
SCAR 8731 129
SCAR 8731D 129
SCAR 8731P 129
SCAR 8751 129
SCAR 8751D 129
SCAR 8751P 129
SCAR 8771 129
SCAR 8771D 129
SCAR 8771P 129
SCAR 8781 129
SCAR 8781D 129
SCAR 8781P 129
SCAR 9211 130
SCAR 9211P 130
SCAR 9231 130
SCAR 9231P 130
SCAR 9251 130
SCAR 9251P 130
SCAR 9271 130
SCAR 9271P 130
SCAR 9281 130
SCAR 9281P 130
SCAR 9411 130
SCAR 9411P 130
SCAR 9431 130
SCAR 9431P 130
SCAR 9451 130
SCAR 9451P 130
SCAR 9471 130
SCAR 9471P 130
SCAR 9481 130
SCAR 9481P 130
SCAR 9711 130
SCAR 9711P 130
SCAR 9731 130
SCAR 9731P 130
SCAR 9751 130
SCAR 9751P 130
SCAR 9771 130
SCAR 9771P 130
SCAR 9781 130
SCAR 9781P 130
SCLEBI 5330D IVO 124
SCLEBI 5330D OAK 124
SCLEBI 5330D SAD 124
SCLEBI 5330D TAB 124
SCLEBI 5330 IVO 124
SCLEBI 5330 OAK 124
SCLEBI 5330P IVO 124
SCLEBI 5330P OAK 124
SCLEBI 5330P SAD 124
SCLEBI 5330P TAB 124
SCLEBI 5330 SAD 124
SCLEBI 5330 TAB 124
SCLEBI 5331P IVO 125
SCLEBI 5331P OAK 125
SCLEBI 5331P SAD 125
SCLEBI 5331P TAB 125
SCLEBI 5440D IVO 124
SCLEBI 5440D OAK 124
SCLEBI 5440D SAD 124
SCLEBI 5440D TAB 124
SCLEBI 5440 IVO 124
SCLEBI 5440 OAK 124
SCLEBI 5440P IVO 124
SCLEBI 5440P OAK 124
SCLEBI 5440P SAD 124
SCLEBI 5440P TAB 124
SCLEBI 5440 SAD 124
SCLEBI 5440 TAB 124
SCLEBI 5441P IVO 125
SCLEBI 5441P OAK 125
SCLEBI 5441P SAD 125
SCLEBI 5441P TAB 125
SCLEBI 5770D IVO 124
SCLEBI 5770D OAK 124
SCLEBI 5770D SAD 124
SCLEBI 5770D TAB 124
SCLEBI 5770 IVO 124
SCLEBI 5770 OAK 124
SCLEBI 5770P IVO 124
SCLEBI 5770P OAK 124
SCLEBI 5770P SAD 124
SCLEBI 5770P TAB 124
SCLEBI 5770 SAD 124
SCLEBI 5770 TAB 124
SCLEBI 5771P IVO 125
SCLEBI 5771P OAK 125
SCLEBI 5771P SAD 125
SCLEBI 5771P TAB 125
SCLEBI 5990D IVO 124
SCLEBI 5990D OAK 124
SCLEBI 5990D SAD 124
SCLEBI 5990D TAB 124
SCLEBI 5990 IVO 124
SCLEBI 5990 OAK 124
SCLEBI 5990P IVO 124
SCLEBI 5990P OAK 124
SCLEBI 5990P SAD 124
SCLEBI 5990P TAB 124
SCLEBI 5990 SAD 124
SCLEBI 5990 TAB 124
SCLEBI 5991P IVO 125
SCLEBI 5991P OAK 125
SCLEBI 5991P SAD 125
SCLEBI 5991P TAB 125
SCLEBU 5330 IVO 126
SCLEBU 5330 OAK 126
SCLEBU 5330 SAD 126
SCLEBU 5330 TAB 126
SCLEBU 5331 IVO 127
SCLEBU 5331 OAK 127
SCLEBU 5331 SAD 127
SCLEBU 5331 TAB 127
SCLEBU 5440 IVO 126
SCLEBU 5440 OAK 126
SCLEBU 5440 SAD 126
SCLEBU 5440 TAB 126
SCLEBU 5441 IVO 127
SCLEBU 5441 OAK 127
SCLEBU 5441 SAD 127
SCLEBU 5441 TAB 127
SCLEBU 5770 IVO 126
SCLEBU 5770 OAK 126
SCLEBU 5770 SAD 126
SCLEBU 5770 TAB 126
SCLEBU 5771 IVO 127
SCLEBU 5771 OAK 127
SCLEBU 5771 SAD 127
SCLEBU 5771 TAB 127
SCLEBU 5990 IVO 126
SCLEBU 5990 OAK 126
SCLEBU 5990 SAD 126
SCLEBU 5990 TAB 126
SCLEBU 5991 IVO 127
SCLEBU 5991 OAK 127
SCLEBU 5991 SAD 127
SCLEBU 5991 TAB 127
SCLI 3501 132
SCLI 3501EU 133
SCLI 3502 132
SCLI 3502EU 133
SCLI 3507 132
SCLI 3507EU 133
SCLI 5001 132
SCLI 5001EU 133
SCLI 5002 132
SCLI 5002EU 133
SCLI 5007 132
SCLI 5007EU 133
SCLI 7501 132
SCLI 7501P 132
SCLI 7531 131
SCLI 7531D 131
SCLI 7531P 131
SCLI 7561 132
SCLI 7561P 132
SCLI 7571 131
SCLI 7571D 131
SCLI 7571P 131
SCLI 7581 131
SCLI 7581D 131
SCLI 7581P 131
SCLI 7591 132
SCLI 7591P 132
SCLIU 5001 133
SCLIU 5002 133
SCLIU 5007 133
SIPR 1601 134
SIPR 1602 134
SIPR 1607 134
SIPR 2101 134
SIPR 2102 134
SIPR 2107 134
SIPR 2111 134
SIPR 2112 134
SIPR 2117 134
SIPR 2121 135
SIPR 2122 135
SIPR 2127 135
SIPR 2131 135
SIPR 2132 135
SIPR 2137 135
SIPR 2141 135
SIPR 2142 135
SIPR 2147 135
SIPR 2601 134
SIPR 2602 134
SIPR 2607 134
SIPR 2611 134
SIPR 2612 134
SIPR 2617 134
SIPR 2621 135
SIPR 2622 135
SIPR 2627 135
SIPR 2631 135
SIPR 2632 135
SIPR 2637 135
SIPR 2641 135
SIPR 2642 135
SIPR 2647 135
SISU 1601 196
SISU 1602 196
SISU 1607 196
SISU 2101 196
SISU 2102 196
SISU 2107 196
SISU 2111 196
SISU 2112 196
SISU 2117 196
SISU 2121 196
SISU 2122 196
SISU 2127 196
SISU 2131 197
SISU 2132 197
SISU 2137 197
SISU 2141 197
SISU 2142 197
SISU 2147 197
SISU 2601 196
SISU 2602 196
SISU 2607 196
SISU 2611 196
SISU 2612 196
SISU 2617 196
SISU 2621 196
SISU 2622 196
SISU 2627 196
SISU 2631 197
SISU 2632 197
SISU 2637 197
SISU 2641 197
SISU 2642 197
SISU 2647 197
STEP 1001 199
STEP 1001 218
STEP 1001H 199
STEP 1002 199
STEP 1002 218
STEP 1002H 199
STEP 1007 199
STEP 1007 218
STEP 1007H 199
STEP 1008 199
STEP 1008 218
STEP 1008H 199
STEP 1009 199
STEP 1009 218
STEP 1009H 199
STIN 1001 19
STIN 1001H 19
STIN 1002 19
STIN 1002H 19
STIN 1007 19
STIN 1007H 19
STIN 1008 19
STIN 1008H 19
STIN 1009 19
STIN 1009H 19
STUP 1001 19
STUP 1001H 19
STUP 1002 19
STUP 1002H 19
STUP 1007 19
STUP 1007H 19
STUP 1008 19
STUP 1008H 19
STUP 1009 19
STUP 1009H 19
TH3N 12223 17
TH3N 12223H 17
TH3N 17223 17
TH3N 17223H 17
TH3N 18223 17
TH3N 18223H 17
TH3N 19223 17
TH3N 19223H 17
TH3N 22223 17
TH3N 22223H 17
TH3N 27223 17
TH3N 27223H 17
TH3N 28223 17
TH3N 28223H 17
TH3N 29223 17
TH3N 29223H 17
THC 12223 16
THC 12223H 16
THC 17223 16
THC 17223H 16
THC 18223 16
THC 18223H 16
THC 19223 16
THC 19223H 16
THC 22223 18
THC 22223H 18
THC 27223 18
THC 27223H 18
THC 28223 18
THC 28223H 18
THC 29223 18
THC 29223H 18
THF AU 12H 9
THF AU 17H 9
THF AU 18H 9
THF AU 19H 9
THF AU 22H 9
THF AU 27H 9
THF AU 28H 9
THF AU 29H 9
THF EU 12H 9
THF EU 17H 9
THF EU 18H 9
THF EU 19H 9
THF EU 22H 9
THF EU 27H 9
THF EU 28H 9
THF EU 29H 9
THF UK 12H 9
THF UK 17H 9
THF UK 18H 9
THF UK 19H 9
THF UK 22H 9
THF UK 27H 9
THF UK 28H 9
THF UK 29H 9
THF US 12H 9
THF US 17H 9
THF US 18H 9
THF US 19H 9
THF US 22H 9
THF US 27H 9
THF US 28H 9
THF US 29H 9
THH 22223 100
THH 22223H 100
THH 27223 100
THH 27223H 100
THH 28223 100
THH 28223H 100
THH 29223 100
THH 29223H 100
THIN 12223 16
THIN 12223H 16
THIN 17223 16
THIN 17223H 16
THIN 18223 16
THIN 18223H 16
THIN 19223 16
THIN 19223H 16
THIN 22223 16
THIN 22223H 16
THIN 27223 16
THIN 27223H 16

THIN 28223H 16
THIN 29223 16
THIN 29223H 16
THP 22223 18
THP 22223H 18
THP 27223 18
THP 27223H 18
THP 28223 18
THP 28223H 18
THP 29223 18
THP 29223H 18
THR 22223 100
THR 22223H 100
THR 27223 100
THR 27223H 100
THR 28223 100
THR 28223H 100
THR 29223 100
THR 29223H 100
THW 12223 98
THW 12223H 98
THW 17223 98
THW 17223H 98
THW 18223 98
THW 18223H 98
THW 19223 98
THW 19223H 98
THWP AU 12 98
THWP AU 12H 98
THWP AU 17 98
THWP AU 17H 98
THWP AU 18 98
THWP AU 18H 98
THWP AU 19 98
THWP AU 19H 98
THWP EU 12 98
THWP EU 12H 98
THWP EU 17 98
THWP EU 17H 98
THWP EU 18 98
THWP EU 18H 98
THWP EU 19 98
THWP EU 19H 98
THWP UK 12 98
THWP UK 12H 98
THWP UK 17 98
THWP UK 17H 98
THWP UK 18 98
THWP UK 18H 98
THWP UK 19 98
THWP UK 19H 98
THWP US 12 98
THWP US 12H 98
THWP US 17 98
THWP US 17H 98
THWP US 18 98
THWP US 18H 98
THWP US 19 98
THWP US 19H 98
TPC+ 0001 246
TPC+ 0001 249
TPC+ 0002 246
TPC+ 0002 249
TPCC 0901 244
TPCC 0902 244
TPCE 0901 245
TPCE 0901 248
TPCE 0902 245
TPCE 0902 248
TPCI 0901 245
TPCI 0901 248
TPCI 0902 245
TPCI 0902 248
TPCM 1001 244
TPCM 1002 244
TPCM 2001 244
TPCM 2002 244
TPCO 1001 246
TPCO 1001 249
TPCO 1001 251
TPCO 1002 246
TPCO 1002 249
TPCO 1002 251
TPCO 2001 246
TPCO 2001 249
TPCO 2001 251
TPCO 2002 246
TPCO 2002 249
TPCO 2002 251
TPCT 0001 246
TPCT 0001 249
TPCT 0002 246
TPCT 0002 249
TPEC 1801 245
TPEC 1802 245
TPEF 0001 245
TPEF 0001 248
TPEF 0002 245
TPEF 0002 248
TPEP 2001 246
TPEP 2001 249
TPEP 2002 246
TPEP 2002 249
TPOP 2001 246
TPOP 2001 249
TPOP 2002 246
TPOP 2002 249
TPPL 1001 245
TPPL 1001 247
TPPL 1001 250
TPPL 1002 245
TPPL 1002 247
TPPL 1002 250
TPPR 1001 245
TPPR 1001 247
TPPR 1001 250
TPPR 1002 245
TPPR 1002 247
TPPR 1002 250
TPREC 1801 251
TPREC 1802 251
TPREF 0002 251
TPREP 0002 251
TPRI 1002 250
TPRI 2002 250
TPSC 1801 248
TPSC 1802 248
TPSP 1001 247
TPSP 1002 247
TPSP 2001 247
TPSP 2002 247
TW3N 12223 99
TW3N 12223H 99
TW3N 17223 99
TW3N 17223H 99
TW3N 18223 99
TW3N 18223H 99
TW3N 19223 99
TW3N 19223H 99
TWIN 12223 99
TWIN 12223H 99
TWIN 17223 99
TWIN 17223H 99
TWIN 18223 99
TWIN 18223H 99
TWIN 19223 99
TWIN 19223H 99


Colours

MATERIAL FINISH COLOUR


ALUMINIUM TEXTURED BLACK



ALUMINIUM TEXTURED WHITE



ALUMINIUM MATT BLACK


ALUMINIUM MATT WHITE

MATERIAL FINISH COLOUR


ALUMINIUM VARNISHED ALUMINIUM


ALUMINIUM GOLD


ALUMINIUM CHROME


ALUMINIUM GREY


ALUMINIUM BRONZE


ALUMINIUM BRONZE

MATERIAL FINISH COLOUR



BRASS VARNISHED BRASS


BRASS VARNISHED BRONZE



BRASS VARNISHED GUNMETAL


BRASS VARNISHED NICKEL


MATERIAL FINISH COLOUR



COPPER VARNISHED COPPER

MATERIAL COLOUR


GLASS TRANSPARANT


GLASS SANDBLASTED/MATT


GLASS FROSTED


PMMA

MATERIAL COLOUR


LEATHER BLACK



LEATHER TABACCO


LEATHER SADDLE


LEATHER OAK


LEATHER IVORY

MATERIAL COLOUR


SILICON WHITE


SILICON BLACK


SILICON BRONZE

Aluminium: brushed and polyvarnished.
Gunmetal & Bronze: oxidation treatment on the surface of brass and then brushed and polyvarnished.
Nickel: brushed on the surface of brass and then nickel electroplated finished.

Please note that colours may vary from those shown on this page.

Glossary

	ENGLISH	FRANÇAIS	NEDERLANDS	DEUTSCH
CE	CE standard	norme CE	CE norm	CE Standard
⏚	fixture class 1	appareil classe 1	toestel klasse 1	Gerät Klasse 1
⧈	fixture class 2	appareil classe 2	toestel klasse 2	Gerät Klasse 2
⧫	fixture class 3	appareil classe 3	toestel klasse 3	Gerät Klasse 3
IP	protection level	indice de protection	beschermingsindicatie	Schutzklasse
◆	beam	rayon de lumière	lichtbundel	lichtbündel
▲	upper beam	rayon de lumière supérieur	bovenste lichtbundel	lichtbündel oben
▼	lower beam	rayon de lumière inférieur	onderste lichtbundel	lichtbündel unter
◄	left beam	rayon de lumière à gauche	linker lichtbundel	lichtbündel links
►	right beam	rayon de lumière à droite	rechter lichtbundel	lichtbündel rechts
+B	with base	avec base	met basis	mit Sockel
D+B	driver with base	convertisseur avec base	voeding met basis	Konverter mit Sockel
	1 lighting side	1 face lumineuse	1 zijde verlicht	1 Seite Beleuchtung
	2 lighting sides	2 faces lumineuses	2 zijden verlicht	2 Seiten Beleuchtung
	adjustable	orientable	richtbaar	Schwenkbar
mm	dimensions in mm	dimensions en mm	afmetingen in mm	Abmessungen in mm
W/C	wall or ceiling	applique ou plafonnier	wand of plafond	Wand oder Decke
L	length	longueur	lengte	Länge
W	width	largeur	breedte	Breite
H	height	hauteur	hoogte	Höhe
NO	non-dimmable	non dimmable	niet-dimbaar	nicht dimmbar
1-10	1-10V dimmable	1-10V dimmable	1-10V dimbaar	1-10V dimmbar
PU	PUSH-DIM dimmable	PUSH-DIM dimmable	PUSH-DIM dimbaar	PUSH-DIM dimmbar
DA	Dali dimmable	Dali dimmable	Dali dimbaar	Dali dimmbar
LC	TRIAC/IGBT dimmable	TRIAC/IGBT dimmable	TRIAC/IGBT dimbaar	TRIAC/IGBT dimmbar
RS 16	short rod 160mm	tige courte 160mm	korte stang 160mm	kurze Stange 160mm
RL 79	long rod 790mm	tige longue 790mm	lange stang 790mm	lange Stange 790mm
RF 75	fixed rod 750 mm	tige fixe 750 mm	vaste stang 750 mm	feste Stange 750 mm
RF 100	fixed rod 1000 mm	tige fixe 1000 mm	vaste stang 1000 mm	feste Stange 1000 mm

Trizo21 I Kerrebroek 52 I B-9850 Deinze I Belgium
T +32 (0)9 380 43 43
E INFO@TRIZO21.COM
W WWW.TRIZO21.COM
W WWW.ELEMENTS-CONFIGURATOR.TRIZO21.COM
INSTAGRAM.COM/TRIZO21
FACEBOOK.COM/TRIZO21

All models I Copyright ©Trizo21 & Bruno Van Meenen
All products I Handmade in Belgium
Pricelist I 06.2025

retail prices in euro, VAT excl.

Important notice:
For warranty use only Trizo21® supplied LED drivers as mentioned.
No warranty when used without the supplied LED drivers!

All information in this pricelist is without engagement, replaces all preceding information and can always be modified.
Trizo21 bvba has the right to change the technical aspects of its products at any time without prior notice.
All our product carry the CE logo. The CE logo represents an implicit quality assurance.
For further technical information, please visit WWW.TRIZO21.COM
All products are supplied without bulbs and/or drivers, unless stated otherwise.
All dimensions are expressed in mm.
No part of this book may be reproduced without written authorisation of Trizo21 bvba.

Kerrebroek 52 | B-9850 Deinze | Belgium | +32 (0)9 380 43 43
info@trizo21.com | www.trizo21.com © Trizo21