

DESCRIPTION

The Beak Suspension's adjustable cylinder directs and projects a beam of direct light. Its smooth, burnished brass finish is accented by knurling on the head, adding visual rhythm to the structure. Supported by a central rod that lends verticality to the composition, Beak Suspension is available in both a standard and Flat version with a reduced-thickness canopy. The Beak collection also includes ceiling, reading, picture, wall, floor, and table models.

PRODUCTS DETAILS

FUNCTION	SUSPENSION
LOCATION	INTERIOR
LIGHT EMISSION	DIRECTIONAL LIGHT
LIGHT SOURCE	COB LED CLU703 6W 724lm 700mA 9V CRI90 2700°K
ENERGY EFFICIENCY	F
RATED VOLTAGE	110 - 120 V / 220 - 240 V
FREQUENCY	50 - 60Hz
SUPPLY	**BEAK SUSPENSION** TERMINAL BLOCK **BEAK SUSPENSION FLAT** REMOTE TERMINAL BLOCK
LENS SPOT BEAM	18° - 36° - 60°

BEAK SUSPENSION: DALI or TRIAC dimming kit available upon request.
BEAK SUSPENSION FLAT: DALI or TRIAC remote dimming kit available upon request.

CERTIFICATION

UL WIRED / CE / IP20

MATERIALS

STRUCTURE

M11	LIGHT BURNISHED BRASS
M12	DARK BURNISHED BRASS


PACKAGE

QTY	DIMENSIONS	NET WEIGHT	GROSS WEIGHT	TOTAL VOL.
1 × BOX	121 × 22 × H 23 cm (47”6 × 9” × 42”6)	1,4 kg	2,7 kg	0,06 m^3


DIMENSIONS

BEAK SUSPENSION

STANDARD

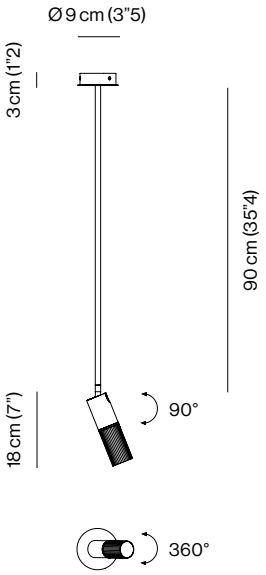


NORTH AMERICAN WALL PLATE

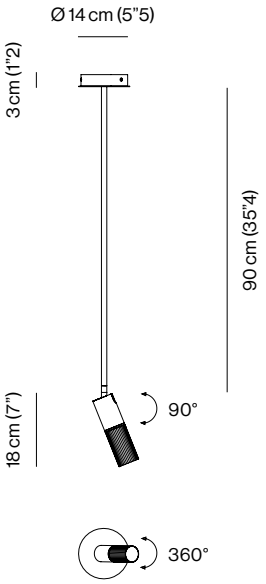

BEAK SUSPENSION FLAT

STANDARD

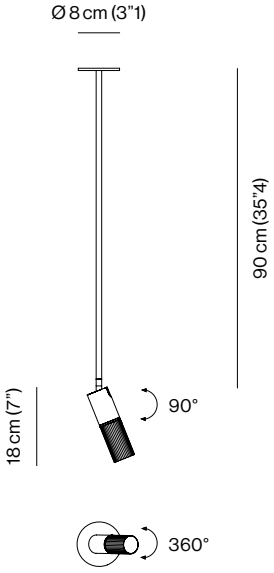

NORTH AMERICAN WALL PLATE

