

DESCRIPTION

The suspended structure's rigorous profiles are delineated by light that, filtering through the micro-holes, creates a quiet atmosphere. Urban Lighline Supension's light burnished brass core is located within a micro-perforated matte black or gold metal lampshade, which shields the light. Urban Lightline is also available in a wall version.

PRODUCTS DETAILS

FUNCTION	SUSPENSION
LOCATION	INTERIOR
LIGHT EMISSION	DIRECT AND INDIRECT LIGHT
LIGHT SOURCE	STRIP LED 16,8W/m 2700°K 1900lm/m CRI 90 24Vdc TOT. = 49W 5510lm
ENERGY EFFICIENCY	C
RATED VOLTAGE	110 - 120V / 220 - 240V
FREQUENCY	50 - 60Hz
SUPPLY	TERMINAL BLOCK
BALLAST	BALLAST INCLUDED
WIRING CABLE LENGTH	250 cm (98"4)
STEEL CABLE LENGTH	250 cm (98"4)

DALI or TRIAC dimming kit available upon request.
Flat Canopy available upon request.

CERTIFICATION

UL WIRED / CE IP20


MATERIALS

STRUCTURE
M11 + MB LIGHT BURNISHED BRASS + MATTE BLACK

PACKAGE

QTY	DIMENSIONS	NET WEIGHT	GROSS WEIGHT	TOTAL VOL.
1 × BOX	180 × 36 × H 27 cm (70"9 × 14"2 × H 10"6)	6 kg	8 kg	0,17 m^3

DIMENSIONS

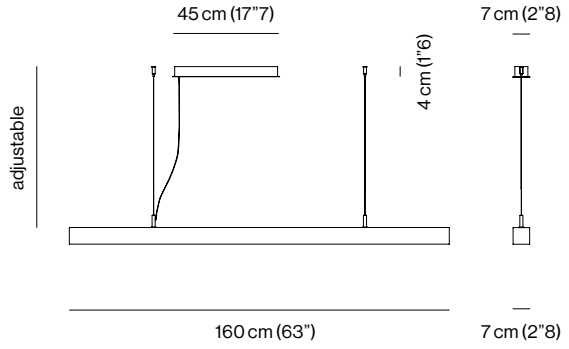

NORTH AMERICAN WALL PLATE

