

DESCRIPTION

The wall structure's rigorous profiles are delineated by light that, filtering through the micro-holes, creates a quiet atmosphere. Urban Lighline Supension's light burnished brass core is located within a micro-perforated matte black or gold metal lampshade, which shields the light. Urban Lightline is also available in a suspended version.

PRODUCTS DETAILS

FUNCTION	WALL
LOCATION	INTERIOR
LIGHT EMISSION	DIRECT AND INDIRECT LIGHT
LIGHT SOURCE	STRIP LED 16,8W/m 2700°K 1900lm/m CRI 90 24Vdc TOT. = 12W 1368lm
ENERGY EFFICIENCY	C
RATED VOLTAGE	110 - 120V / 220 - 240V
FREQUENCY	50 - 60Hz
SUPPLY	TERMINAL BLOCK
BALLAST	BALLAST INCLUDED

DALI or TRIAC dimming kit available upon request.

CERTIFICATION

UL WIRED / CE IP20


MATERIALS

STRUCTURE
M11 + MB LIGHT BURNISHED BRASS + MATTE BLACK

PACKAGE

QTY	DIMENSIONS	NET WEIGHT	GROSS WEIGHT	TOTAL VOL.
1 × BOX	97 × 35 × H 37 cm (38"2 × 13"8 × H 14"6)	4 kg	6 kg	0,13 m³

DIMENSIONS

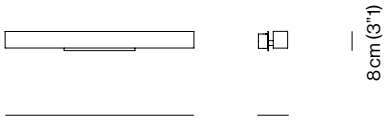

NORTH AMERICAN WALL PLATE

