Linear

Bet DL1645

Linear luminaire




Linear luminaire. 10 W. 90° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø143 mm
- LED source: Citizen

Power **10 W**	Voltage **max 32 V**	Luminous flux **960 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **90°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

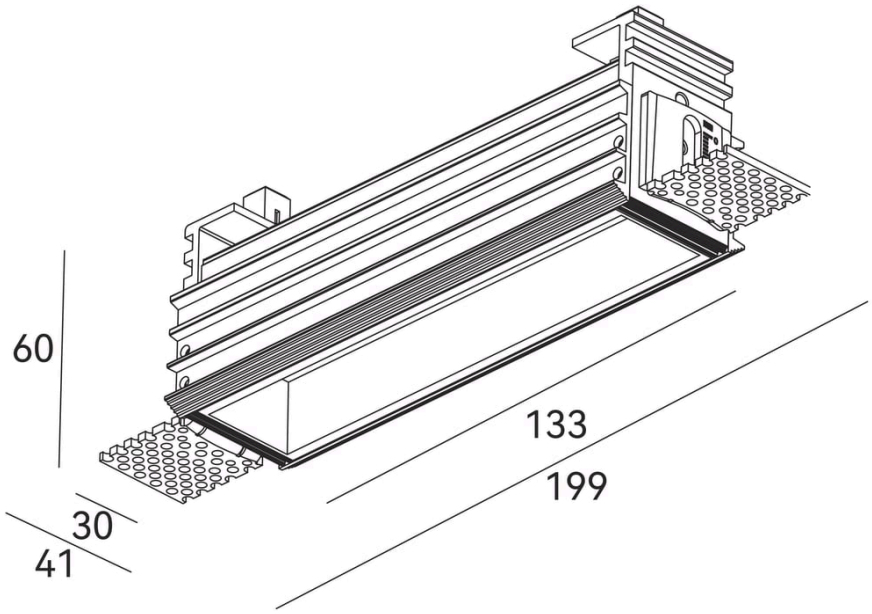



143×42mm


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1645	10 W	max 32 V	960 lm	97 CRI	L199 x W41 x H60 mm	Ø143 mm	90°	300 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1645, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1645, 10 W, 90° beam

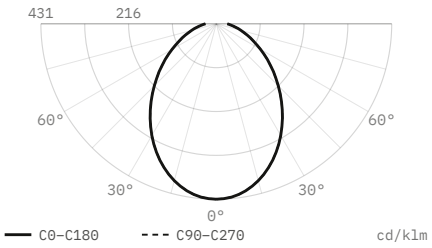

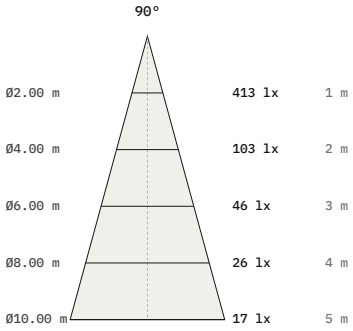

Luminous flux	**960 lm**
Efficacy	**96 lm/W**
Peak intensity	**413 cd, 431 cd/klm**
Beam angle (50%)	**90°**
Field angle (10%)	**164°**
Cut-off angle (2.5%)	**90°**
Flux 0–30° / 30–60° / 60–90°	**31.2 / 48 / 20.8 %**
Size	**199 × 41 × 60 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.