Magnetic 23 mm system

CX-9142

23 mm pendant

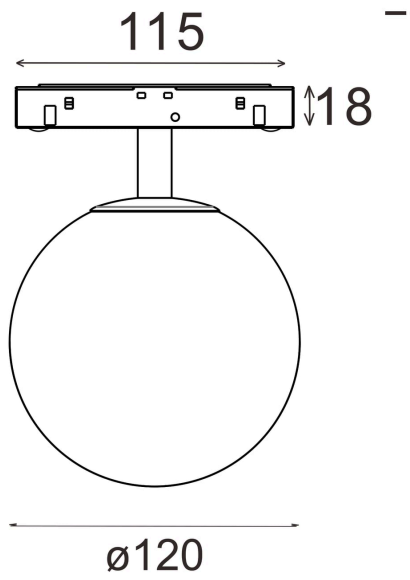


Pendant for the 23 mm magnetic track. 6 W. 2700, 3000, 3500, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power **6 W**	Voltage **48 V**	Luminous flux **500 lm**
Colour temperature **2700 K, 3000 K, 3500 K, 4000 K**	CRI **97 CRI**	IP rating **IP20**
Certifications **RoHS, CB, CE**	Mounting **Suspended, Magnetic track**	Control **DALI, 0-10V, Bluetooth, Casambi**
Finishes **White, Black, Grey**		

Dimensions



Models

Code	Power	Voltage	Flux	CRI	Size
CX-9142	6 W	48 V	500 lm	97 CRI	Ø120 mm; adapter 115 × 18 mm

Finishes


Black

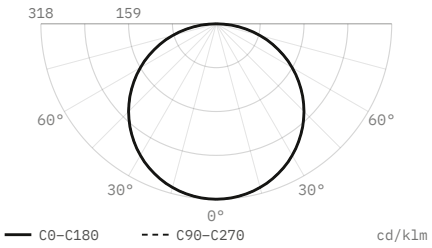

White

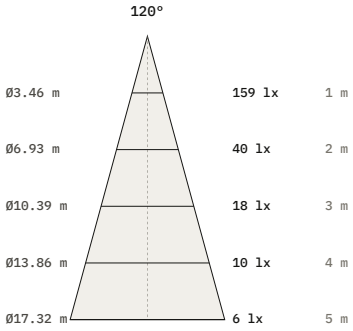

Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CX-9142, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CX-9142, 6 W, wide distribution





Luminous flux	**500 lm**
Efficacy	**83 lm/W**
Peak intensity	**159 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø120 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.