Magnetic 23 mm system

CX-9150

23 mm spotlight

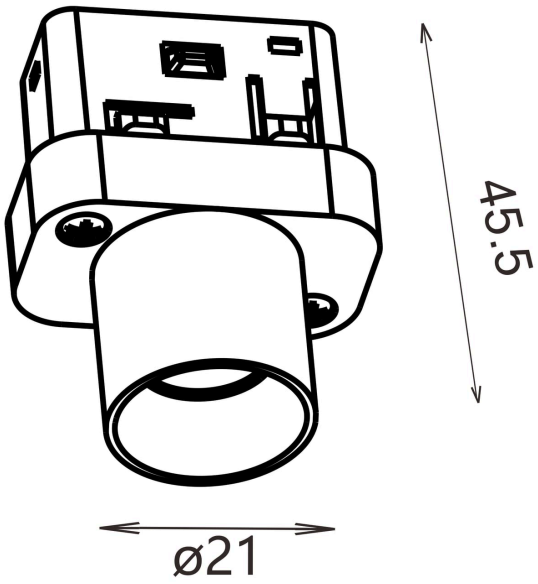


Spotlight for the 23 mm magnetic track. 2 W. 20° beam. 2700, 3000, 3500, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power **2 W**	Voltage **48 V**	Luminous flux **160 lm**
Colour temperature **2700 K, 3000 K, 3500 K, 4000 K**	CRI **97 CRI**	Beam angles **20°**
IP rating **IP20**	Certifications **RoHS, CB, CE**	Mounting **Magnetic track**
Control **DALI, 0-10V, Bluetooth, Casambi**	Finishes **White, Black, Grey**	

Dimensions



Models

Code	Power	Voltage	Flux	CRI	Size	Beam
CX-9150	2 W	48 V	160 lm	97 CRI	Ø21, H45.5 mm	20°

Finishes


Black

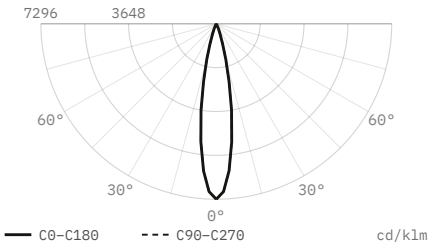

White

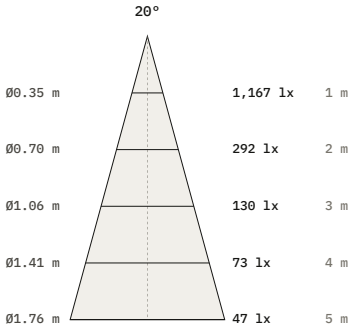

Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CX-9150, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CX-9150, 2 W, 20° beam





Luminous flux	**160 lm**
Efficacy	**80 lm/W**
Peak intensity	**1,167 cd, 7,296 cd/klm**
Beam angle (50%)	**20°**
Field angle (10%)	**36.5°**
Cut-off angle (2.5%)	**23°**
Flux 0–30° / 30–60° / 60–90°	**99.8 / 0.2 / 0 %**
Size	**Ø21 × 45.5 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.