
Outdoor

Deck DL1396

Outdoor luminaire

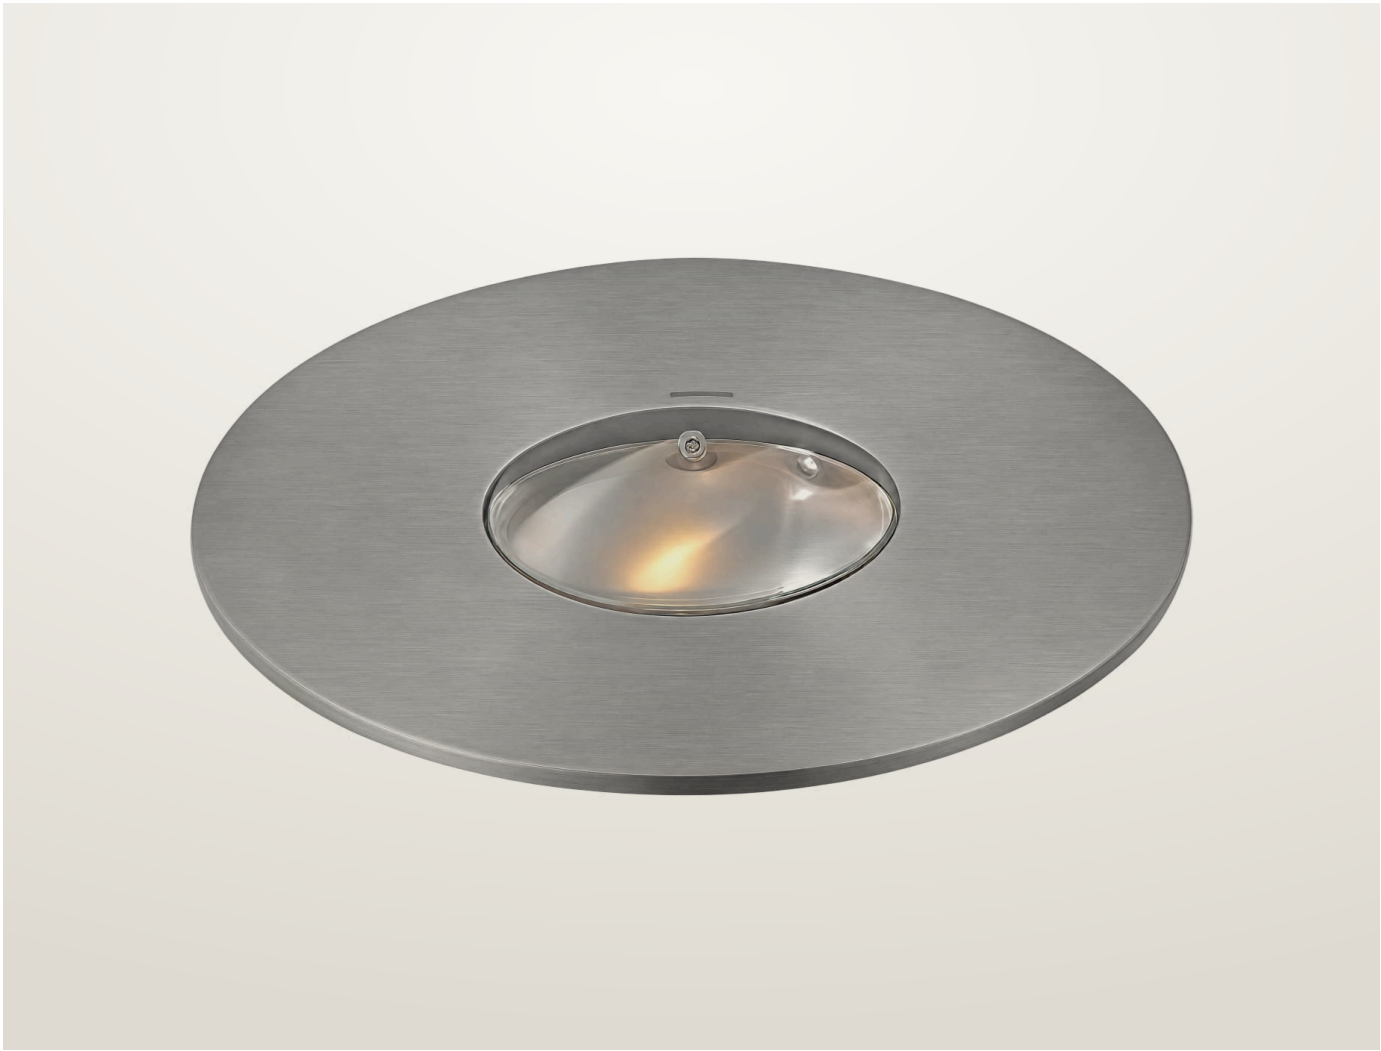

Outdoor luminaire. 2 W. 30° beam. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø34 mm
- LED source: Citizen

Power **2 W**	Voltage **max 3 V**	Luminous flux **160 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **30°**
IP rating **IP67**	Certifications **CE**	Mounting **Recessed, Wall**
Finishes **Black**		


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1396	2 W	max 3 V	160 lm	97 CRI	Ø37 x H51 mm	Ø34 mm	30°	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1396, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1396, 2 W, 30° beam

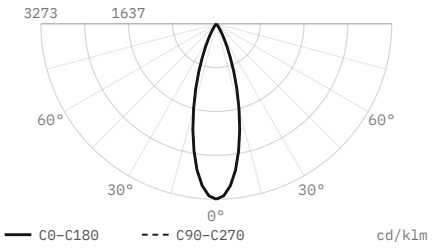

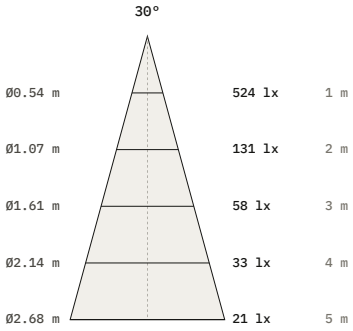

Luminous flux	**160 lm**
Efficacy	**80 lm/W**
Peak intensity	**524 cd, 3,273 cd/klm**
Beam angle (50%)	**30°**
Field angle (10%)	**54.7°**
Cut-off angle (2.5%)	**34.5°**
Flux 0–30° / 30–60° / 60–90°	**94 / 6 / 0 %**
Size	**Ø37 × 51 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.