Outdoor

Deck DL1484

Outdoor luminaire



Outdoor luminaire. 3 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø49 mm
- LED source: Citizen

Power **3 W**	Voltage **max 10 V**	Luminous flux **270 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 60°**
IP rating **IP67**	Certifications **CE**	Mounting **Recessed, Wall**
Finishes **Black**		


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1484	3 W	max 10 V	270 lm	97 CRI	Ø62 x H57 mm	Ø49 mm	15° 24° 36° 60°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1484, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1484, 3 W, 15° beam

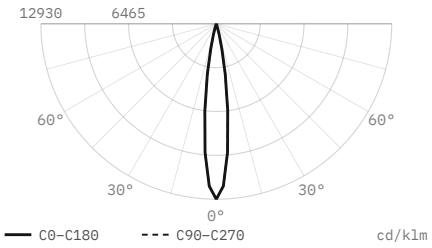


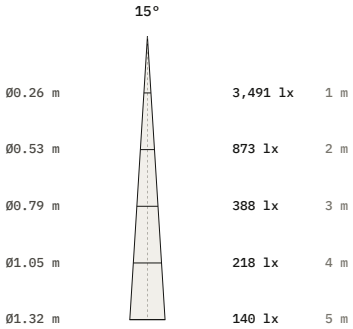

Luminous flux	270 lm
Efficacy	90 lm/W
Peak intensity	3,491 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø62 × 57 mm
Data	Calculated from catalogue data


DL1484, 3 W, 24° beam

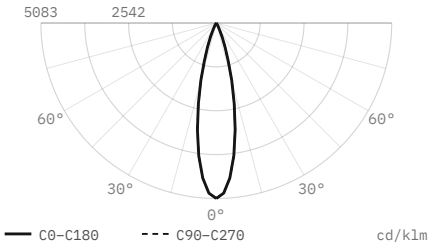


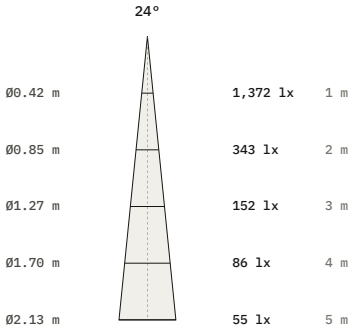

Luminous flux	270 lm
Efficacy	90 lm/W
Peak intensity	1,372 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø62 × 57 mm
Data	Calculated from catalogue data


DL1484, 3 W, 36° beam

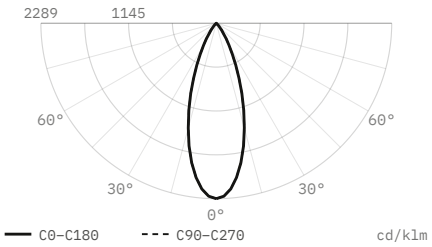


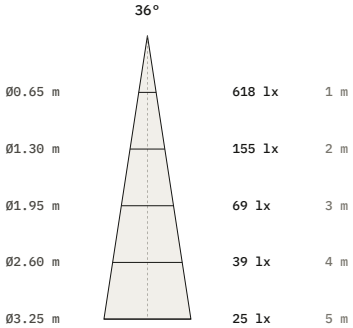

Luminous flux	270 lm
Efficacy	90 lm/W
Peak intensity	618 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø62 × 57 mm
Data	Calculated from catalogue data

DL1484, 3 W, 60° beam

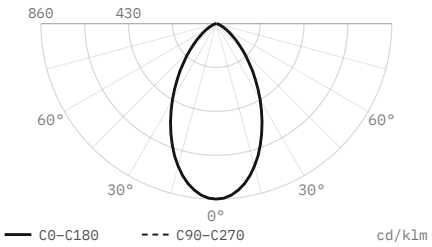

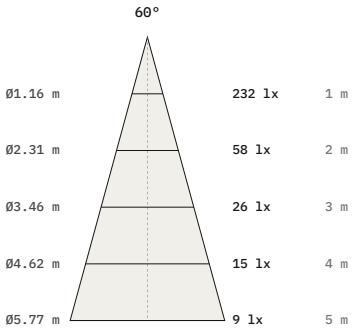

Luminous flux	270 lm
Efficacy	90 lm/W
Peak intensity	232 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø62 × 57 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.