Floor Lamps

Mobile ML0005

Floor lamp



Floor lamp. 10 W. 75° beam. 2700, 3000, 4000 K. 97 CRI.


- LED source: Citizen

Power	Voltage	Luminous flux
10 W	230 V AC	800 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	75°
IP rating	**Certifications**	**Mounting**
IP20	CE	Floor

Finishes

Black

Dimensions

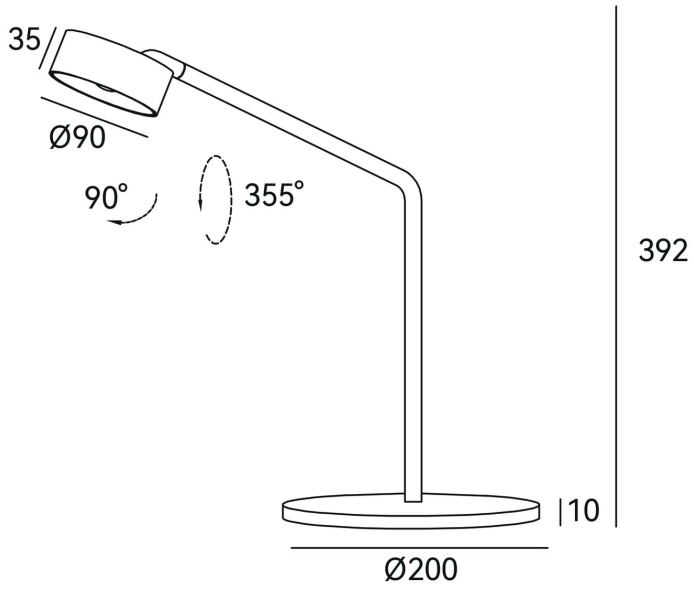


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
ML0005	10 W	230 V AC	800 lm	97 CRI	H392 mm; head Ø90 × 35 mm; base Ø200 × 10 mm	75°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0005, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

ML0005, 10 W, 75° beam

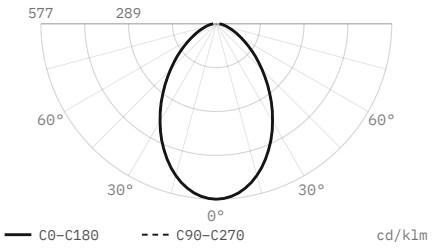

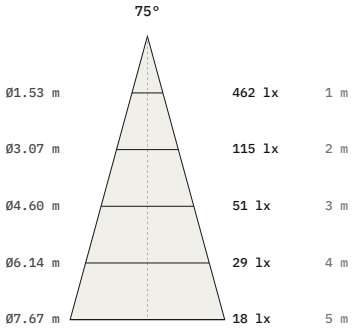

Luminous flux	**800 lm**
Efficacy	**80 lm/W**
Peak intensity	**462 cd, 577 cd/klm**
Beam angle (50%)	**75°**
Field angle (10%)	**136.7°**
Cut-off angle (2.5%)	**86.5°**
Flux 0–30° / 30–60° / 60–90°	**39.3 / 47.8 / 12.9 %**
Size	**392 × 0 × 392 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.