
Floor Lamps

Mobile ML0018

Floor lamp

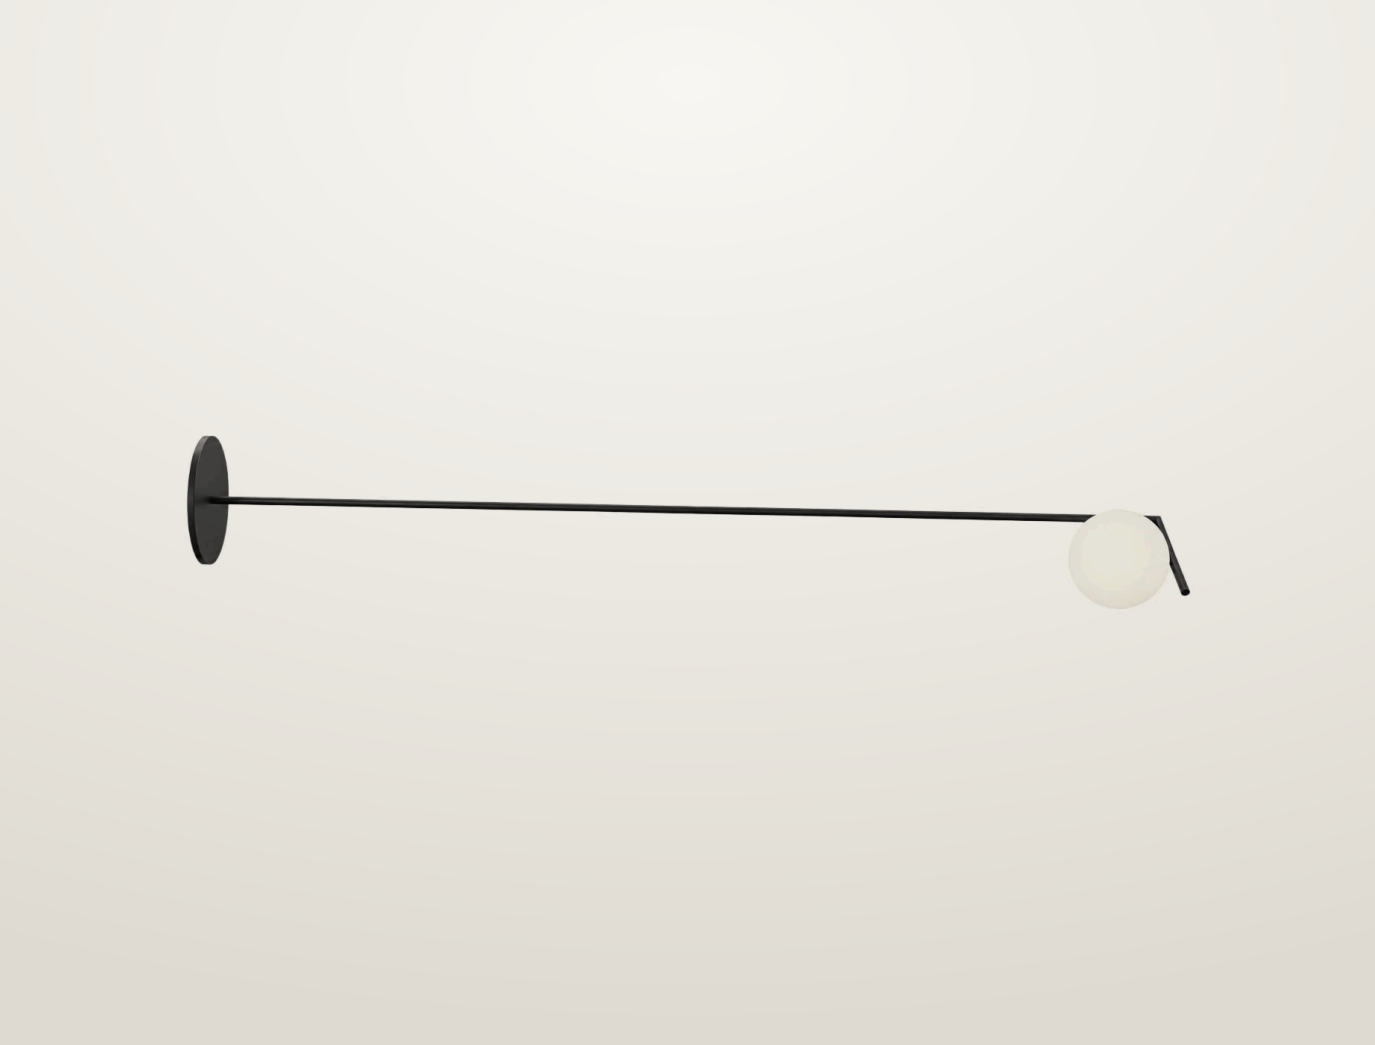


Floor lamp. 8 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **8 W**	Voltage **230 V AC**	Luminous flux **630 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Floor**
Finishes **Black**		

Dimensions

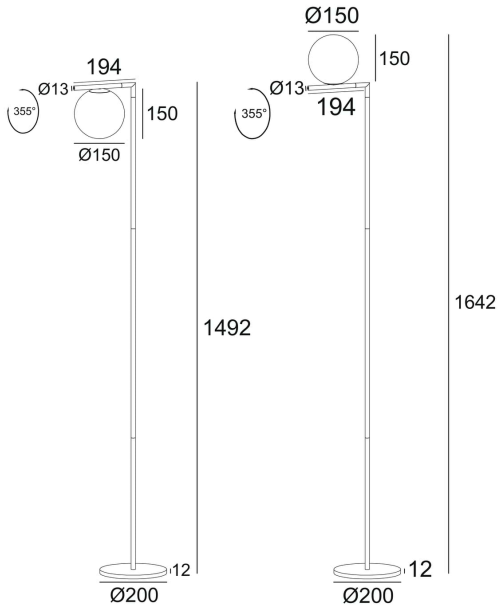


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
ML0018	8 W	230 V AC	630 lm	97 CRI	Ø200 x H1492 / H1642 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0018, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


ML0018, 8 W, 15° beam

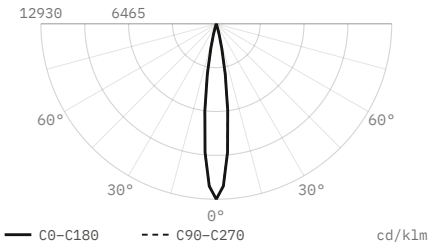


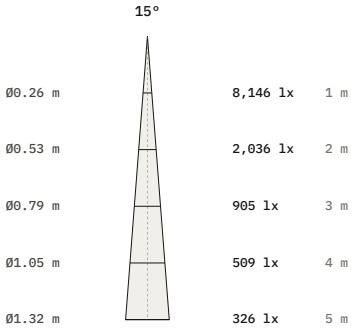

Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	8,146 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø200 × 1492 mm
Data	Calculated from catalogue data


ML0018, 8 W, 24° beam

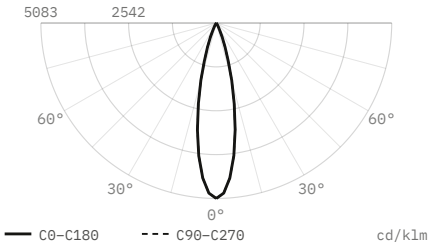


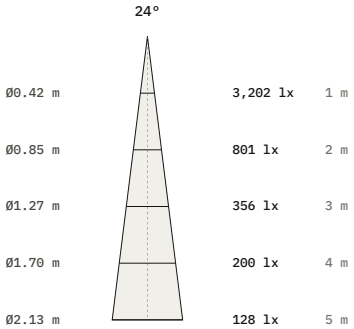

Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	3,202 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø200 × 1492 mm
Data	Calculated from catalogue data


ML0018, 8 W, 36° beam

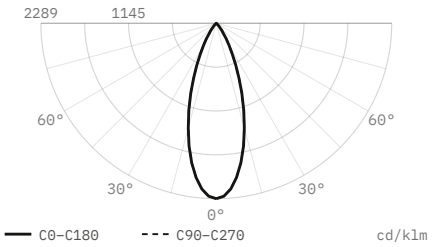


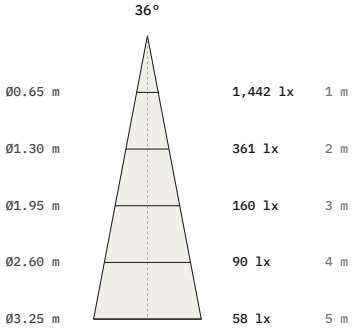

Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	1,442 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø200 × 1492 mm
Data	Calculated from catalogue data

ML0018, 8 W, 50° beam

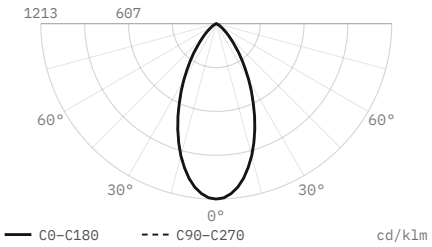

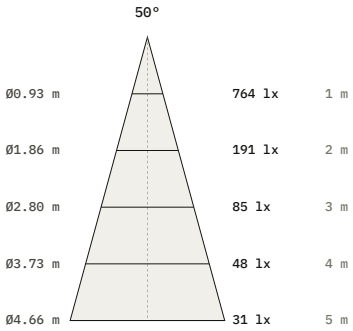

Luminous flux	**630 lm**
Efficacy	**79 lm/W**
Peak intensity	**764 cd, 1,213 cd/klm**
Beam angle (50%)	**50°**
Field angle (10%)	**91.1°**
Cut-off angle (2.5%)	**57.5°**
Flux 0–30° / 30–60° / 60–90°	**64.8 / 33.6 / 1.5 %**
Size	**Ø200 × 1492 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.