Downlights

Moon DL1184

Recessed spotlight




Recessed spotlight. 7 W. Four beam angles, 15° to 55°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø60 mm
- LED source: Citizen

Power	Voltage	Luminous flux
7 W	max 19 V	630 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	15°, 24°, 36°, 55°
IP rating	**Certifications**	**Mounting**
IP20	CE	Recessed
Finishes		
White		

Dimensions

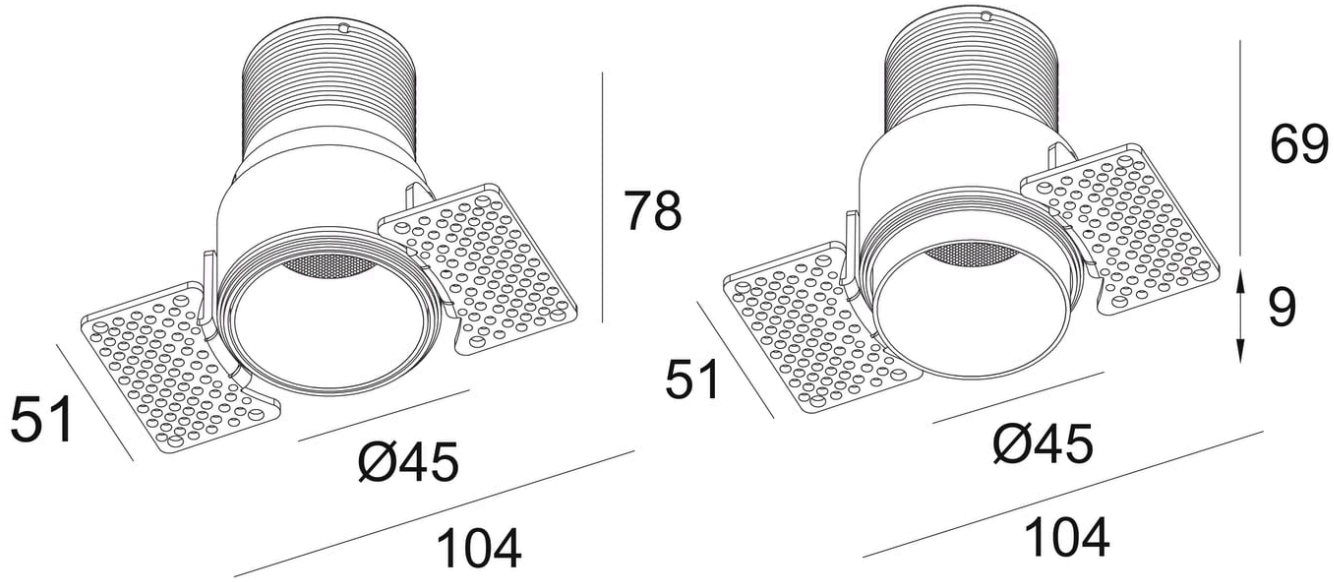


Models


Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1184	Trimless	7 W	max 19 V	630 lm	97 CRI	Ø45 x H78 mm	Ø60 mm	15° 24° 36° 55°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1184, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1184, 7 W, 15° beam

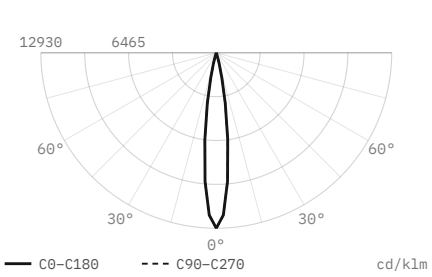


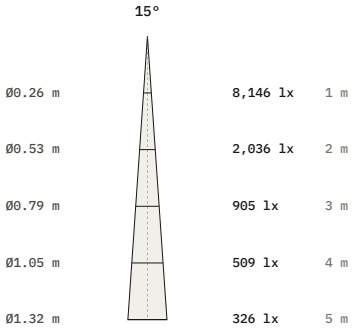

Luminous flux	630 lm
Efficacy	90 lm/W
Peak intensity	8,146 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø45 × 78 mm
Data	Calculated from catalogue data


DL1184, 7 W, 24° beam

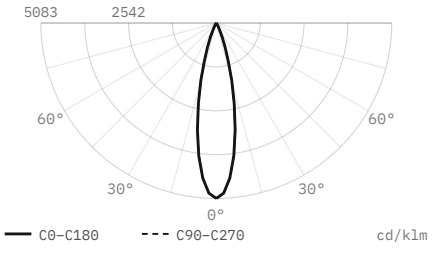


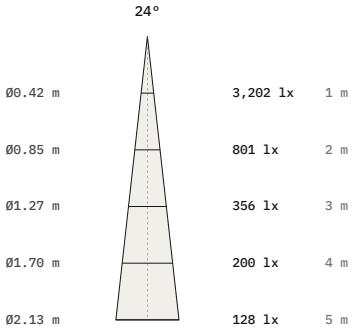

Luminous flux	630 lm
Efficacy	90 lm/W
Peak intensity	3,202 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø45 × 78 mm
Data	Calculated from catalogue data


DL1184, 7 W, 36° beam

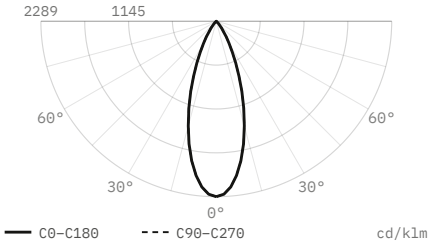


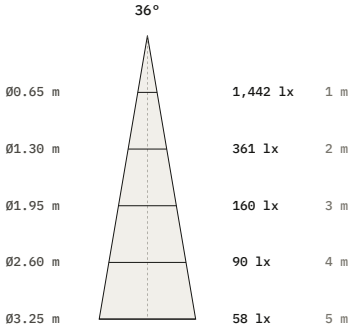

Luminous flux	630 lm
Efficacy	90 lm/W
Peak intensity	1,442 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø45 × 78 mm
Data	Calculated from catalogue data

DL1184, 7 W, 55° beam

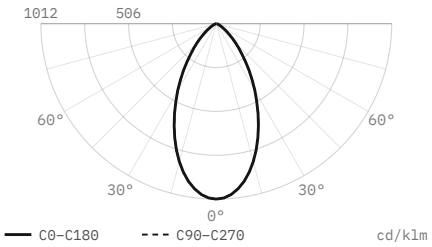

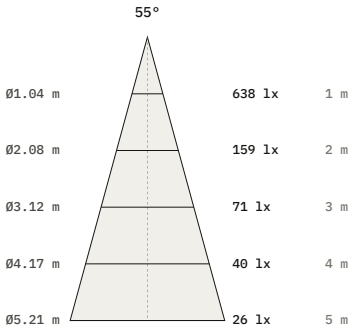

Luminous flux	630 lm
Efficacy	90 lm/W
Peak intensity	638 cd, 1,012 cd/klm
Beam angle (50%)	55°
Field angle (10%)	100.2°
Cut-off angle (2.5%)	63°
Flux 0–30° / 30–60° / 60–90°	58.2 / 38.8 / 3 %
Size	Ø45 × 78 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.