
Wall Lamps

Oval Indoor WL0116

Wall light

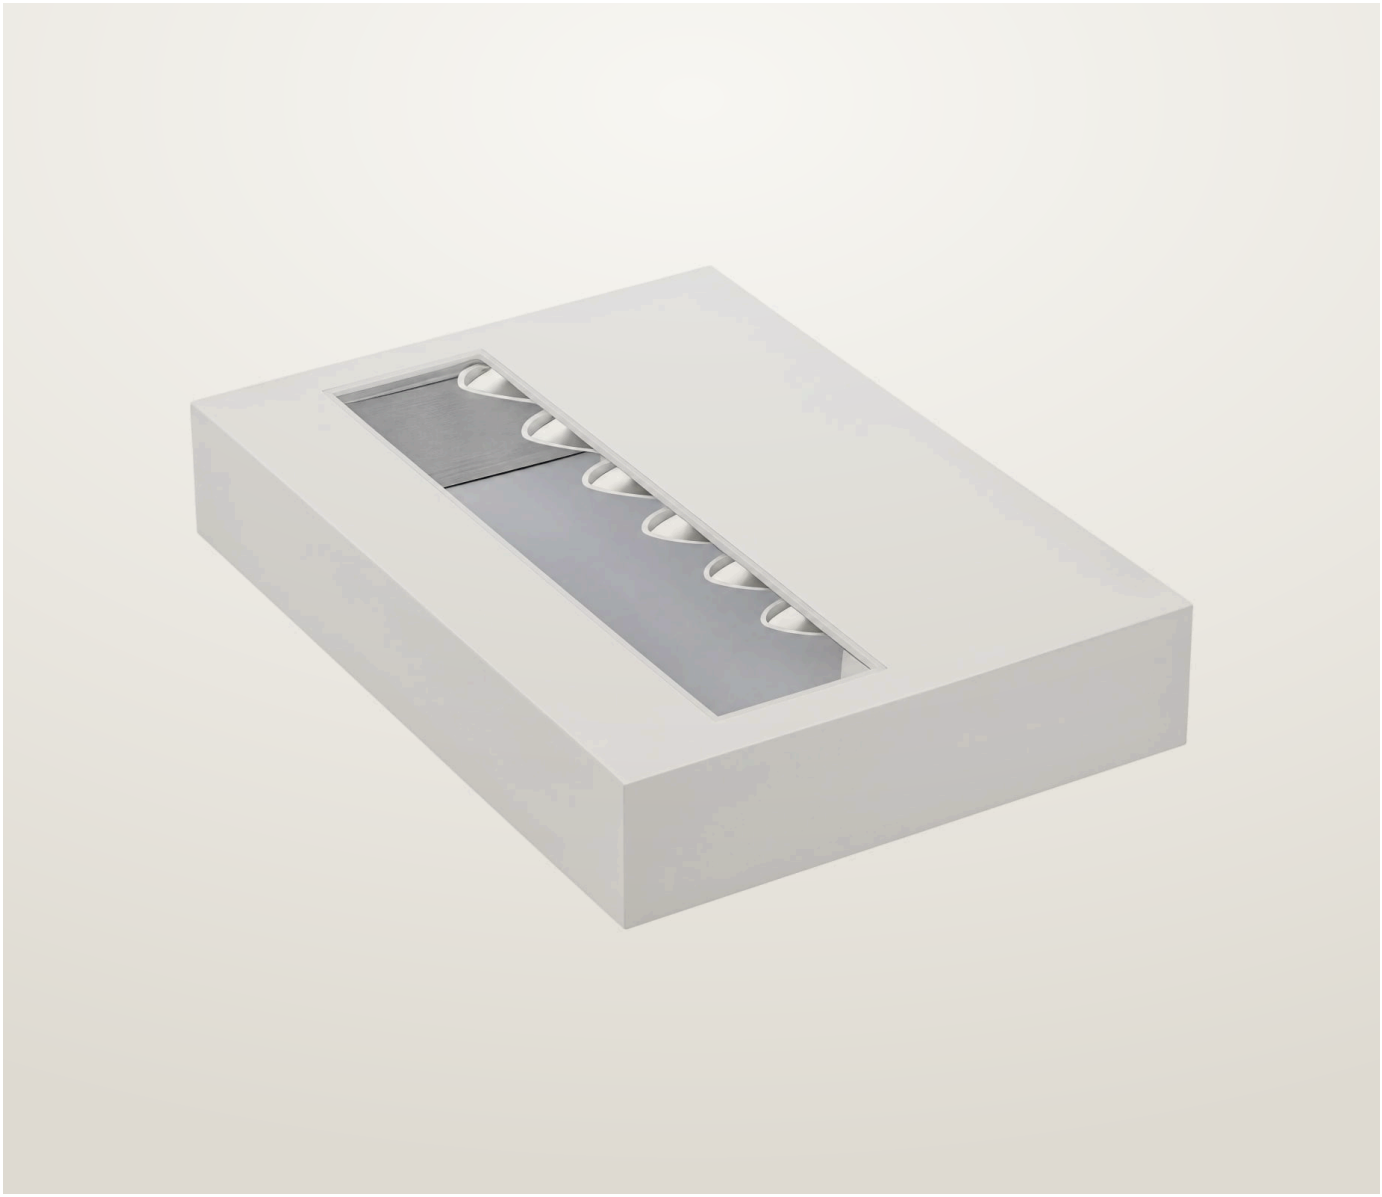


Wall light. 15 W. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **15 W**	Voltage **230 V AC**	Luminous flux **1170 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	IP rating **IP20**
Certifications **CE**	Mounting **Surface, Wall**	Finishes **Black**

Dimensions

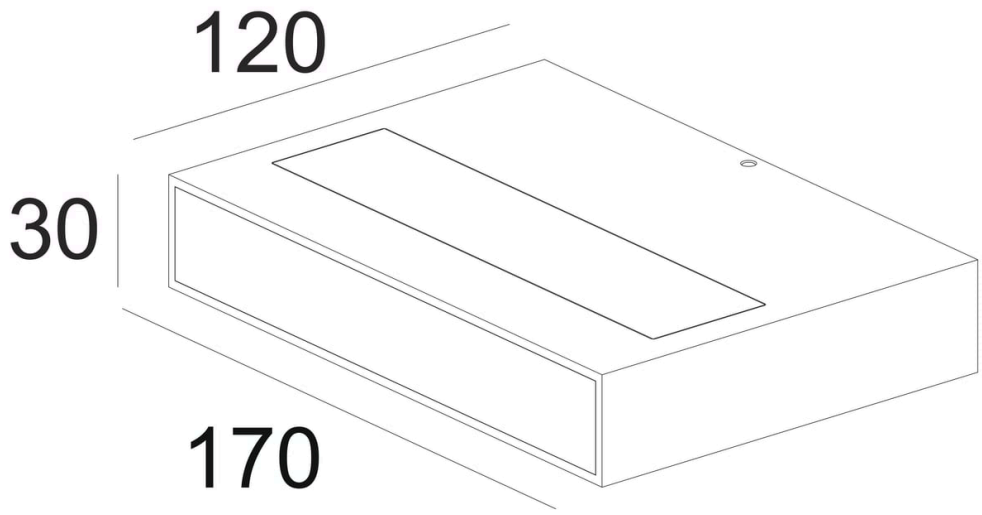


Models


Code	Power	Voltage	Flux	CRI	Size
WL0116	15 W	230 V AC	1170 lm	97 CRI	170 × 120 × 30 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0116, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WL0116, 15 W, wide distribution

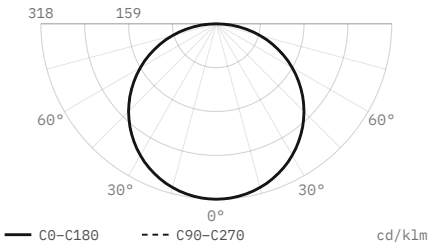

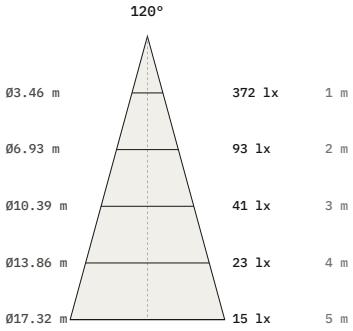

Luminous flux	**1,170 lm**
Efficacy	**78 lm/W**
Peak intensity	**372 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**170 × 120 × 30 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.