
Wall Lamps

Oval Indoor WL0144

Wall light

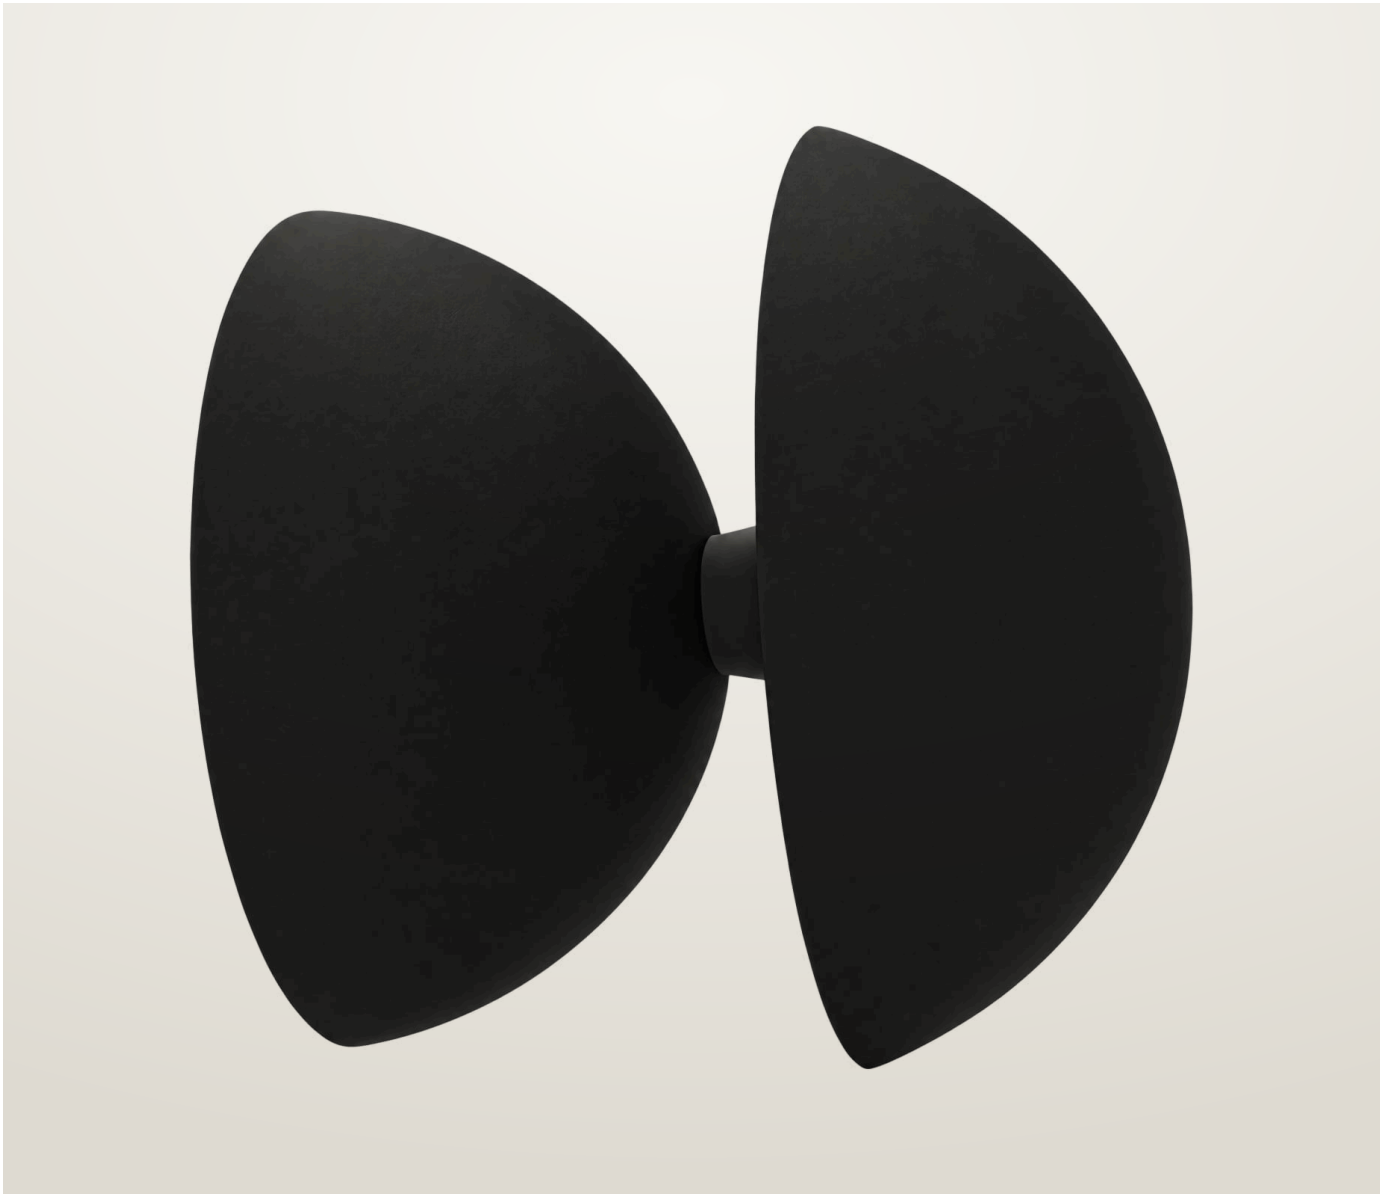


Wall light. 8 W. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
8 W	230 V AC	960l lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	**Mounting**	**Finishes**
CE	Surface, Wall	Black

Dimensions

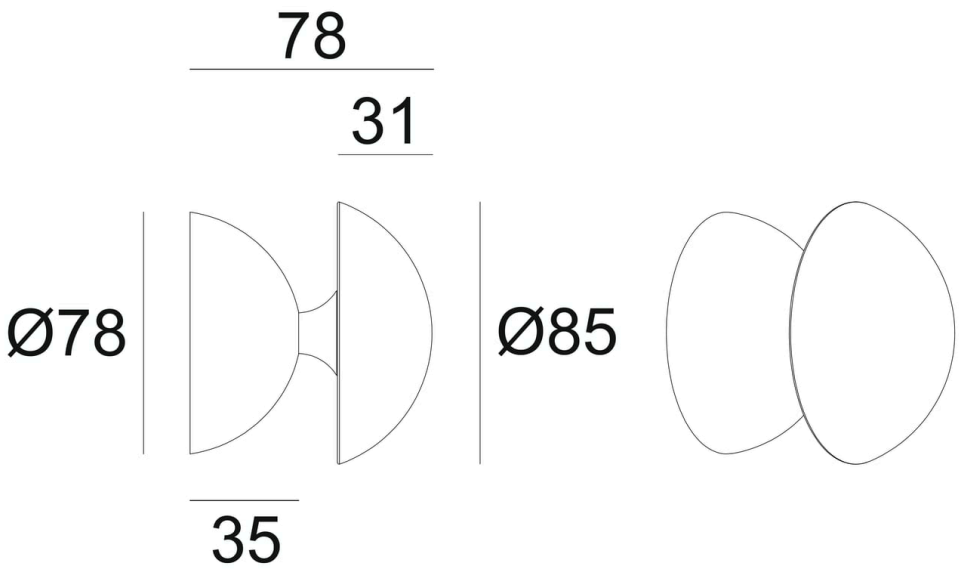


Models


Code	Power	Voltage	Flux	CRI	Size
WL0144	8 W	230 V AC	960l lm	97 CRI	Ø85 × 78 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0144, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WL0144, 8 W, wide distribution

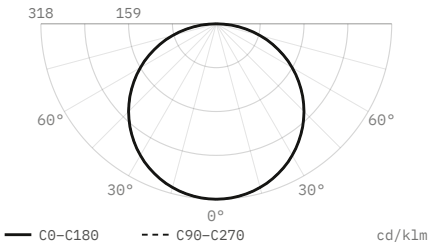

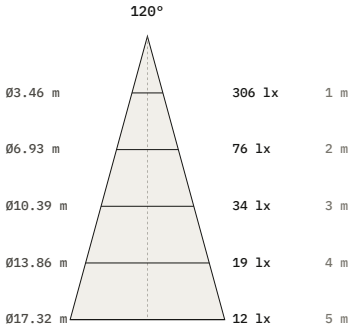

Luminous flux	**960 lm**
Efficacy	**120 lm/W**
Peak intensity	**306 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø85 × 78 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.