Outdoor

T1-06-8

Outdoor luminaire




Outdoor luminaire. 15 W. 2700, 3000, 4000, 5700 K. IP65. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
15 W	33–40 V	2700 K, 3000 K, 4000 K, 5700 K
CRI	**IP rating**	**Mounting**
97 CRI	IP65	Wall
Control	**Finishes**	
On/Off	Black	

Dimensions

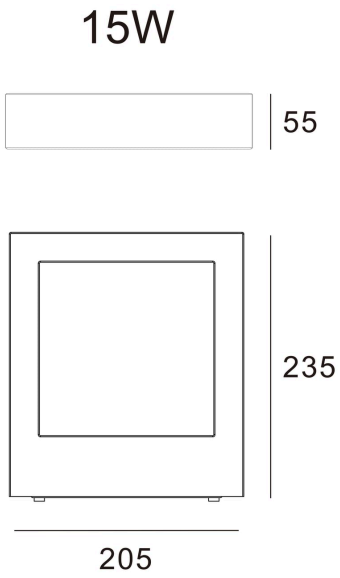


Models


Code	Power	Voltage	CRI	Size	Notes
T1-06-8	15 W	33–40 V	97 CRI	205 × 235 × 55 mm	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for T1-06-8, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

T1-06-8, 15 W, wide distribution

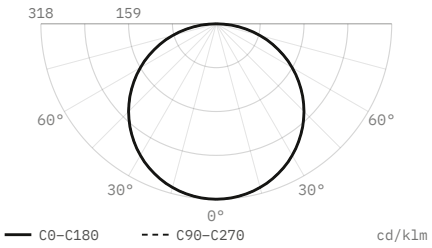

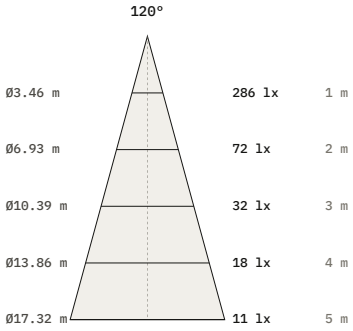

Luminous flux	900 lm
Efficacy	60 lm/W
Peak intensity	286 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	235 × 205 × 55 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.